

MENTO, NE UTILIZZARMI
OGNI INFRAZIONE CO
A RISERVA DI TUTTI

WARE A TERZI O RIPROD
TERZI SENZA AUTORIZZ
RISARCIMENTO DEI DAN

1:1

TWO CORE CABLE
LEITUNG ZWEIADRIG
CABLE A DEUX CONDUCTEURS
CAVO A DUE CONDUTTORI

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO


MAX.50N $\vartheta = 20^{\circ}\text{C}$

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO


} R 15 MIN, $\angle 90^\circ$

* ABRASION RESISTANT PRINT
ABRIEFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

} RAL 9001

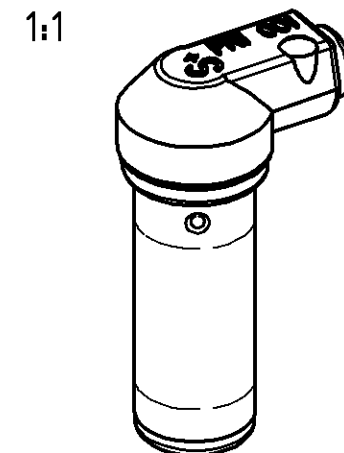

GENERAL SPECIFICATION:					JED-334.0	
FURTHER TECHNICAL DATA:						
DOC. CODE:				SHEET: TO		
GENERAL TOLERANCES						
		RANGE OF NOMINAL DIMENSIONS (± mm)				
CLASS	I)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°
FINE		0.5	1.0	1.5	2.0	
MEDIUM		1.0	2.0	3.0	4.0	
COARSE	X	2.0	3.5	5.0	6.5	
TAPPED HOLES ACC. ISO 4038 / JED-152						
1) TOLERANCE CLASS APPLIED CROSSMARKED						

				Pro/ENGINEER DRAWING COPYRIGHT	
				DATE	SIGNATURE
				DRAWN	
				98-12-14	HARNISCHM.
				CHECKED	
				98-12-14	HOEFLER
				EXPERT CODE	
				7 6 0	
				MASS	SCALE
				/	1:1
				KG	2:1
				SIZE	TRI
				A 2	141
					
DCN-NO.	REV.	DATE			