
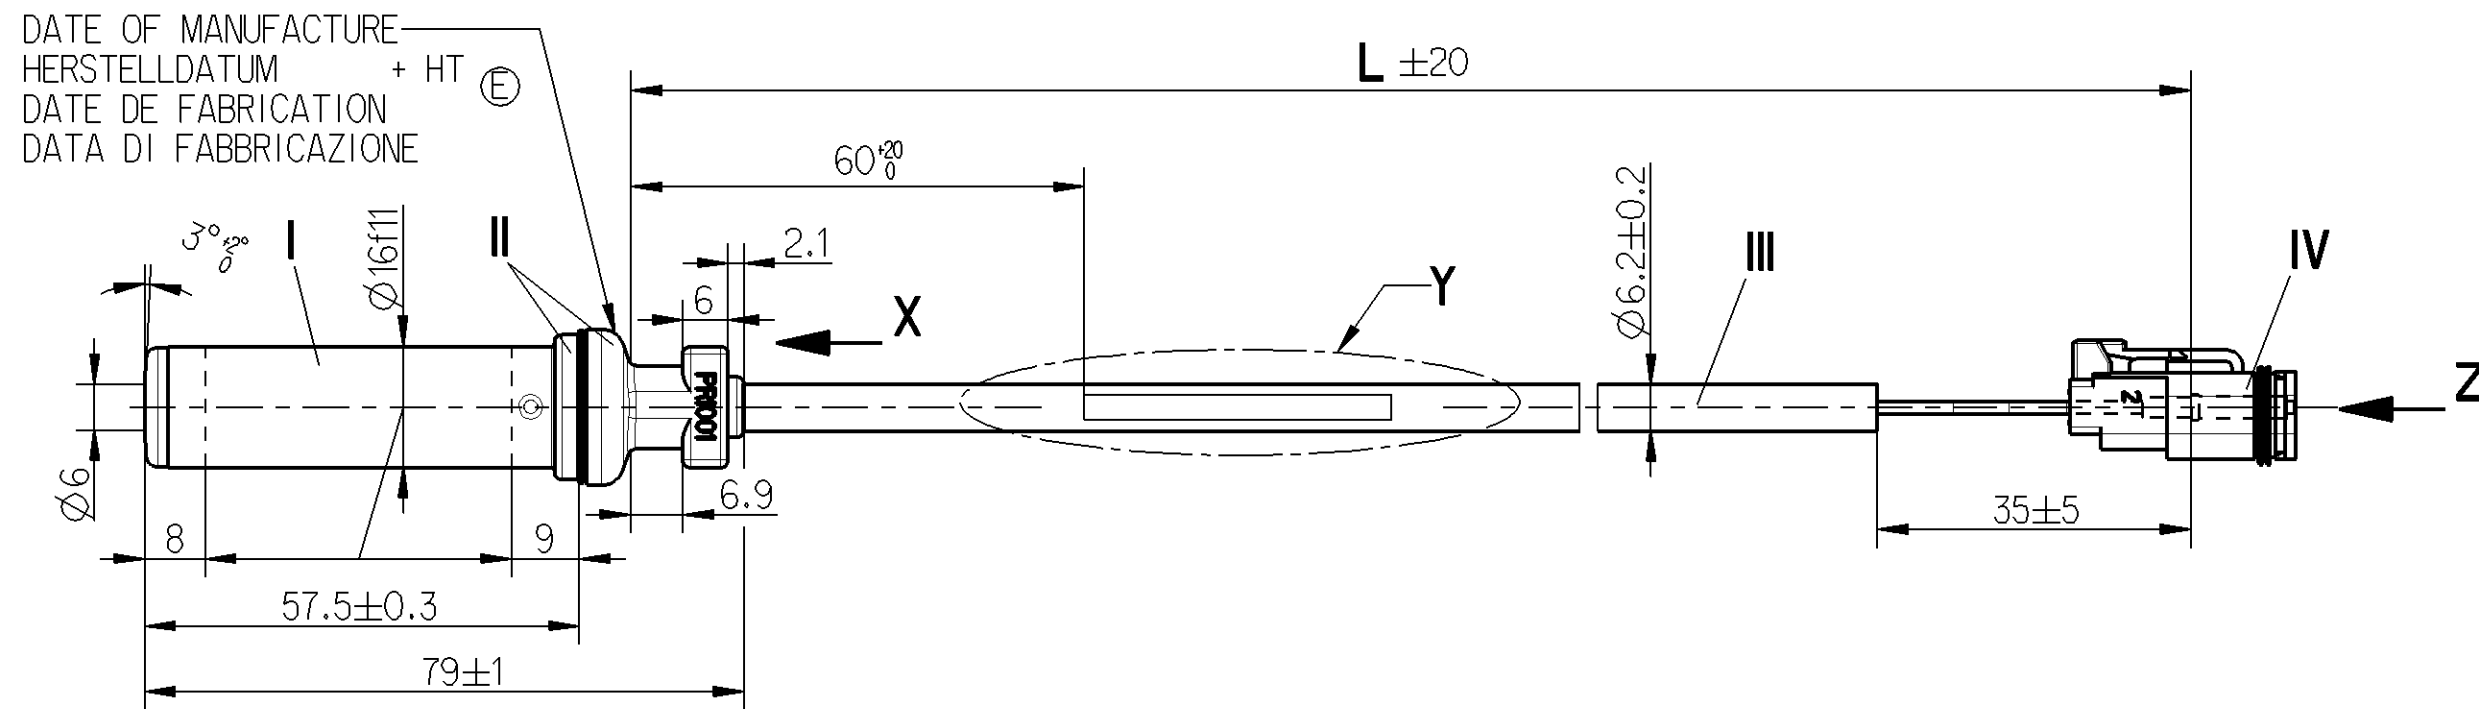
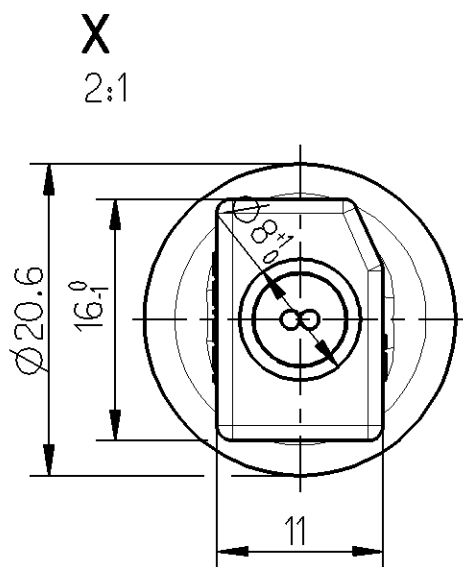


STAMP PART NO
AUFDRUCK TEILE NR. *
MARQUAGE DE NO. DE PIECE
STAMPIGLIATURA DEL CODICE



WABCO-NO. VOLVO-NO.	L (mm)	VIEW Z	MASS [kg]	WABCO-NO. VOLVO-NO.	L (mm)	VIEW Z	MASS [kg]
441 032 972 0 21361894 (E)	3800	CODE C 	0.232	441 032 961 0 21361883 (E)	2250	CODE A 	0.156
441 032 973 0 21361895 (E)		CODE D 		441 032 962 0 21361884 (E)		CODE B 	
441 032 974 0 21361898 (E)	4300	CODE A 	0.256	441 032 963 0 21361882 (E)	2650	CODE A 	0.175
441 032 975 0 21361899 (E)		CODE B 		441 032 964 0 21361893 (E)		CODE B 	
				441 032 965 0 21361900 (E)	3050	CODE A 	0.195
				441 032 968 0 21361881 (E)	4100	CODE A 	0.247

TWO CORE CABLE
LEITUNG ZWEIADRIG
CABLE A DEUX CONDUCTEURS
CAVO A DUE CONDUTTORI

THERMORAD
2x0.96mm²

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO

MAX.50N $\vartheta = 20^{\circ}\text{C}$

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO

R 15 MIN, $\angle 90^\circ$

* ABRASION RESISTANT PRINT
ABRIEFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

RAL 9001

DEGREE OF PROTECTION
SCHUTZART
DEGRE DE PROTECTION
GRADO DI PROTEZIONE

IP 68
ISO 20653

THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO TERMICO D'APPLICAZIONE	}	I -40 °C...+200 °C [1000h] +210 °C [1h]
		II -40 °C...+150 °C +180 °C [1h]
		III -40 °C...+180 °C +220 °C [1h]
		IV -40 °C...+125 °C


CONNECTOR SYSTEM ACCORDING TO CUSTOMER SPECIFICATION. WABCO DOES NOT PROVIDE ANY WARRANTY RELATING TO CONNECTOR-SYSTEM DEFECTS
STECKSYSTEM NACH KUNDENANGABEN. FUER MAENDEL AM STECKSYSTEM KEINE GEWAERLEISTUNG DURCH WABCO
SYSTEME DE CONNECTEURS SUIVANT SPECIFICATION DU CLIENT. WABCO NE FOURNIT AUCUNE GARANTIE RELATIVE AUX DEFAUTS DANS LE SYSTEME DE CONNECTEURS
SISTEMA DI CONNETTORI SECONDO SPECIFICA DEL CLIENTE. WABCO NON FORNISCE NESSUNA GARANZIA SULLE DIFETTI DI SISTEMA DI CONNETTORI

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

441 032 390 0 (E)

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTIONS-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISTRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

441 032 100 0

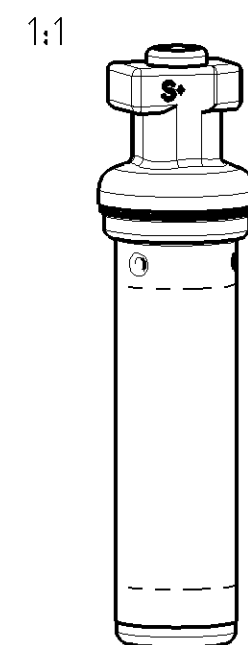

General Specification: JED-334-O						Copyright WABCO®			WABCO																												
Further Technical Data:						Date		Signature		INDUCTIVE SENSOR WITH PLUG STABSSENSOR MIT STECKER CAPTEUR AVEC FICHE SENSORE INDUTTIVO CON SPINA																											
Doc. Code:		Sheet: To				Drawn																															
General Tolerances JED-261						2009-02-25		Harnischmacher																													
								Checked																													
<table><tr><td rowspan="4">Class 1)</td><td colspan="5">Range of Nominal Dimensions (± mm)</td><td rowspan="4"></td></tr><tr><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td></tr><tr><td>Fine</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td>X</td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td><td>±3°</td></tr></table>						Class 1)	Range of Nominal Dimensions (± mm)								≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Fine	0.5	1.0	1.5	2.0	Medium	1.0	2.0	3.0	4.0	Coarse	X	2.0	3.5	5.0	6.5	±3°	2009-06-04	
							Class 1)	Range of Nominal Dimensions (± mm)																													
								≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																										
Fine	0.5	1.0	1.5	2.0																																	
Medium	1.0	2.0	3.0	4.0																																	
Coarse	X	2.0	3.5	5.0	6.5	±3°																															
		Expert																																			
		Hoefler																																			
Tapped Holes acc.						Mass		Scale		Material No.		Date of first issue: 2003-05-15																									
						/ KG		1:1 2:1		441 032 970 0		Doc.Code		Language		Sheet																					
												053		ML		1/1																					
1) Tolerance Class Applied Crossmarked						Size		CAD System				ECN-No.		Revision		Techn. Resp.		Replacement for																			
						A 2		Pro/E				120499		12x E		6310		884 016 650 0																			