

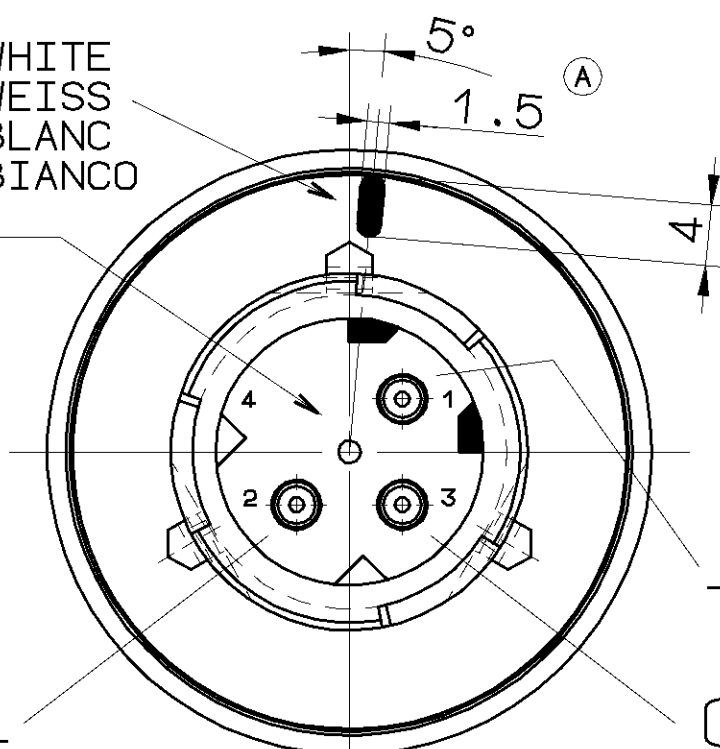


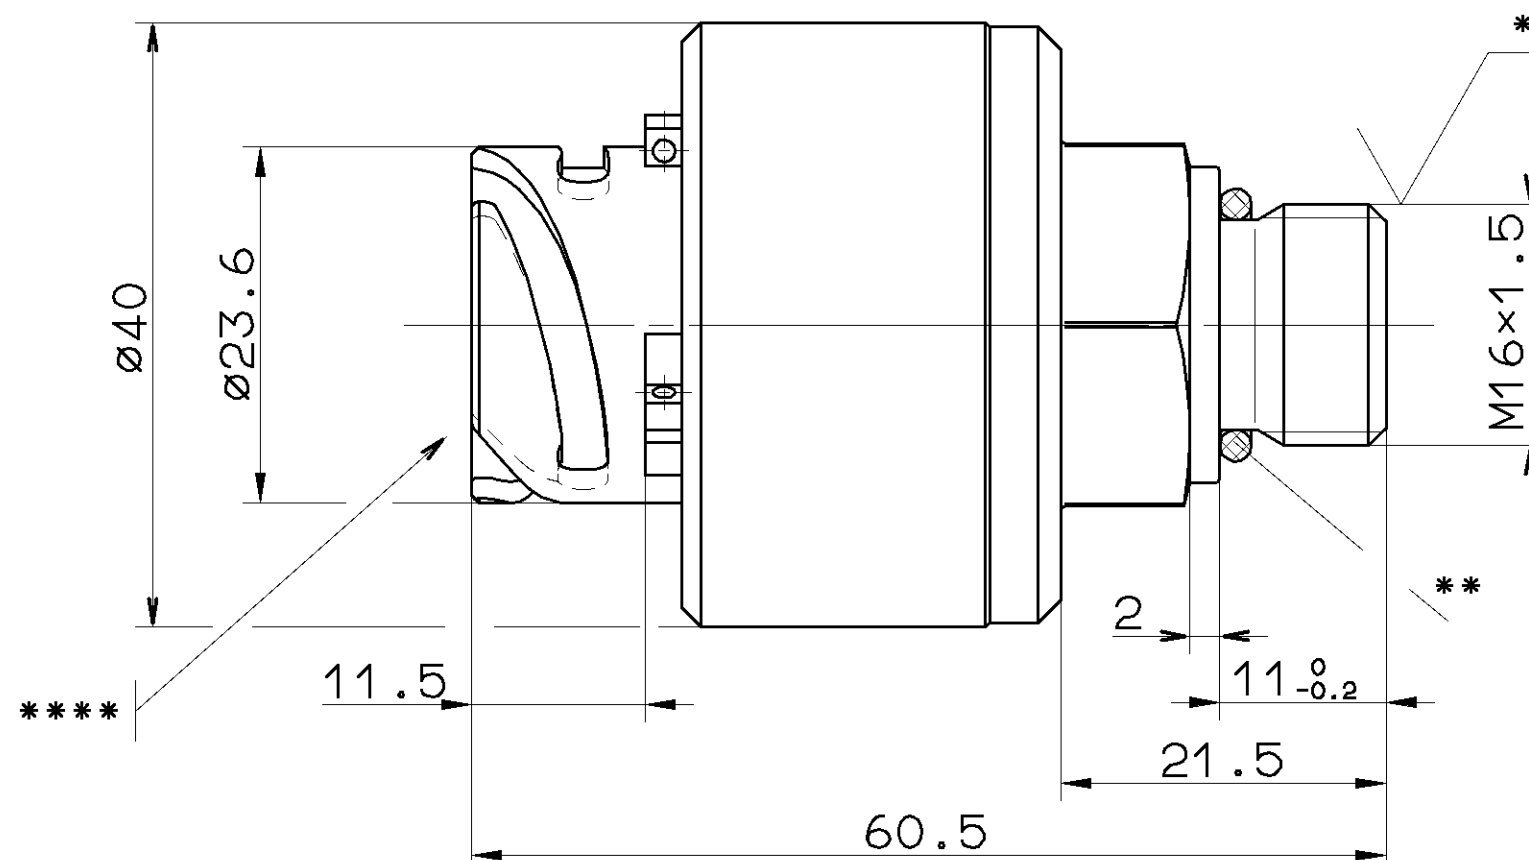

LA CONNESSIONE ALL'ATMOSFERA DEVE PASSARE ATTRAVERSO
UN CABLAGGIO STAGNO IN UNA ZONA PROTETTA (COME LA CABINA DEL CONDUCENTE).

* COMPLETE DEVICE WITH MOUNTED COUPLING
KOMPLETTES GERAET MIT MONTIERTER KUPPLUNG
APPAREIL COMPLET AVEC L' ACCOUPLEMENT MONTE
APPARECCHIO COMPLETO CON ACCOPPIAMENTO MONTATO




MATING PART
GEGENSTUECK
PENDANT
ACCOPIAMENTO



ISO 6149-M16×1.5

HYSTERESIS
HYSTERESE
HYSTERESIS
ISTERESI

$\leq 0.2\%FS$

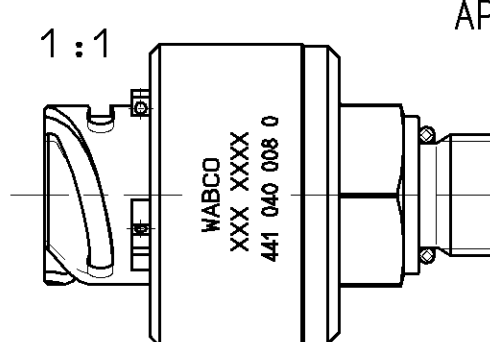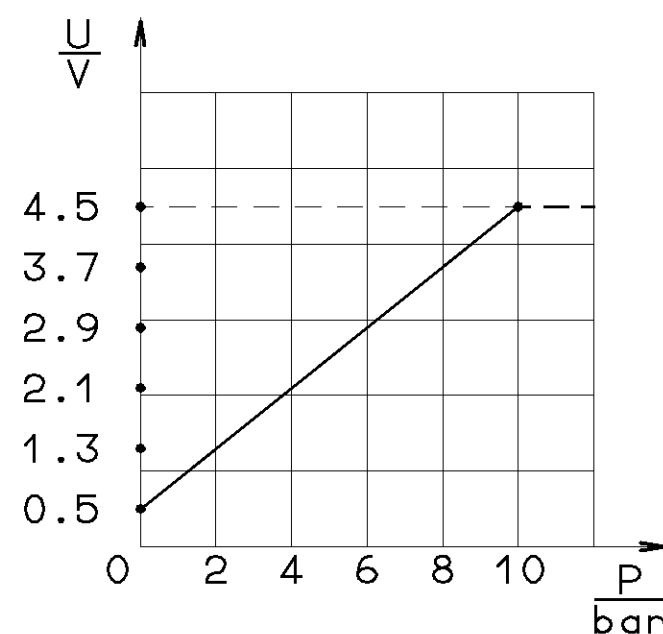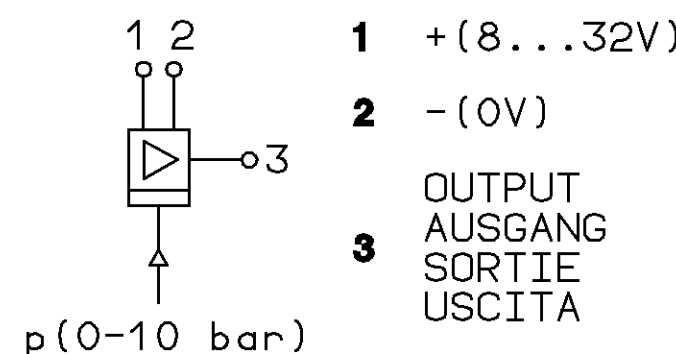

GENERAL SPECIFICATION: JED-334										CADAM-DRAWING COPYRIGHT					WABCO									
FURTHER TECHNICAL DATA: 441 040 008 0										DATE										SIGNATURE				
DOC. CODE: 435 SHEET: 1 TO END																								
GENERAL TOLERANCES																								
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)				▽				96-10-01 PFENNIG CHECKED: 96-10-01 THIMM STANDARDIZATION:					PRESSURE SENSOR DRUCKSENSOR CAPTEUR DEPRESSION SENSORE DI PRESSIONE									
		≤50	>50 ≤180	>180 ≤400	>400																			
FINE		0,5	1,0	1,5	2,0	± 3°				MASS		SCALE		PRODUCT IDENTIFICATION NO. 441 040 008 0					DOC. CODE		SHEET			
MEDIUM	×	1,0	2,0	3,0	4,0					0.070 KG		2:1 (1:1)							605		1/1			
COARSE		2,0	3,5	5,0	6,5																			
TAPPED HOLES ACC. ISO 4039 / JED-152										61825					1xA		97-02-27							
1) TOLERANCE CLASS APPLIED CROSSMARKED										DCN-NO.					REV.		DATE							

MATERIAL		MASS		SCALE		PRODUCT IDENTIFICATION NO.					DOC. CODE		SHEET	
						441 040 008 0					605		1/1	
SIZE		T.R.I.		A 2 142						SHAPE CODE		REPLACEMENT FOR 884 010 455 0		