

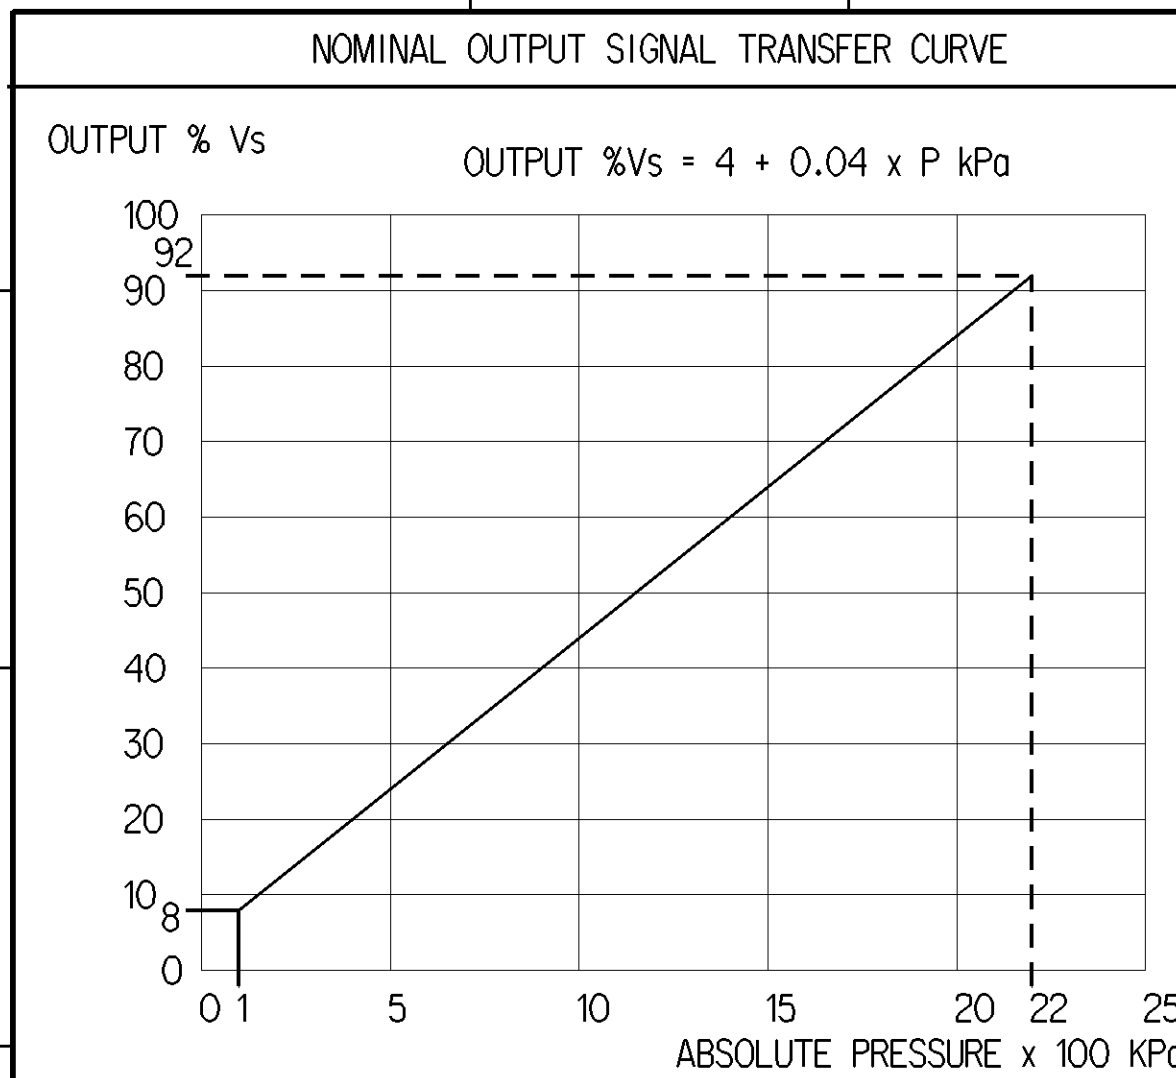
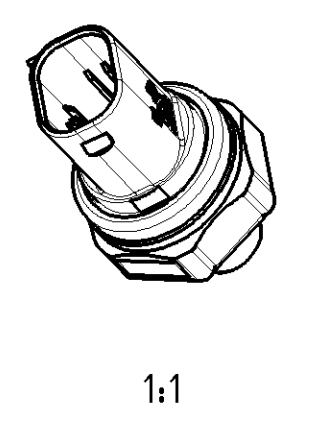
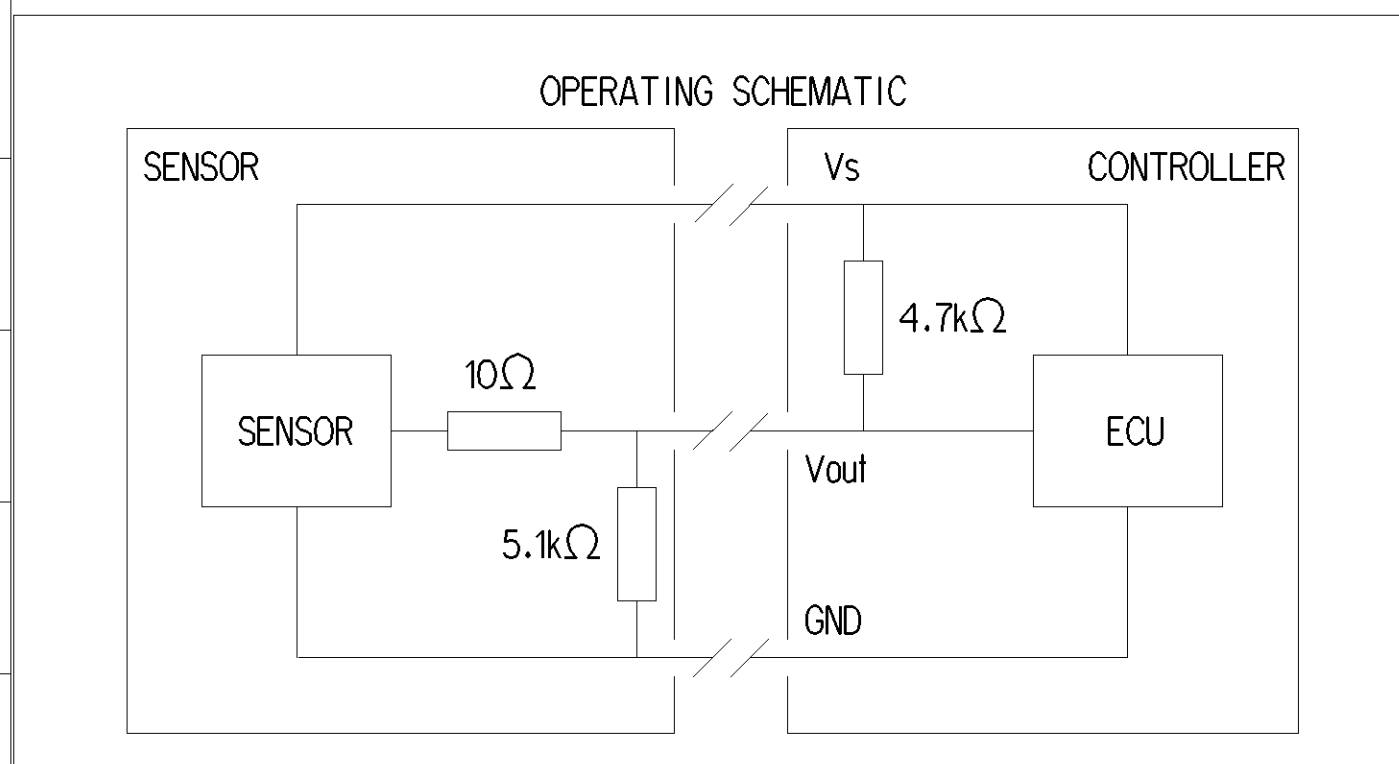
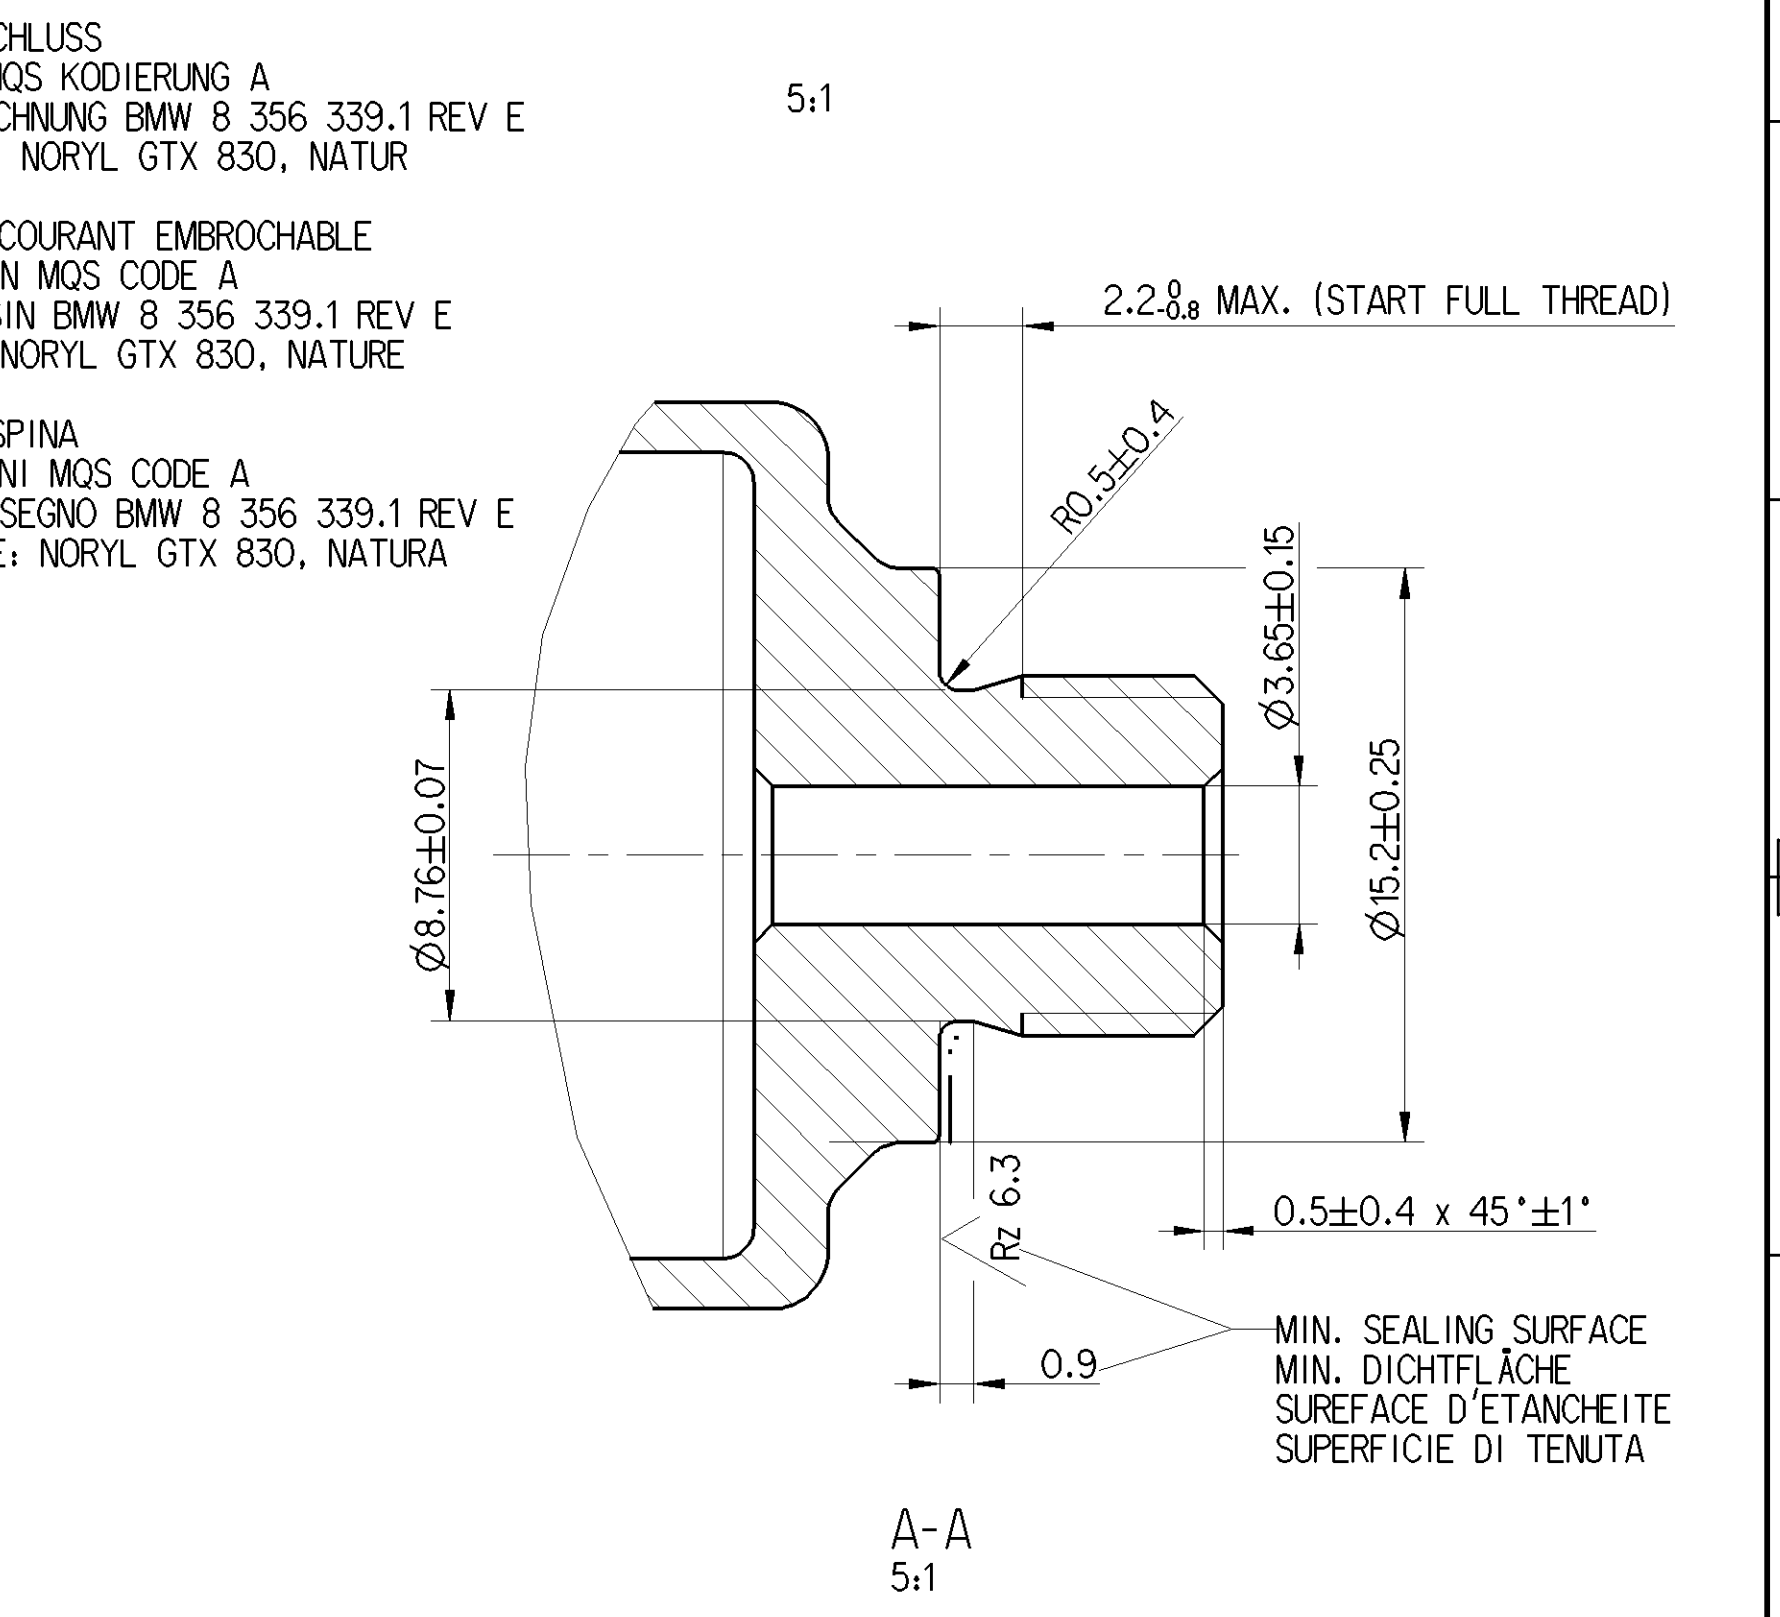
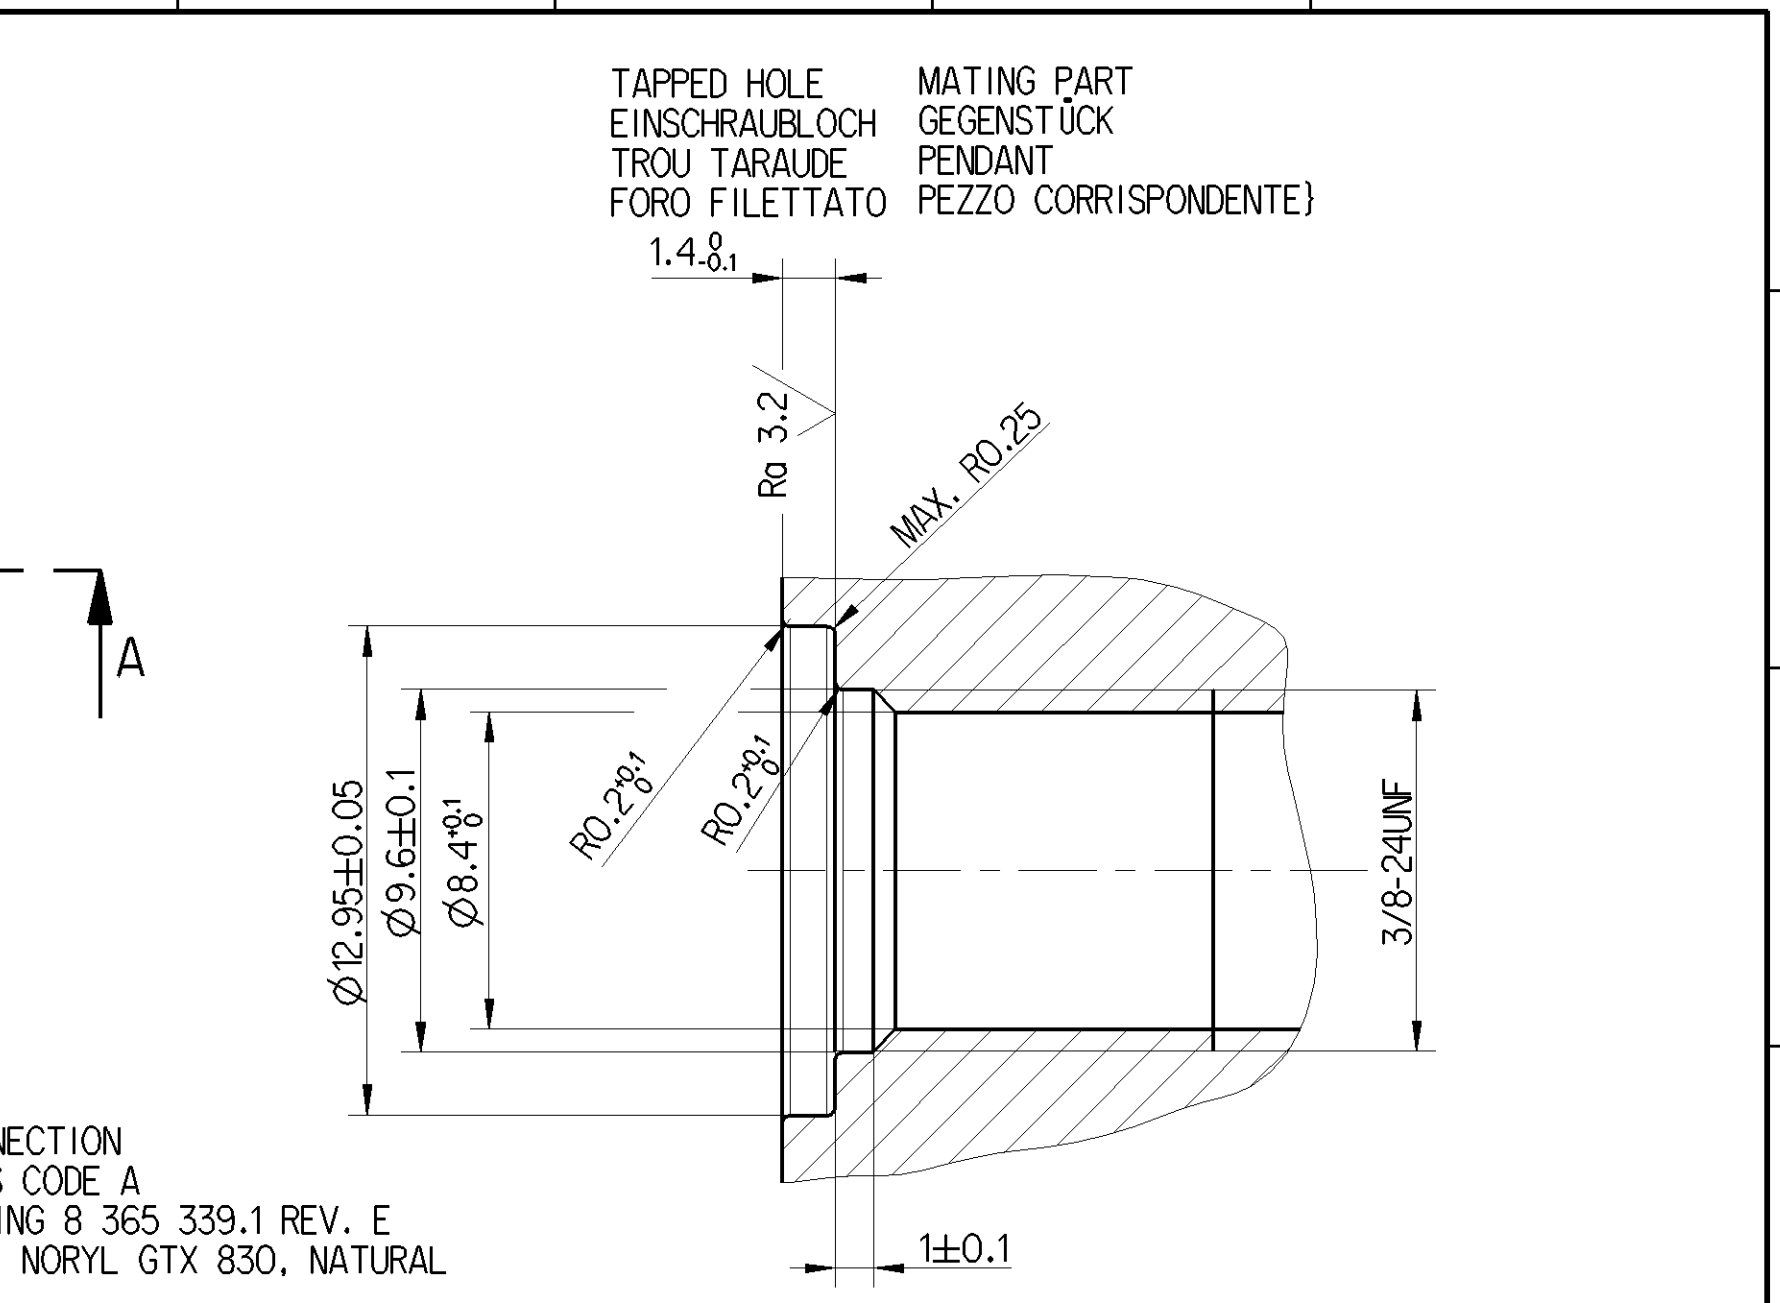


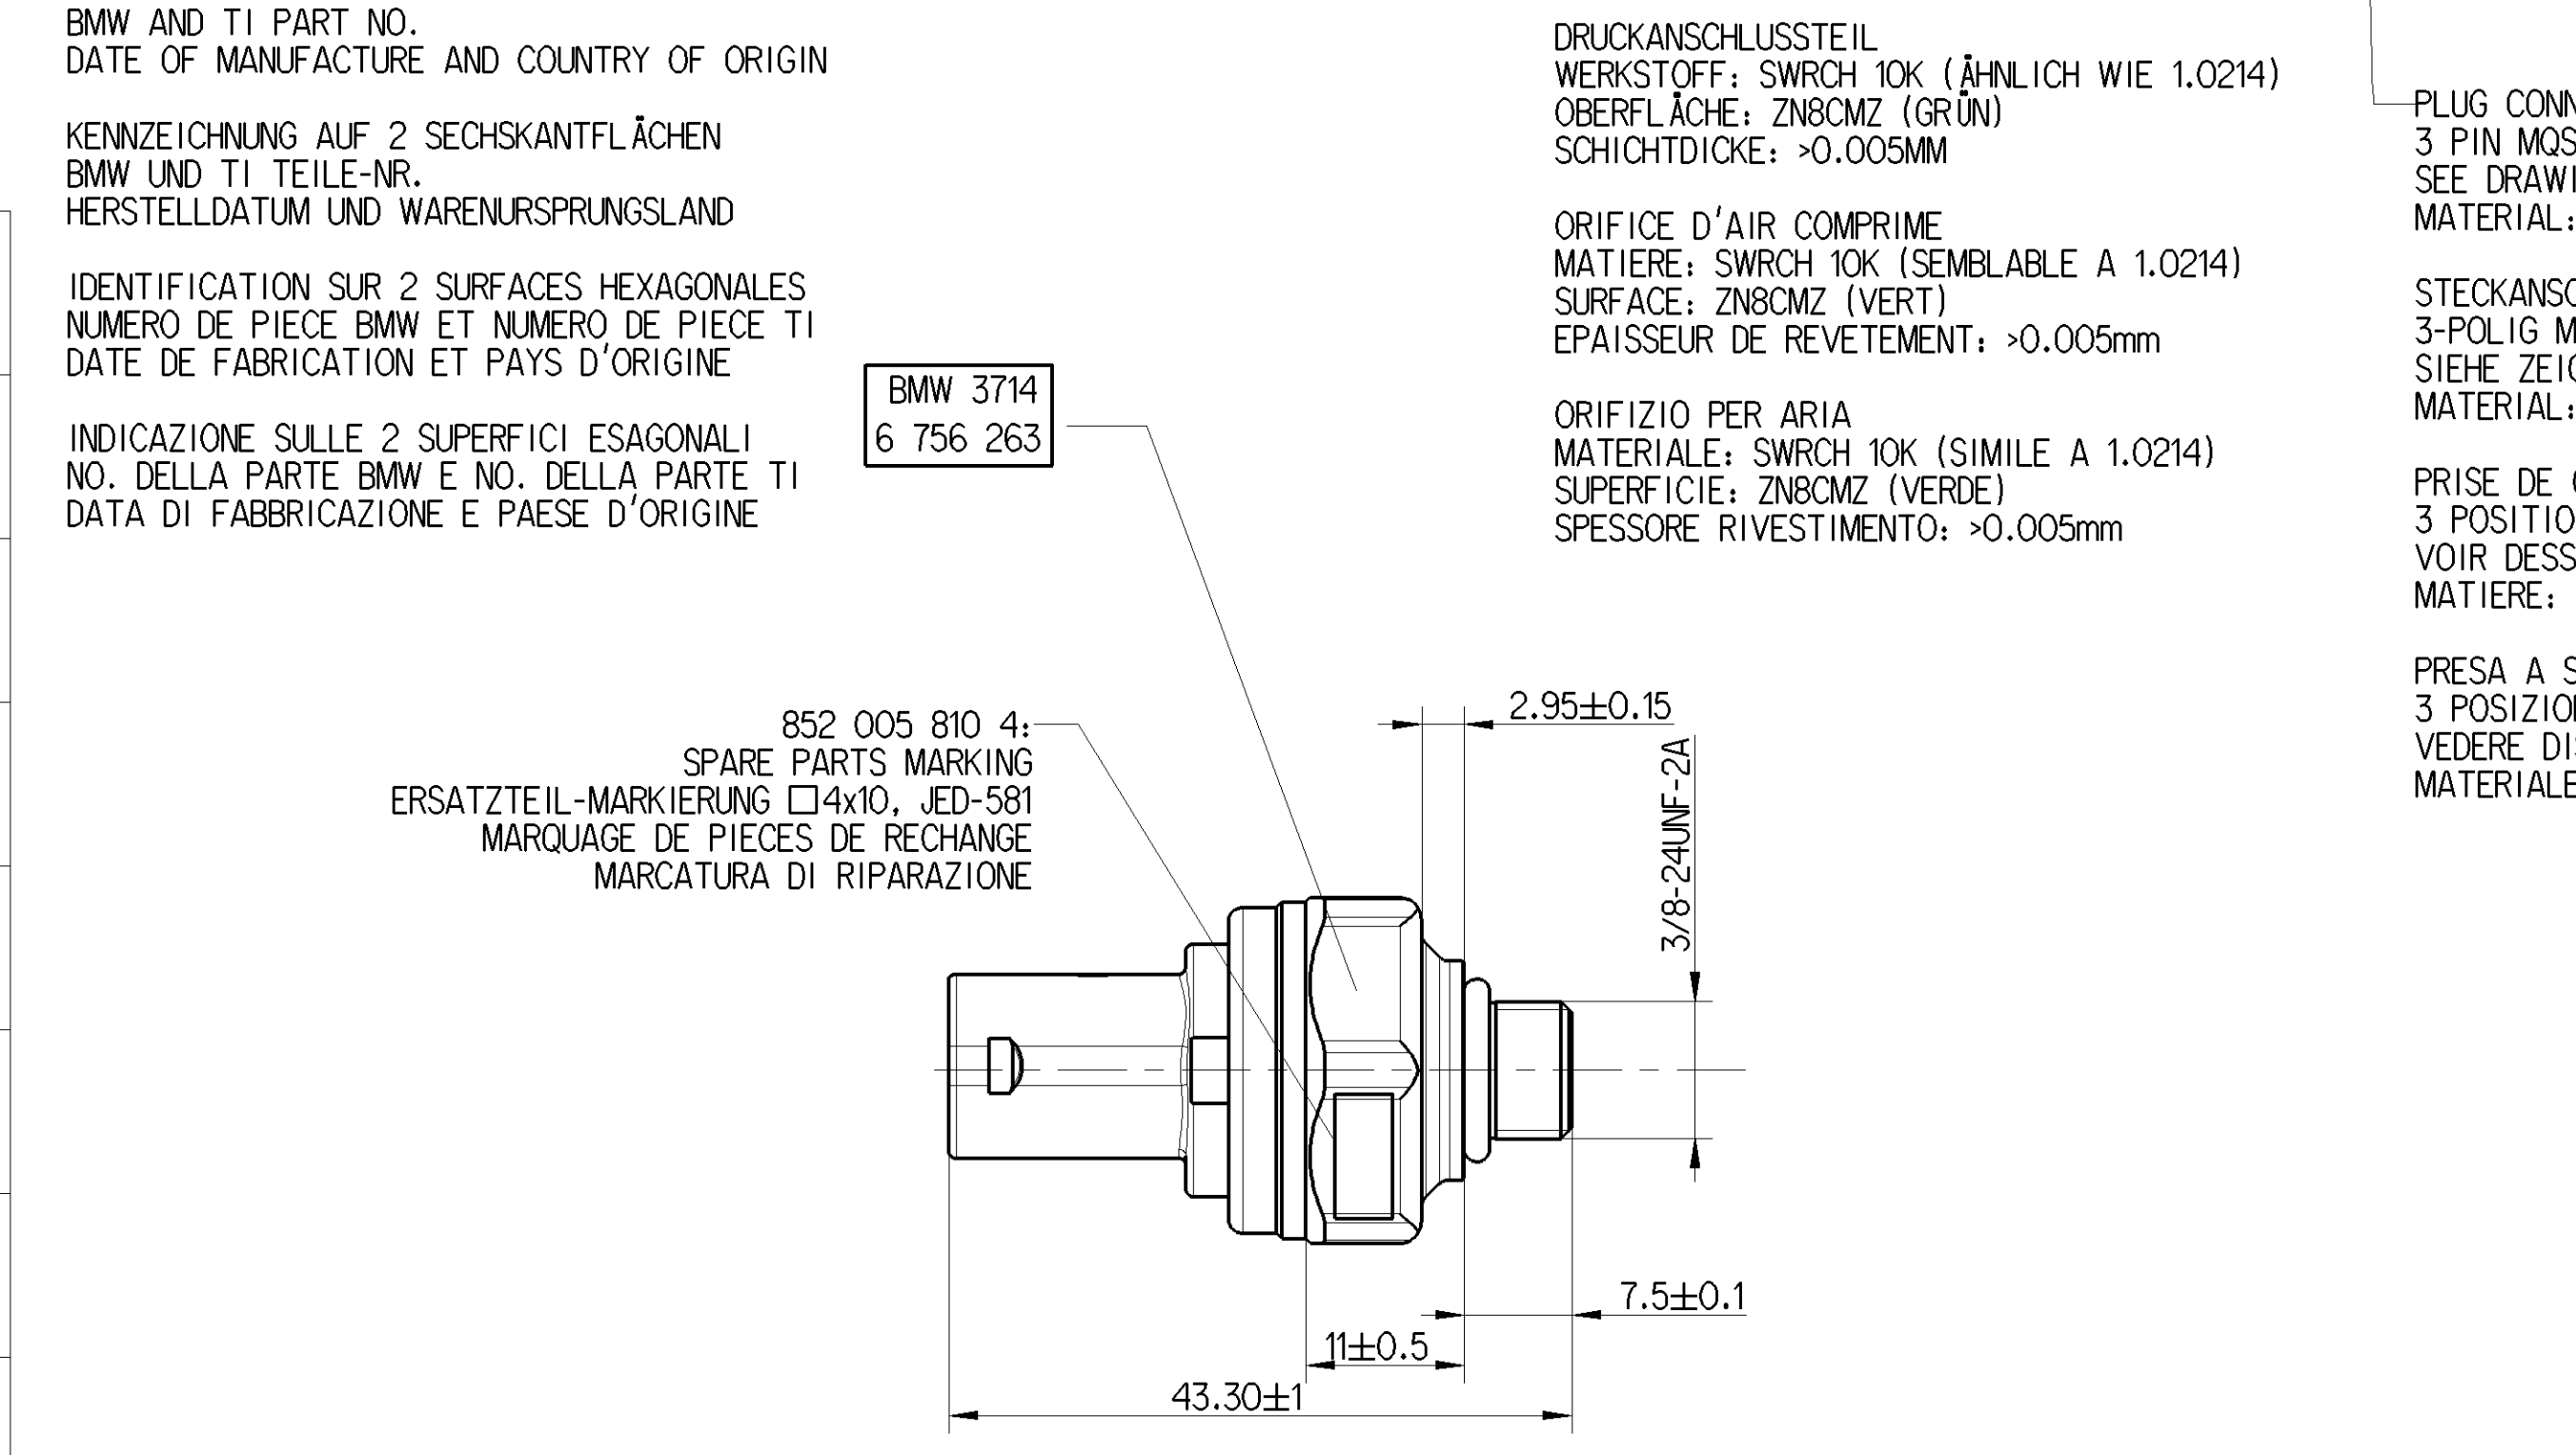

	PRESSURE RANGES DRUCKBEREICHE GAMME DE LA PRESSION CAMPO DELLA PRESSIONE	
	MEASURING PRESSURE MESSBEREICH ZONE DE MESURE CAMPO DI MISURA	0 - 21 bar (RELATIV)
	ADMISSIBLE OVERPRESSURE ZULAESSIGER BETRIEBSDRUCK ADMISSIBLE SURPRESSION AMMISSIBILE SOVRAPRESSIONE	45 bar (MAX. 100 HOURS)
	CHARACTERISTIC CURVE KENNLINIE COURBE CARACTERISTIQUE CARATTERISTICA	
	OFFSET OFFSET DEPLACEMENT DE VALEURS DIFFERIMENTO DI VALORI DI MISURA	SEE NOMINAL OUTPUT SIGNAL CURVE
	SENSITIVITY EMPFINDLICHKEIT SENSIBILITE SENSIBILITA	SEE NOMINAL OUTPUT SIGNAL CURVE
	ACCURACY GENAUIGKEIT PRECISION PRECISIONE	±0.7 bar (-30°C - +80°C) ±0.84 bar (-40°C - -30°C)
	WORKING MEDIUM BETRIEBSMEDIUM FLUIDE DE SERVICE FLUIDO DI ESERCIZIO	AIR LUFT AIR ARIA
	TEMPERATURE RANGE TEMPERATURBEREICH PLAGE DE TEMPERATURES CAMPO DI TEMPERATURA	
	THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH PLAGE DE TEMPERATURE EN UTILISATION CAMPO TERMICO DI APPLICAZIONE	-40°C - +80°C
	MAX. PERMISSIBLE STORAGE TEMPERATURE RANGE MAX. ZUL. LAGERTEMPERATURBEREICH PLAGE DE TEMPERATURES DE STOCKAGE MAX. ADMISSIBLE MAX. CAMPO TERMICO DI IMMAGAZZINAMENTO	-40°C - +150°C
	ELECTRICAL PROPERTIES ELEKTRISCHE EIGENSCHAFTEN CARACTERISTIQUES ELECTRIQUES CARATTERISTICHE ELETTRICHE	
	SUPPLY VOLTAGE (Vs) VORSORUNGSSPANNUNG (Us) TENSION D'ALIMENTATION TENSIONE D'ALIMENTAZIONE	5 ±0.25 Vdc
	MAXIMUM SUPPLY VOLTAGE MAX. VORSORUNGSSPANNUNG MAX. TENSION D'ALIMENTATION MAX. TENSIONE D'ALIMENTAZIONE	16.5 Vdc (FOR 15 MIN.)
	OUTPUT IMPEDANCE AUSGANGSWIDERSTAND IMPEDANCE DU CIRCUIT DE SORTIE IMPEDENZA DI USCITA	10Ω
	CURRENT CONSUMPTION STROMAUFNAHME CONSUMMATION DE COURANT ASSORBIMENTO DI CORRENTE	< 12mA
	TIGHTENING TORQUE ANZUGSMOMENT COUPLE DE SERRAGE COPPIA DI SERRAGGIO	9.8 ±1Nm
	DEGREE OF PROTECTION ACCORDING TO IEC 529 SCHUTZART NACH IEC 529 DEGRE DE PROTECTION SUIVANT IEC 529 GRADO DI PROTEZIONE SECONDO IEC 529	IP 67

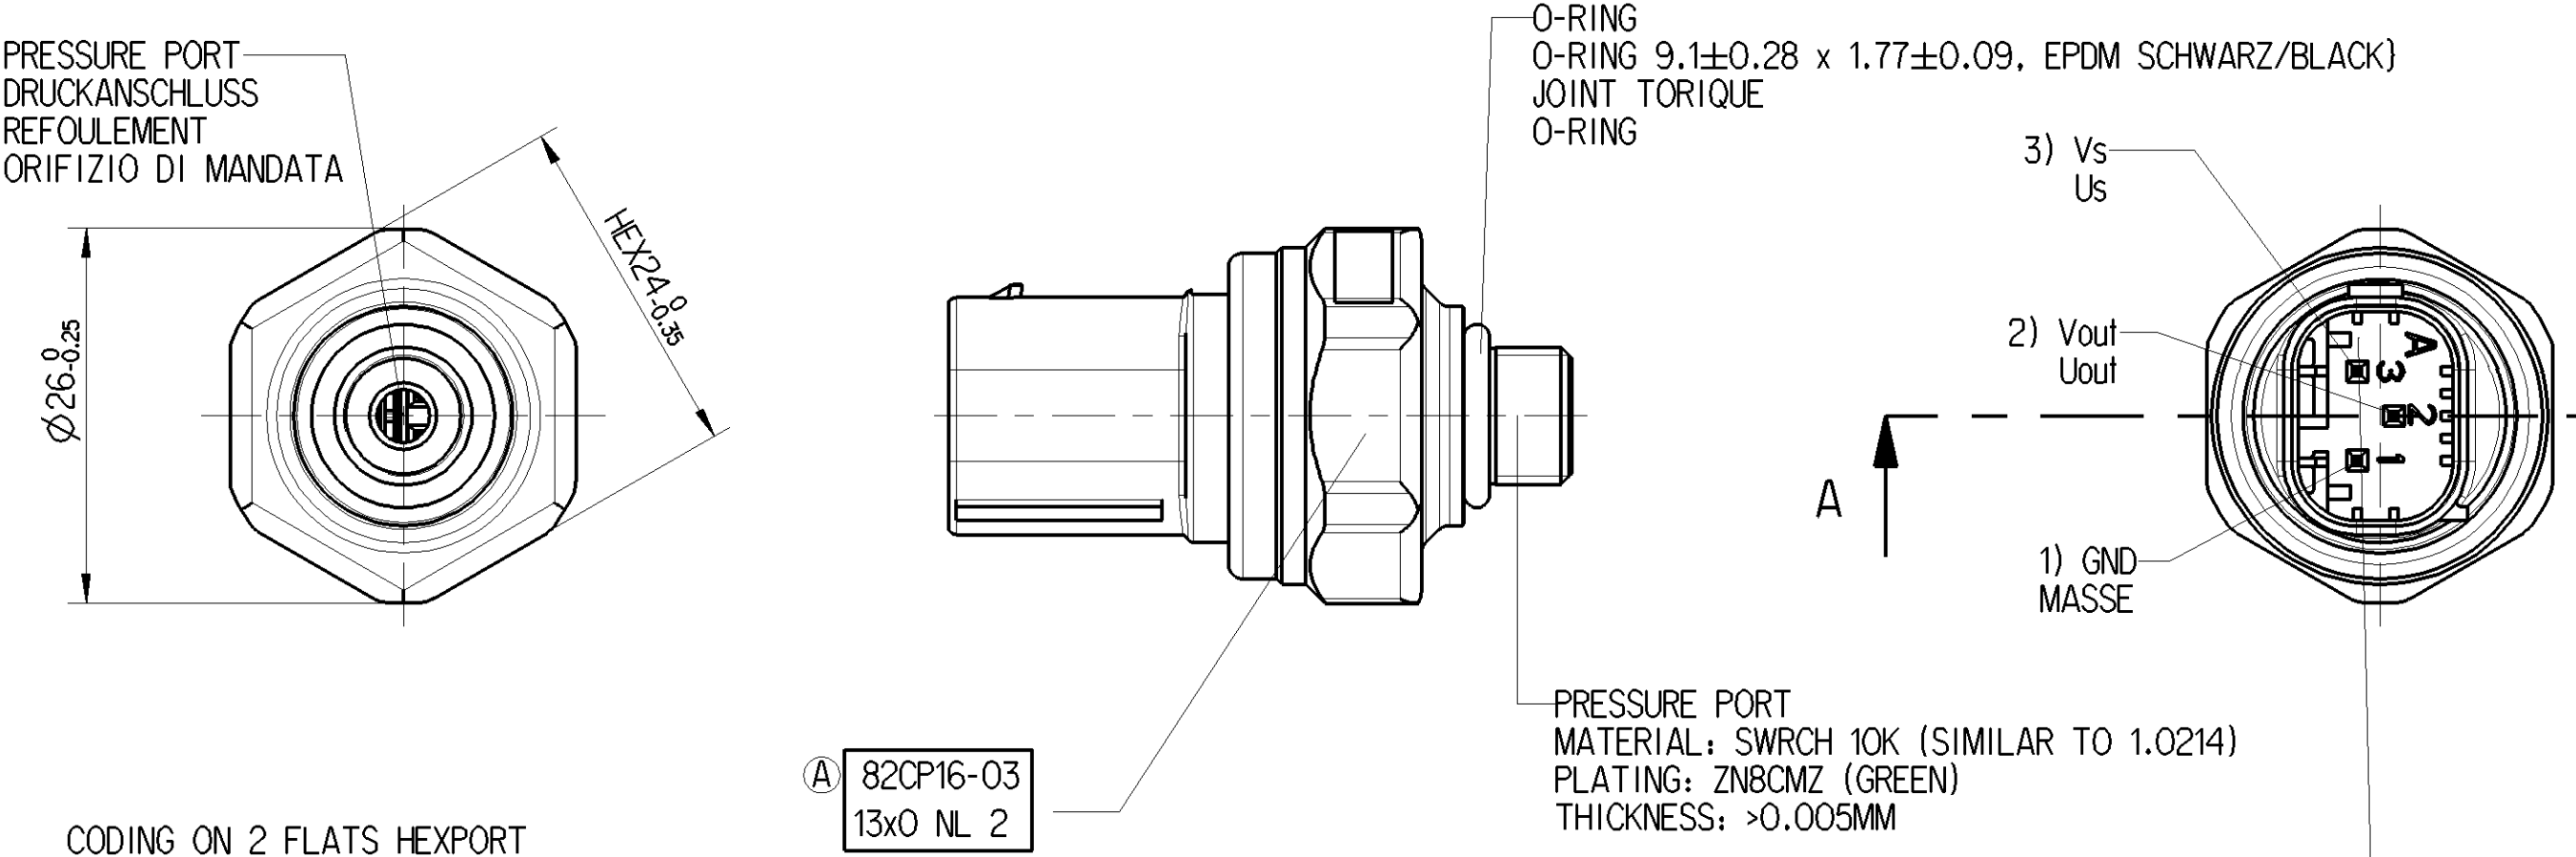

General Specifications: JED-334-1, Size ISO 14405 LP				Copyright WABCO®		WABCO						
Further Technical Data: 441 043 101 0				Date		Signature						
Doc. Code: 535		Sheet: To		Drawn		PRESSURE SENSOR DRUCKSENSOR CAPTEUR DE PRESSION SENSORE DI PRESSIONE						
General Tolerances JED-261				2016-12-08					Markuszewski			
Range of Nominal Dimensions (± mm)				2016-12-12					Grüender			
				Expert								
Class 1)		≤ 50 $> 50 \leq 180$ $> 180 \leq 400$ > 400		$\triangleleft$								
Fine	X	5	1,0	1,5	2,0	Material No. 441 043 104 0						
Medium		1,0	2,0	3,0	4,0				Doc. Code		Language	Sheet
Coarse		2,0	3,5	5,0	6,5				005		ML	1/1
Tapped Holes acc. ISO 4039 / JED-102				Mass		Scale		Date of first issue:				
1) Tolerance Class Applied Crossmarked				0.040		2:1 (1:1,5:1)						
				kg		CAD System						
				Size		A 1		CREO				
						ECH-No. 172519		Revision 1x A				
						Techn. Resp. 6620_FM		Replacement for				