


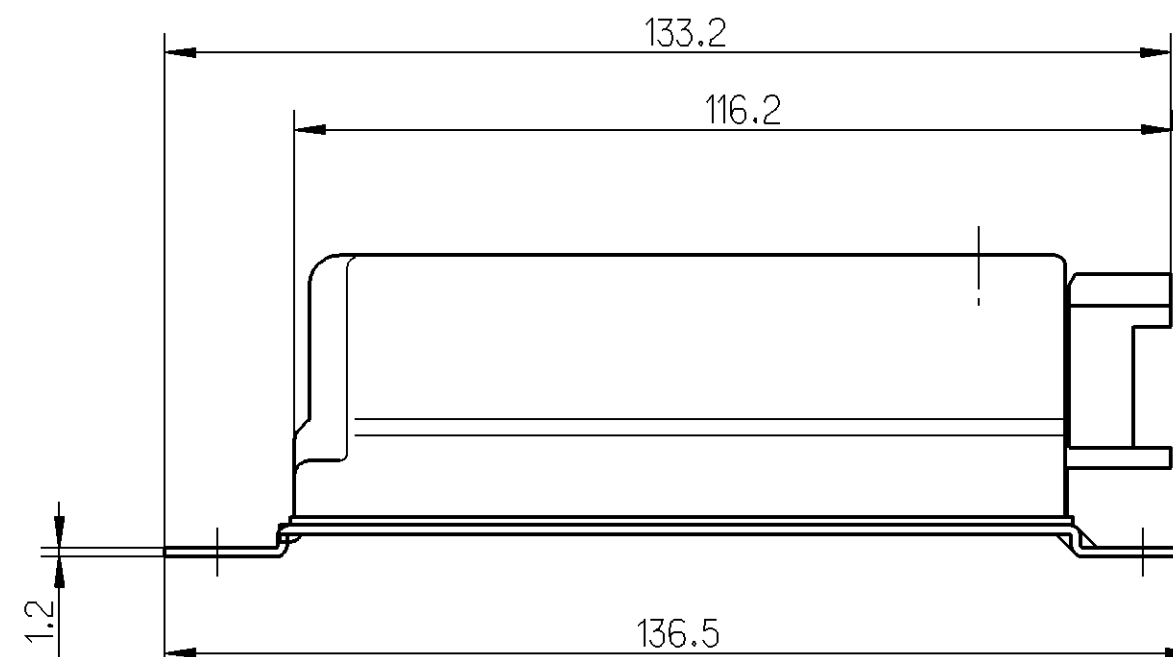


NON-OPERATING TEMPERATURE:
TEMPERATUR AUSSER BETRIEB: -40 °C...+90°C

SERIAL NUMBER GREATER THAN:
FORTSCHRITTZAHL GROSSER ALS: 0


WABCO LABEL / CUSTOMER LABEL:
 CONTENTS SEE DOCUMENT "LABELING INFORMATION" (446 003 714 0 DOC. 922)
 WABCO-KENNZEICHNUNG / KUNDEN- KENNZEICHNUNG:
 INHALT SIEHE DOKUMENT "LABELING INFORMATION" (446 003 714 0 DOC. 922)


FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION

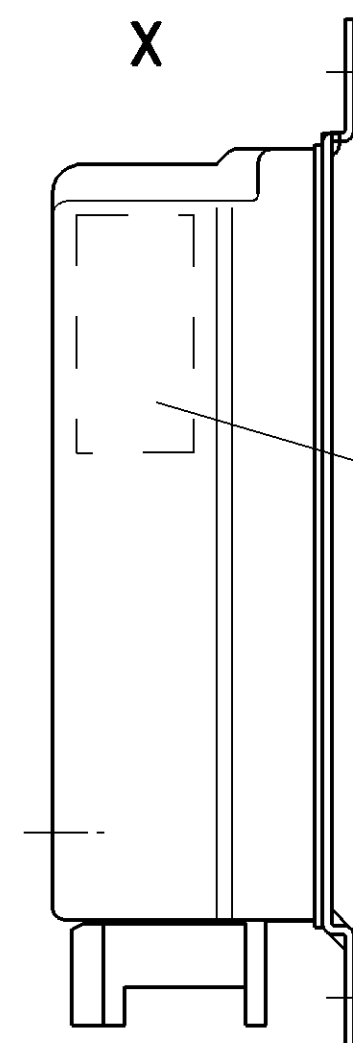

— AREA PROVIDED FOR INTERIM LABEL (FOR WABCO PURPOSE ONLY)
BEREICH FÜR INTERIMSAUFKLEBER (NUR BEI WABCO)

INSTALLATION POSITION:
FINBAU LAGE:

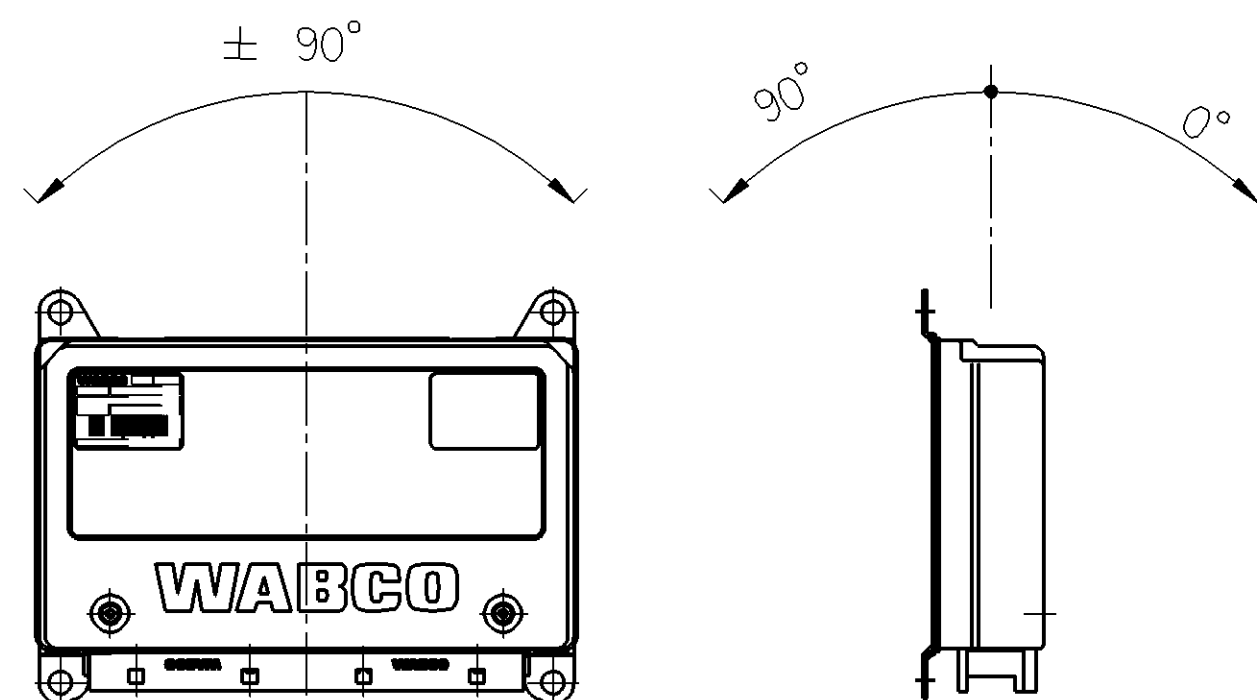

General Specification: JED-334-O						Copyright WABCO®			WABCO ECU ABS-E4 UNIVERSAL ECU 24V 6S/6M				
Further Technical Data:						Date		Signature					
Doc. Code:		Sheet: To				Drawn							
General Tolerances JED-261						2013-09-06		Pfennig					
Class 1)		Range of Nominal Dimensions (± mm) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400 ±3°					Checked						
							2013-09-11		Ohlendorf				
							Expert						
							Ohlendorf						
Fine			0.5	1.0	1.5	2.0	Mass	Scale	Material No.		Date of first issue: 2008-02-29		
Medium		X	1.0	2.0	3.0	4.0	0.6 kg	1:1	446 003 714 0		Doc.Code Language Sheet		
Coarse			2.0	3.5	5.0	6.5	Size	CAD System			005 DE 1/1		
Tapped Holes acc.						A 2		Pro/E		ECN-No.	Revision	Techn. Resp.	Replacement for
1) Tolerance Class Applied Crossmarked										161715	3x D	G300_E	