
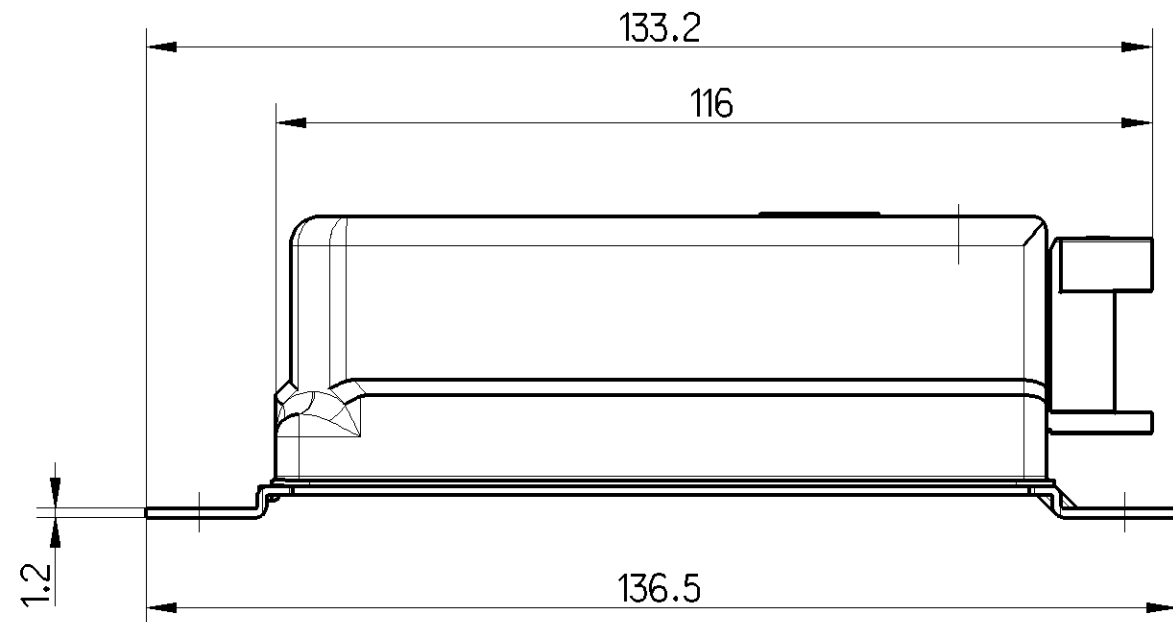


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout montage ou autre regle constitue un abus evident et expose son auteur au versement de dommages et interests. Todos datos de derechos reservados. Reservados todos los derechos de uso, de copia o de distribucion. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli. Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission from WABCO. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout montage ou autre regle constitue un abus evident et expose son auteur au versement de dommages et interests. Todos datos de derechos reservados. Reservados todos los derechos de uso, de copia o de distribucion. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli. Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission from WABCO. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

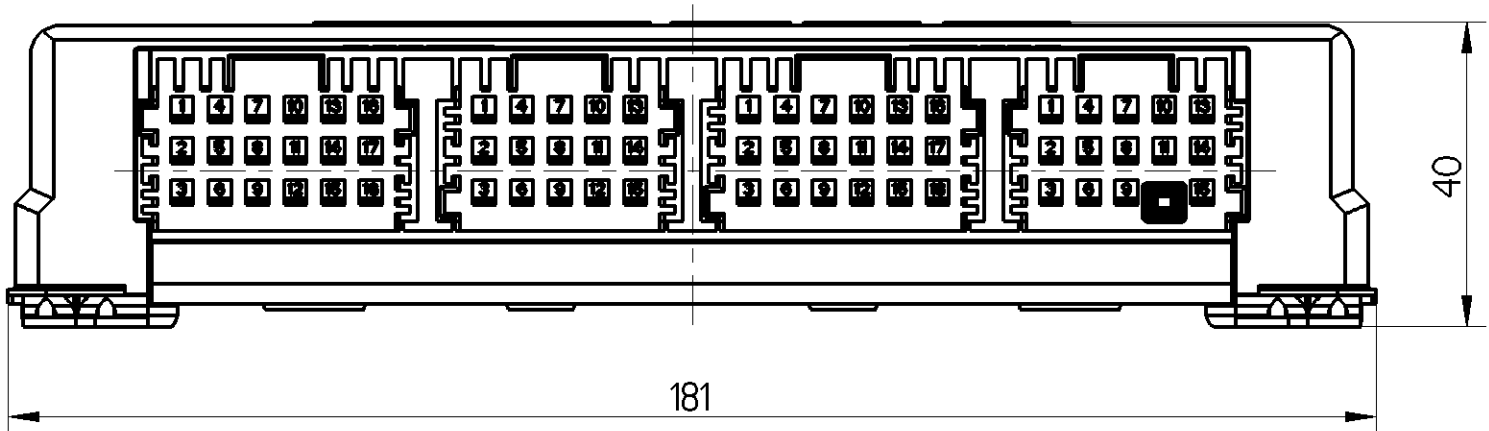

PROTECT TYPE:
SCHUTZART: IP 40 (IEC 529)

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40 °C..+75°C



NON-OPERATING TEMPERATURE:
TEMPERATUR AUSSER BETRIEB: -40 °C..+90°C

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION:
MESSERLEISTE: OBERFLAECHENSCHUTZ: TINNED
VERZINNT

SERIAL NUMBER GREATER THAN: 0
FORTSCHRITZAHN GROESSER ALS: 0


WABCO LABEL / CUSTOMER LABEL:
CONTENTS SEE DOCUMENT "LABELING INFORMATION" (446 003 778 0 DOC. 922)
WABCO-KENNZEICHNUNG / KUNDEN- KENNZEICHNUNG:
INHALT SIEHE DOKUMENT "LABELING INFORMATION" (446 003 778 0 DOC. 922)

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION

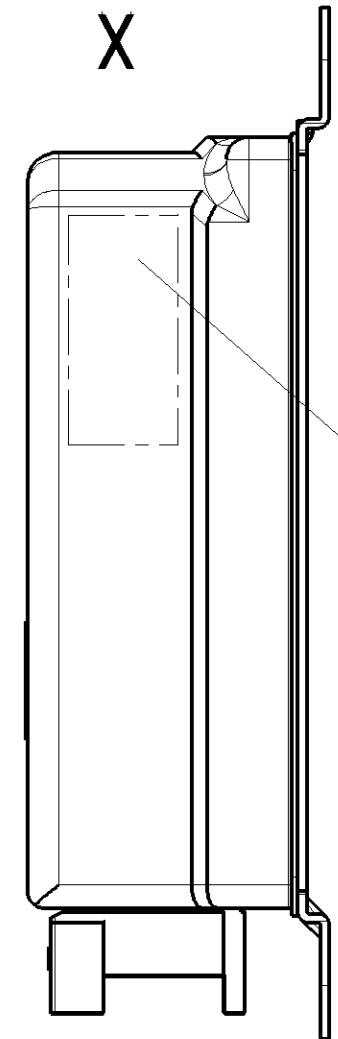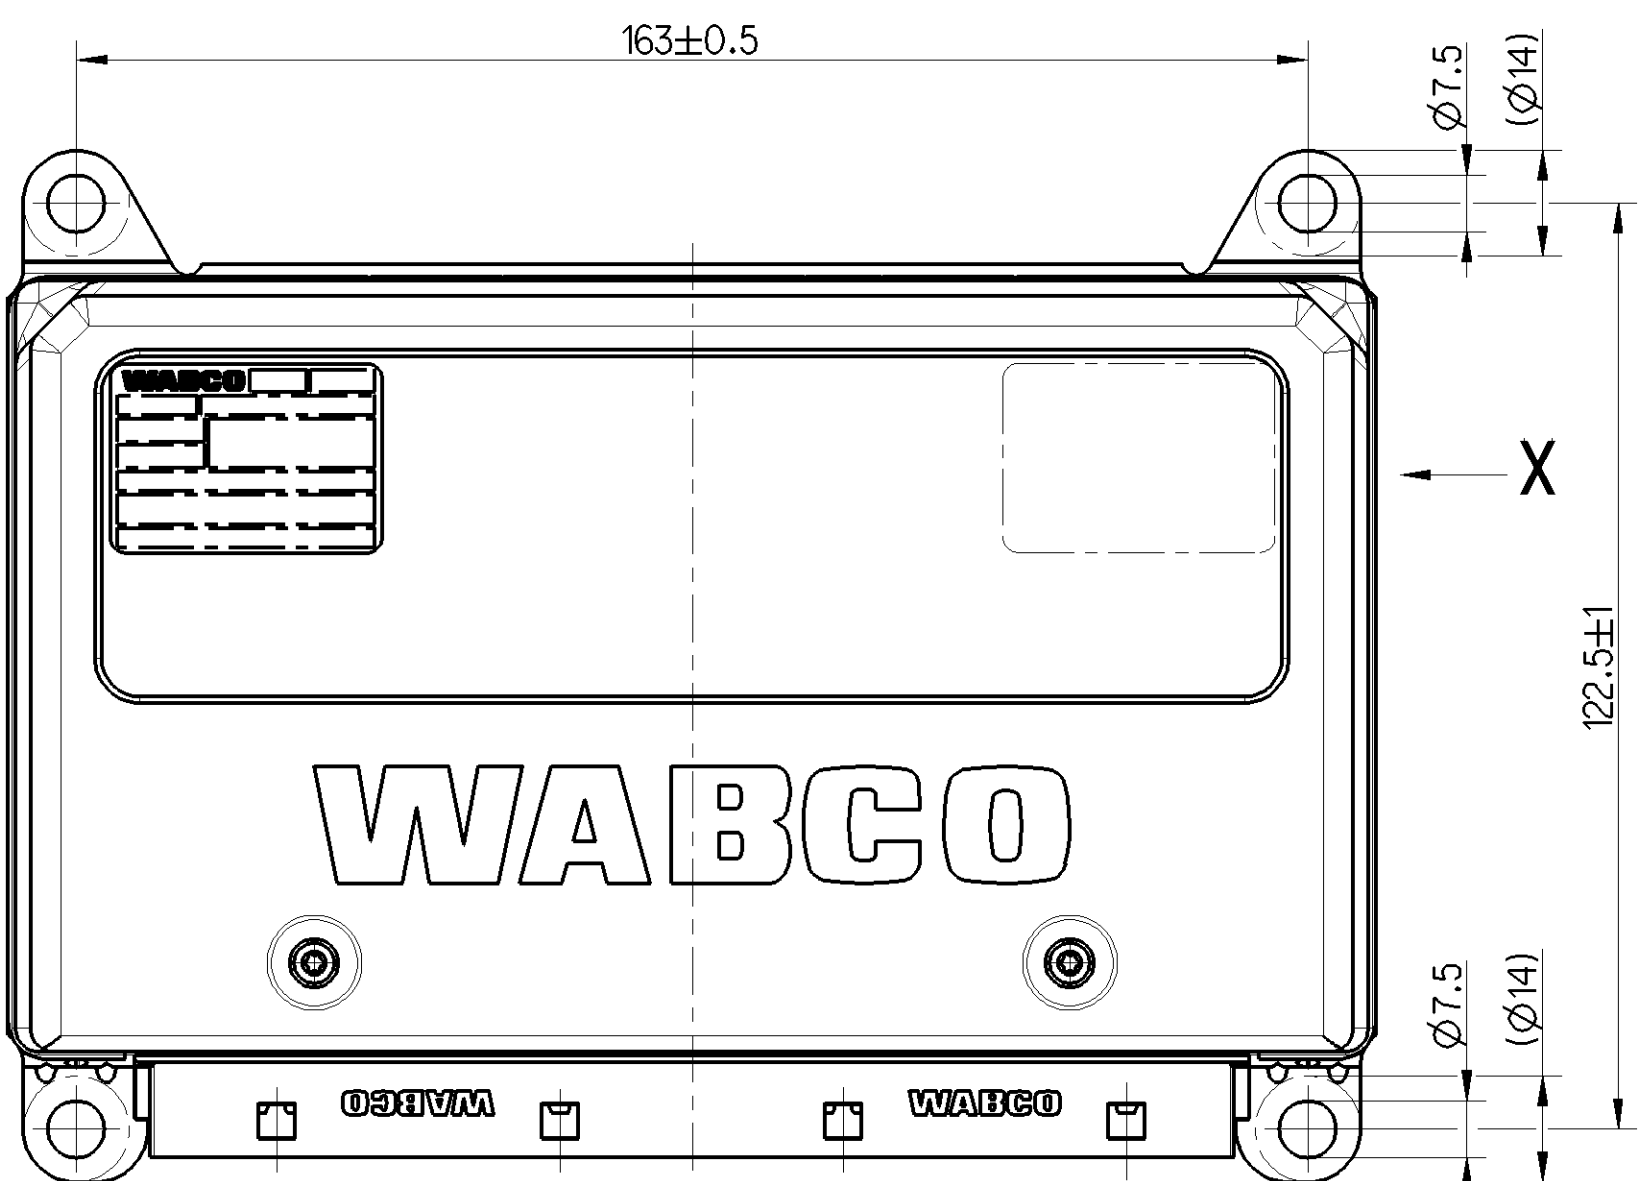

AREA PROVIDED FOR INTERIM LABEL (FOR WABCO PURPOSE ONLY)
BEREICH FUER INTERIMSAUFKLEBER (NUR FUER WABCO)

INSTALLATION POSITION:
EINBAULAGE:

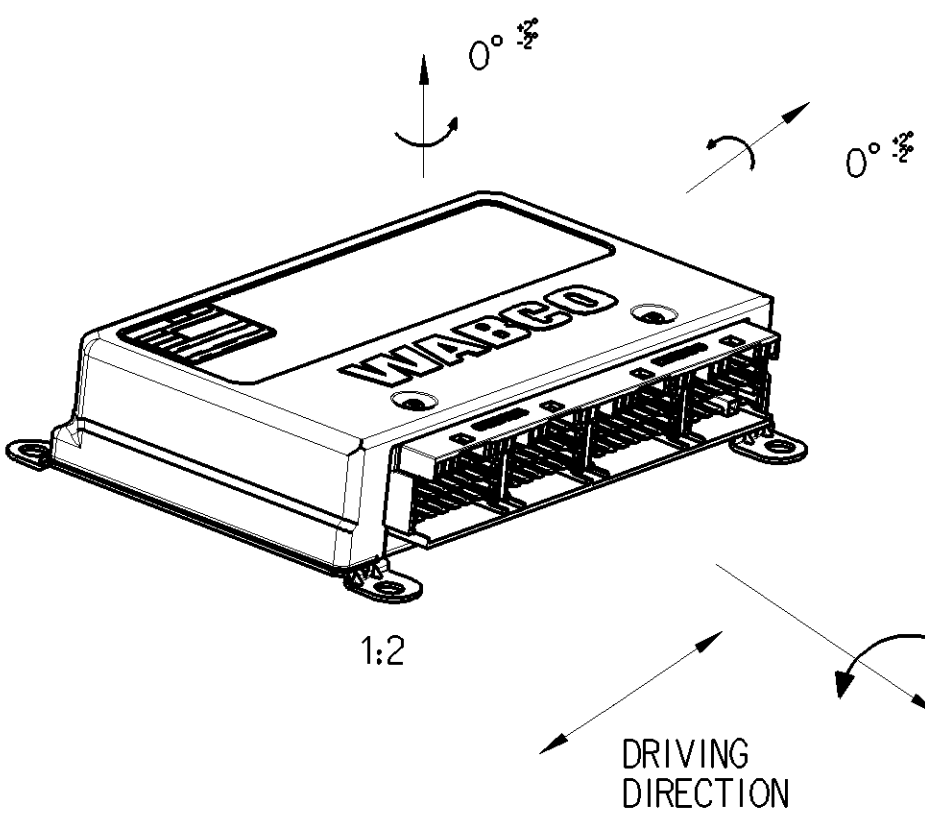

General Specification: JED-334-1, Size ISO 14405 LP										Copyright WABCO®				WABCO ECU ABS E4 UNIVERSAL 12V SAE RSC															
Further Technical Data:										Date		Signature																	
Doc. Code:				Sheet:			To			2014-10-06		Cecol																	
General Tolerances JED-261										Checked																			
Range of Nominal Dimensions (± mm)										2014-10-07				Bork															
<table><tr><td rowspan="2">Class</td><td rowspan="2">1)</td><td rowspan="2">≤ 50</td><td>≤ 180</td><td>> 50</td><td>> 180</td><td>> 400</td><td rowspan="2">±3°</td></tr><tr><td>≤ 180</td><td>≤ 180</td><td>≤ 400</td><td>≤ 400</td></tr></table>										Class	1)	≤ 50	≤ 180	> 50	> 180					> 400	±3°	≤ 180	≤ 180	≤ 400	≤ 400	Expert			
													Class	1)	≤ 50					≤ 180		> 50	> 180	> 400	±3°				
≤ 180	≤ 180	≤ 400	≤ 400																										
										BORK																			
Fine										Mass		Scale		Material No.				Date of first issue: 2014-10-07											
Medium										0.6 KG		1:1 (1:2)		446 003 778 0				Doc.Code		Language		Sheet							
Coarse										Size		CAD System						005		DE		1/1							
Tapped Holes acc.										A 2		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for							
1) Tolerance Class Applied Crossmarked														-		-		-		6300									