
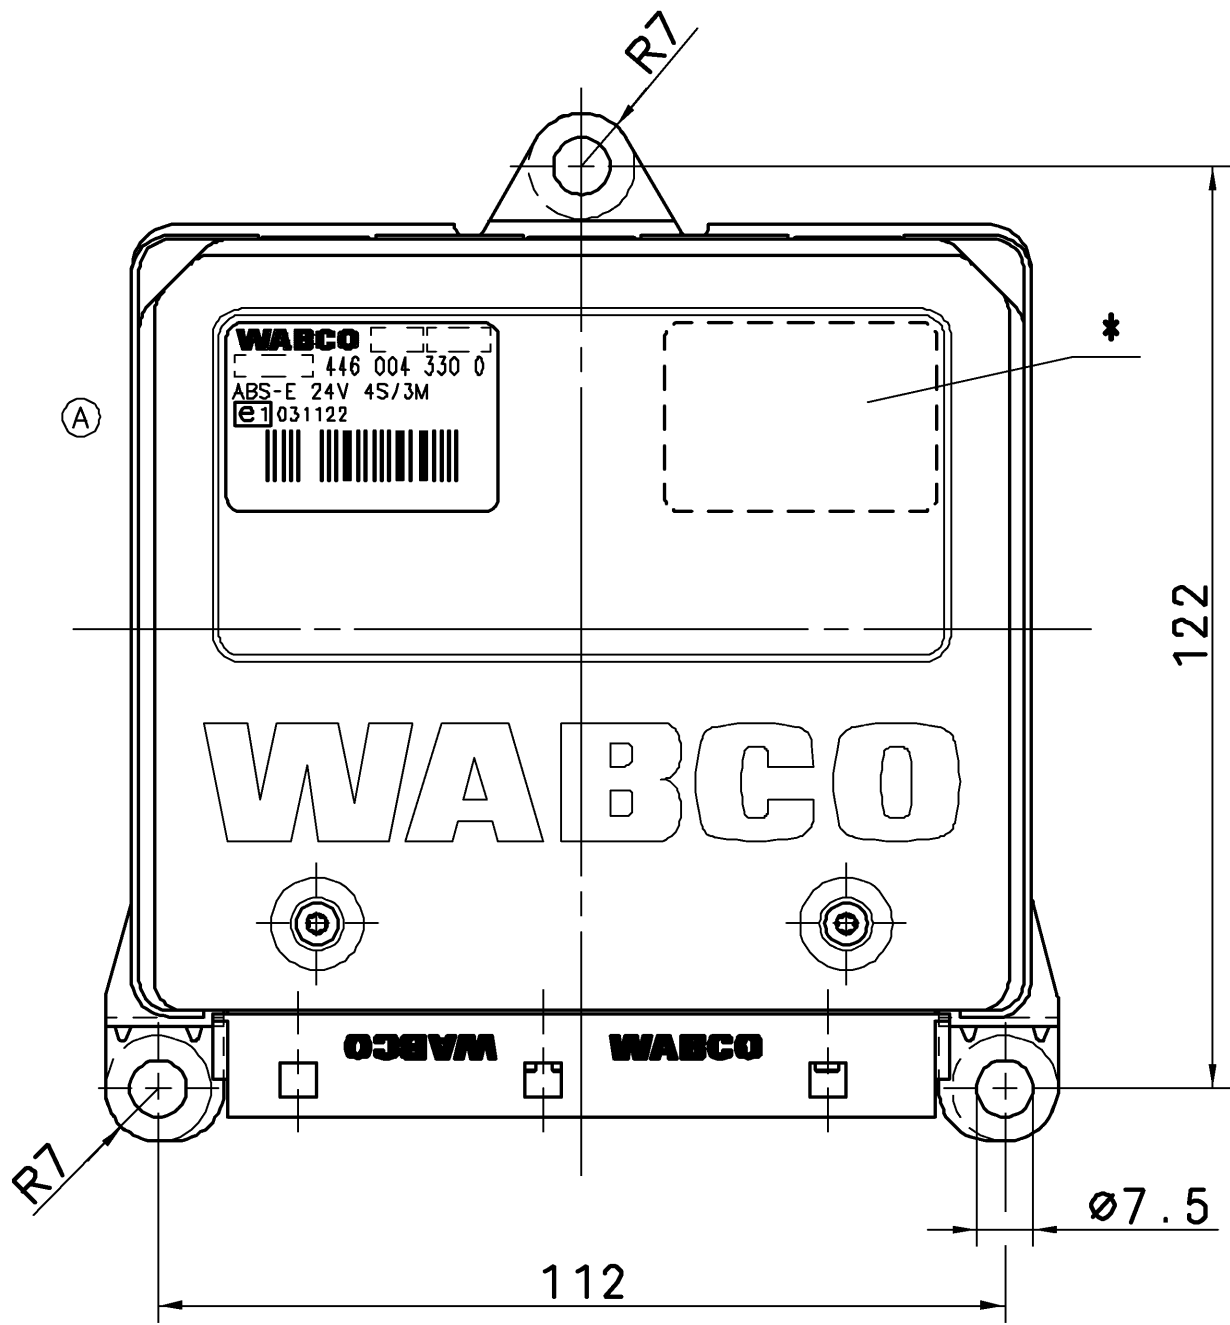
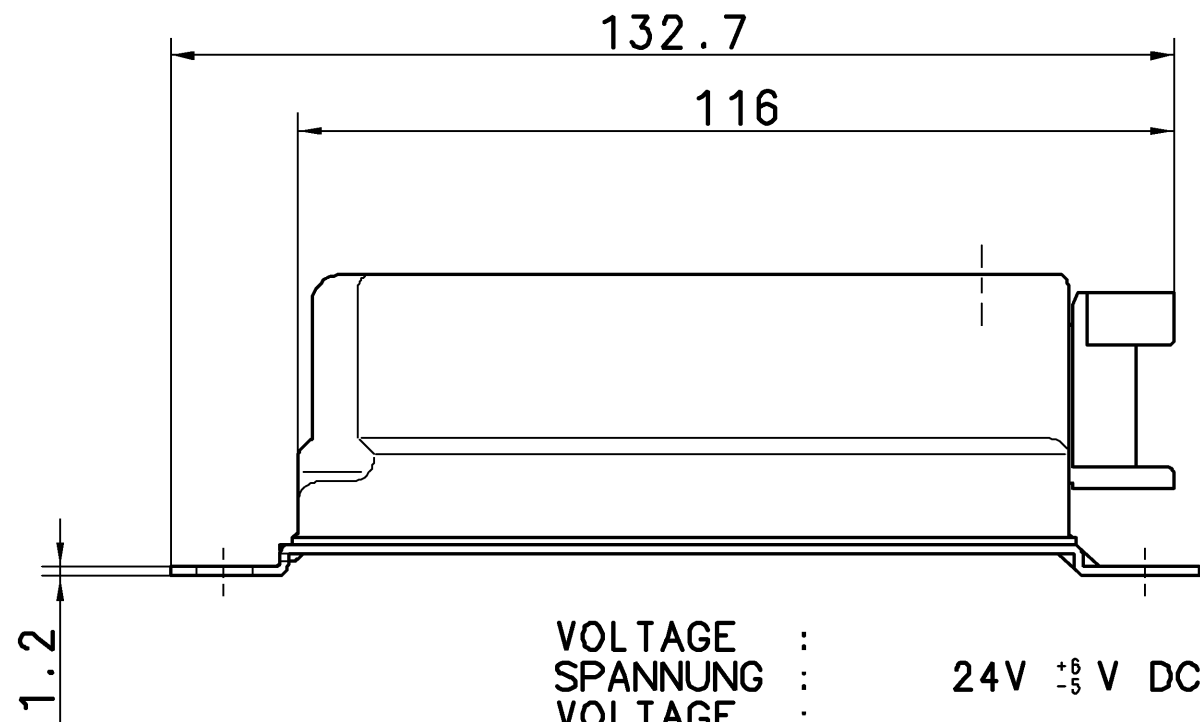


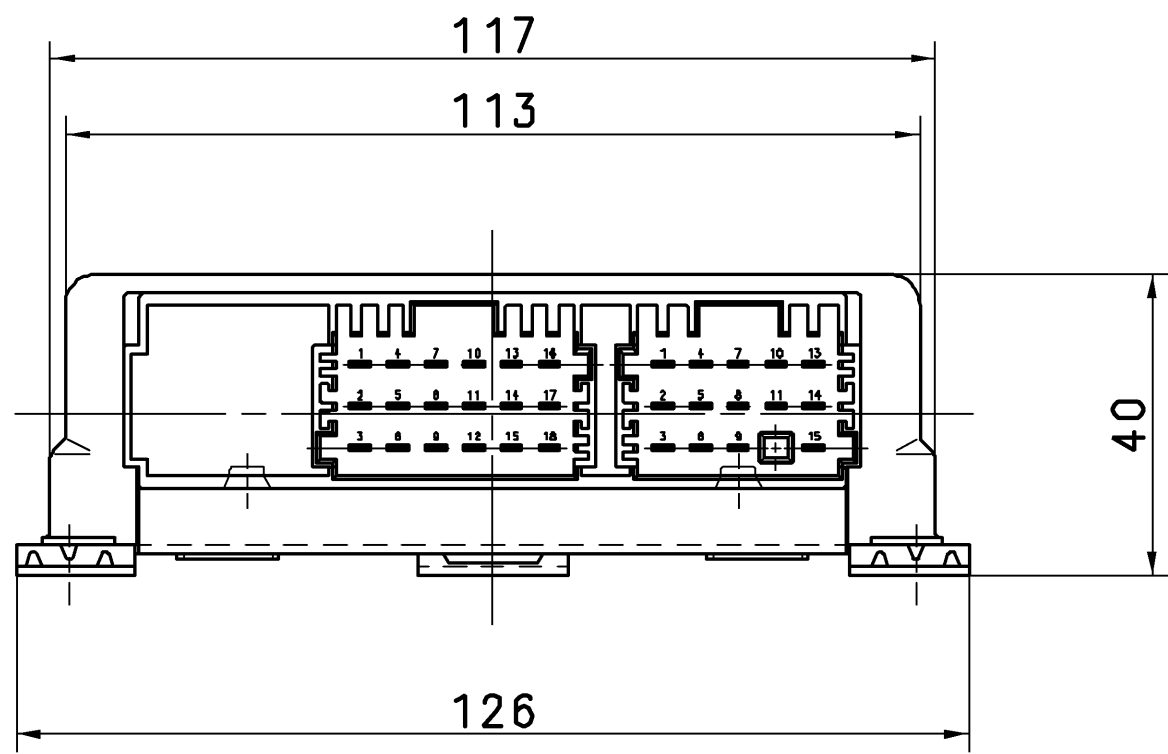

VOLTAGE :
SPANNUNG : 24V $\pm \frac{6}{5}$ V DC
VOLTAGE :
VOLTAGGIO :

PROTECT TYPE :
SCHUTZART : IP 30 (IEC 529)
MODE DE PROTECTION :
MODO DI PROTEZIONE :


THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+75°C
GAMME D' APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

NON-OPERATING TEMPERATURE :
TEMPERATUR AUSSER BETRIEB : -40°C...+100°C
TEMPERATURE HORS FONCTIONNEMENT :
TEMPERATURA FUORI ESERCIZIO :

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION : TINNED
MESSERLEISTE: OBERFLAECHENSCHUTZ : VERZINNT
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE : ETAME
SPINE MULTIPA: PROTEZIONE SUPERFICIALE : STAGNATO

CUSTOMER LABEL : OPTIONAL
* KUNDENAUFKLEBER : BELIEBIG
ETIQUETTE ADHESIVE DU CLIENT : A VOLONTE
ETICHETTA ADESIVA DEL CLIENTE : A SCELTA

INSTALLATION POSITION :
EINBAULAGE :
POSITION D' INSTALLATION :
POSIZIONI DI MONTAGGIO :

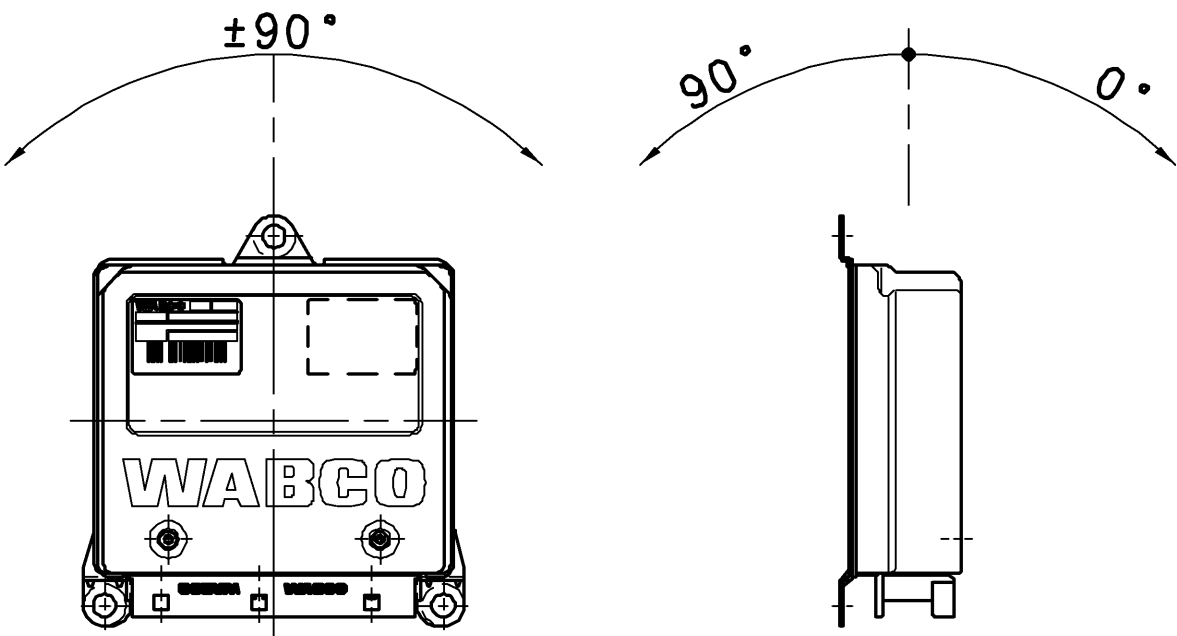

General Specification: JED-334-0					Copyright WABCO®		WABCO						
Further Technical Data:					Date		Signature		ELECTRONIC ELEKTRONIK ELECTRONIQUE ELETTRONICA ABS-E BASIC 4S/3M 24V				
Doc. Code:		Sheet:			To		Drawn						
General Tolerances JED-261					08-10-17			PFENNIG					
Range of Nominal Dimensions (± mm)					08-10-17			GOERS					
					Esperl								
					OHLENDORF								
					Mass		Scale		Material No.				
					0.387		1:1		Date of first issue: 00-06-19				
Fine					KG				Doc.Code				
Medium					Size		CAD System		Language				
Coarse					A 2		CCD		Sheet				
Tapped Holes acc.					CAD System		EON-No.		Revision		Techn. Resp.		
1) Tolerance Class Applied Crossmarked					A 2		118567		A		6300_E		
					Replacement for								