
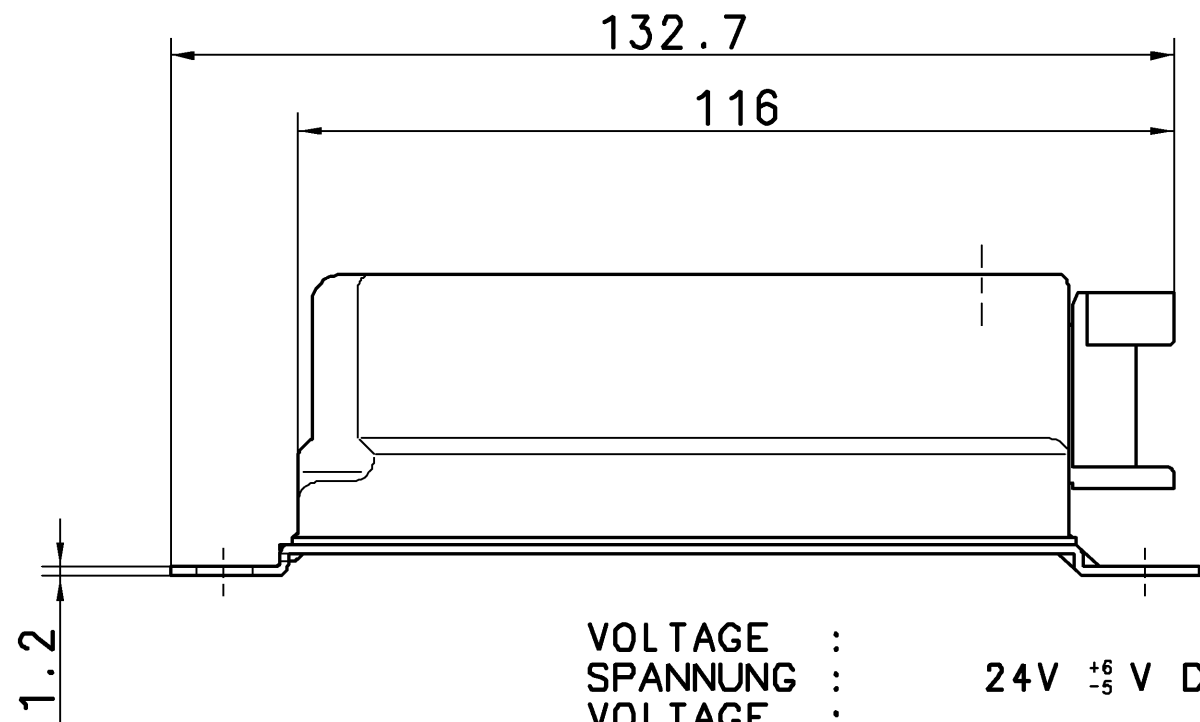


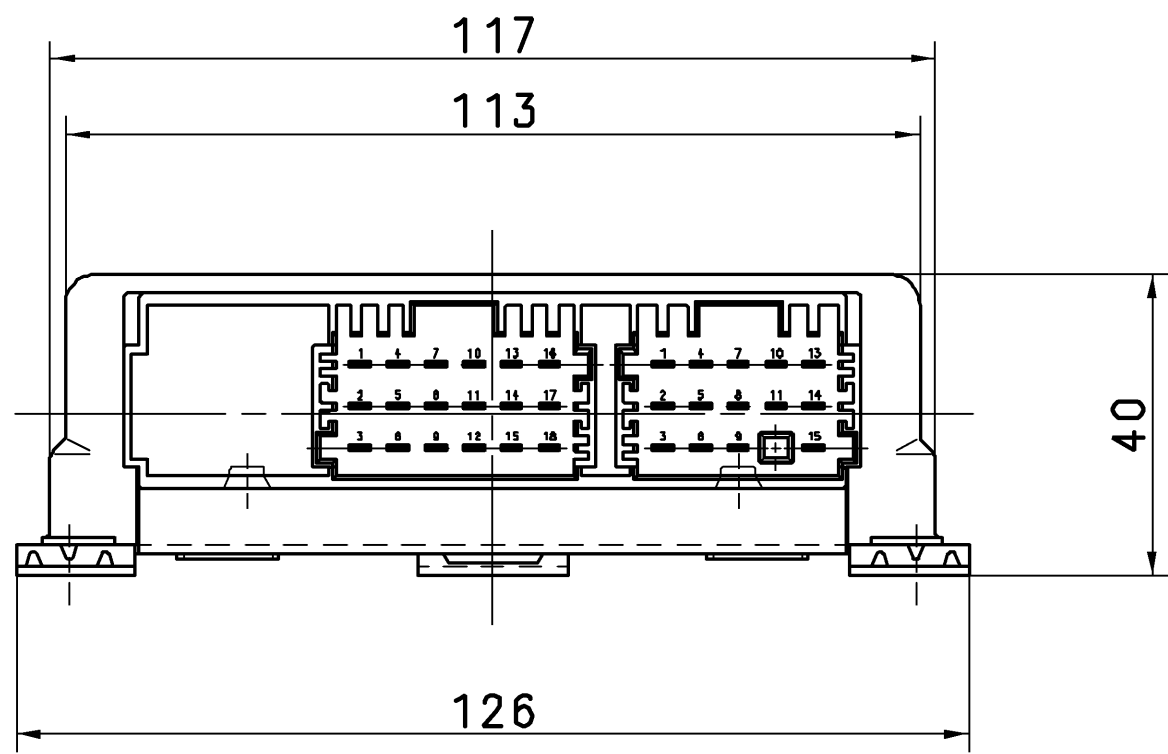

VOLTAGE :
SPANNUNG : 24V ± 5 V DC
VOLTAGE :
VOLTAGGIO :



PROTECT TYPE :
SCHUTZART : IP 30 (IEC 529)
MODE DE PROTECTION :
MODO DI PROTEZIONE :

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+75°C
GAMME D' APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

NON-OPERATING TEMPERATURE :
TEMPERATUR AUSSER BETRIEB : -40°C...+100°C
TEMPERATURE HORS FONCTIONNEMENT :
TEMPERATURA FUORI ESERCIZIO :

MALE MULTIPPOINT CONNECTOR: SURFACE PROTECTION : TINNED
MESSERLEISTE: OBERFLAECHENSCHUTZ : VERZINNT
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE : ETAME
SPINE MULTIPA: PROTEZIONE SUPERFICIALE : STAGNATO

CUSTOMER LABEL : OPTIONAL
KUNDENAUFKLEBER : BELIEBIG
ETIQUETTE ADHESIVE DU CLIENT : A VOLONTE
ETICHETTA ADESIVA DEL CLIENTE : A SCELTA

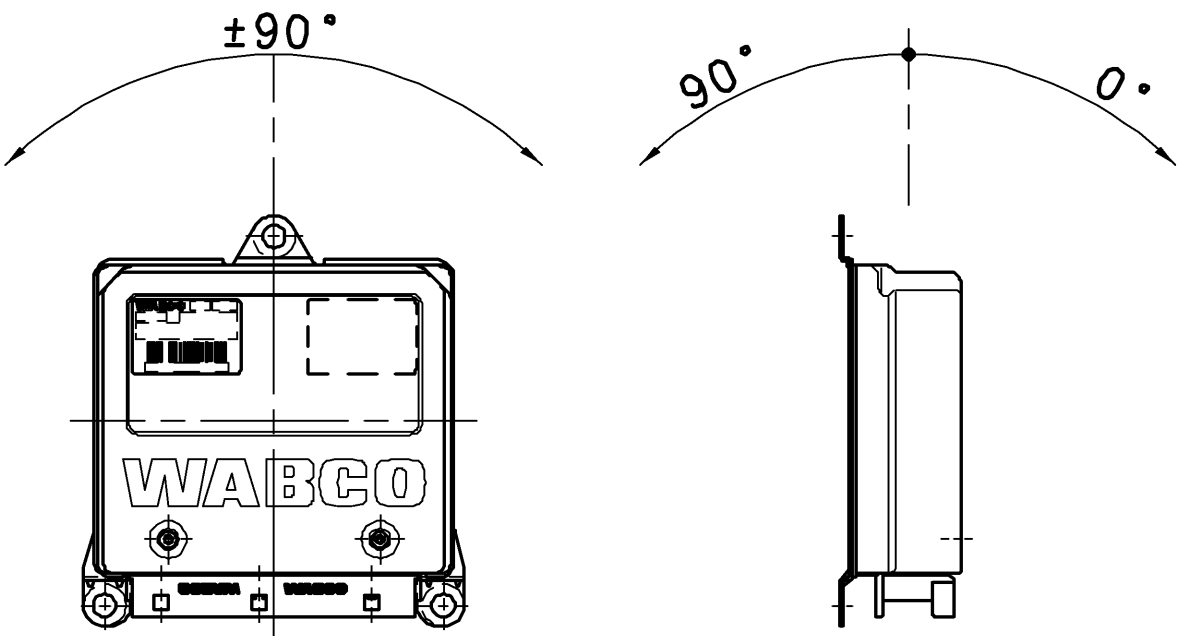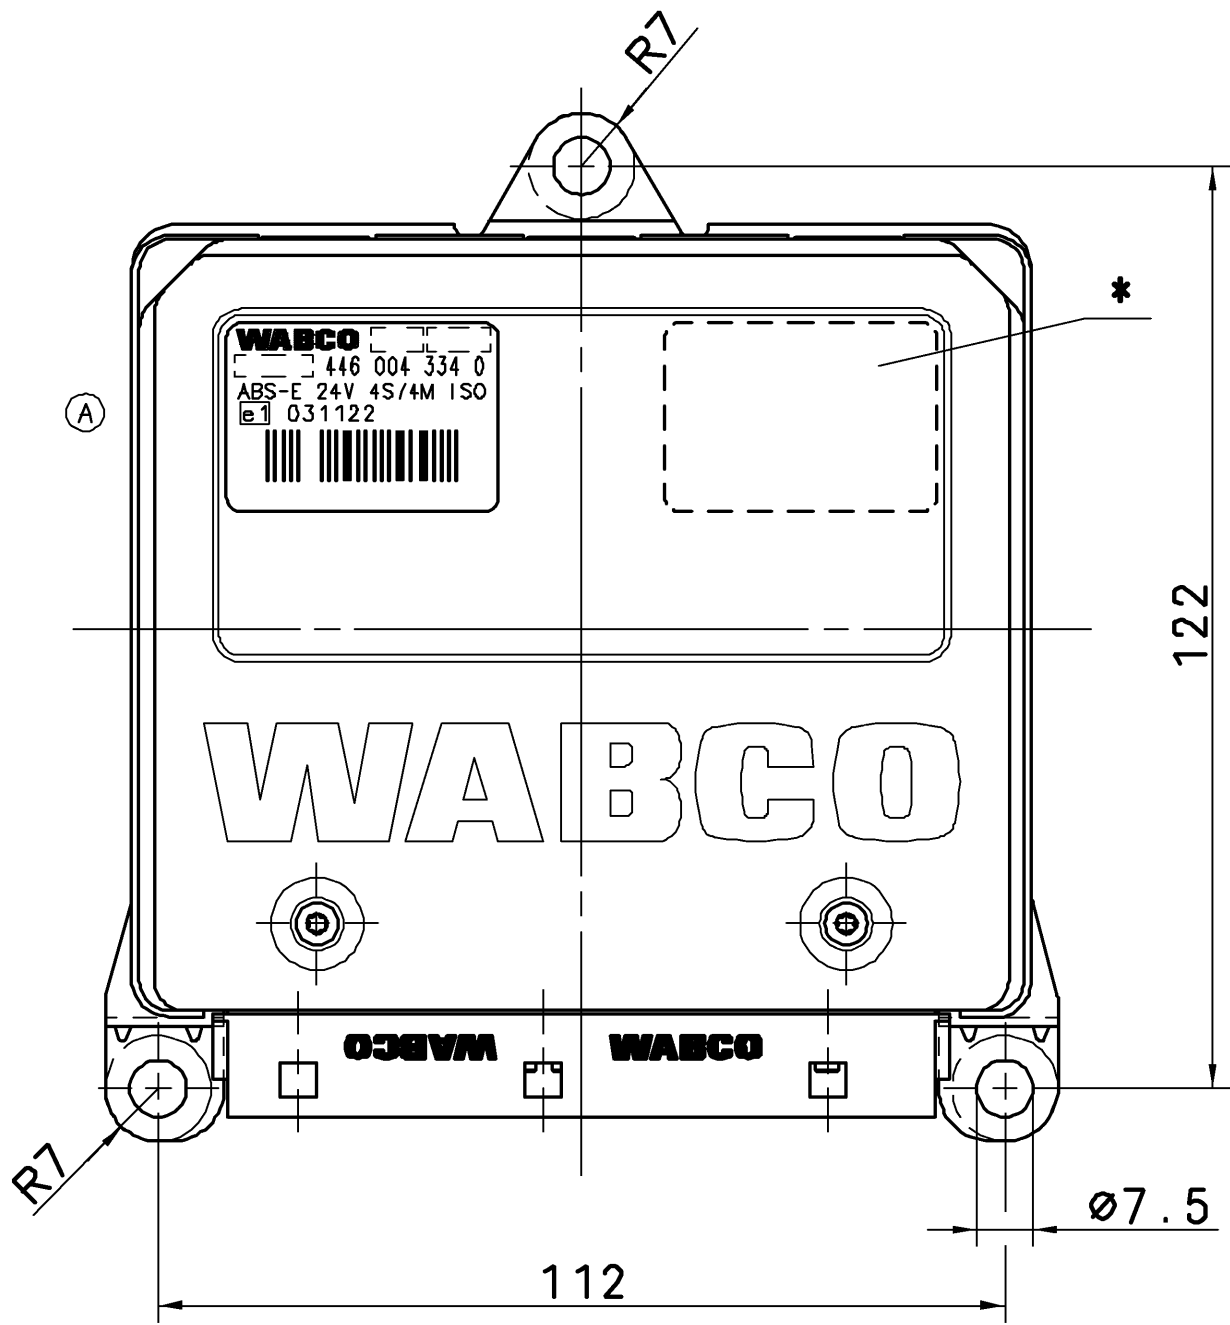

INSTALLATION POSITION :
EINBAULAGE :
POSITION D' INSTALLATION :
POSIZIONI DI MONTAGGIO :

General Specification: JED-334-0					Copyright WABCO®		WABCO ELECTRONIC ELEKTRONIK ELECTRONIQUE ELETTRONICA ABS-E BASIC 24V 4S/4M-Q																																
Further Technical Data:					Date _____ Signature _____																																		
Doc. Code:		Sheet: _____ To _____			Drawn _____																																		
General Tolerances JED-261					08-12-09 PFENNIG																																		
<table><tr><td colspan="2"></td><td colspan="4">Range of Nominal Dimensions (± mm)</td><td rowspan="4"> ±3° </td></tr><tr><td>Class 1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td></tr><tr><td>Fine</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td><td></td></tr></table>							Range of Nominal Dimensions (± mm)				±3°	Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Fine	0.5	1.0	1.5	2.0	Medium	1.0	2.0	3.0	4.0	Coarse	2.0	3.5	5.0	6.5		08-12-09 GOERS						
							Range of Nominal Dimensions (± mm)					±3°																											
					Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																														
					Fine	0.5	1.0	1.5	2.0																														
Medium	1.0	2.0	3.0	4.0																																			
Coarse	2.0	3.5	5.0	6.5																																			
					Esperl _____																																		
					OHLENDORF _____																																		
<table><tr><td colspan="2">Tapped Holes acc.</td></tr><tr><td>1) Tolerance Class Applied Crossmarked</td></tr></table>					Tapped Holes acc.		1) Tolerance Class Applied Crossmarked	Mass _____ Scale _____		Material No.			Date of first issue: 03-07-09																										
					Tapped Holes acc.																																		
					1) Tolerance Class Applied Crossmarked																																		
					0.508 KG		1 : 1		446 004 334 0			Doc.Code _____ Language _____ Sheet _____																											
Size _____ CAD System _____				005 ML 1/1																																			
					A 2 CCD 		ECN-No. _____ Revision _____ Techn. Resp. _____		Replacement for _____																														
							119478 A 6300_E																																