
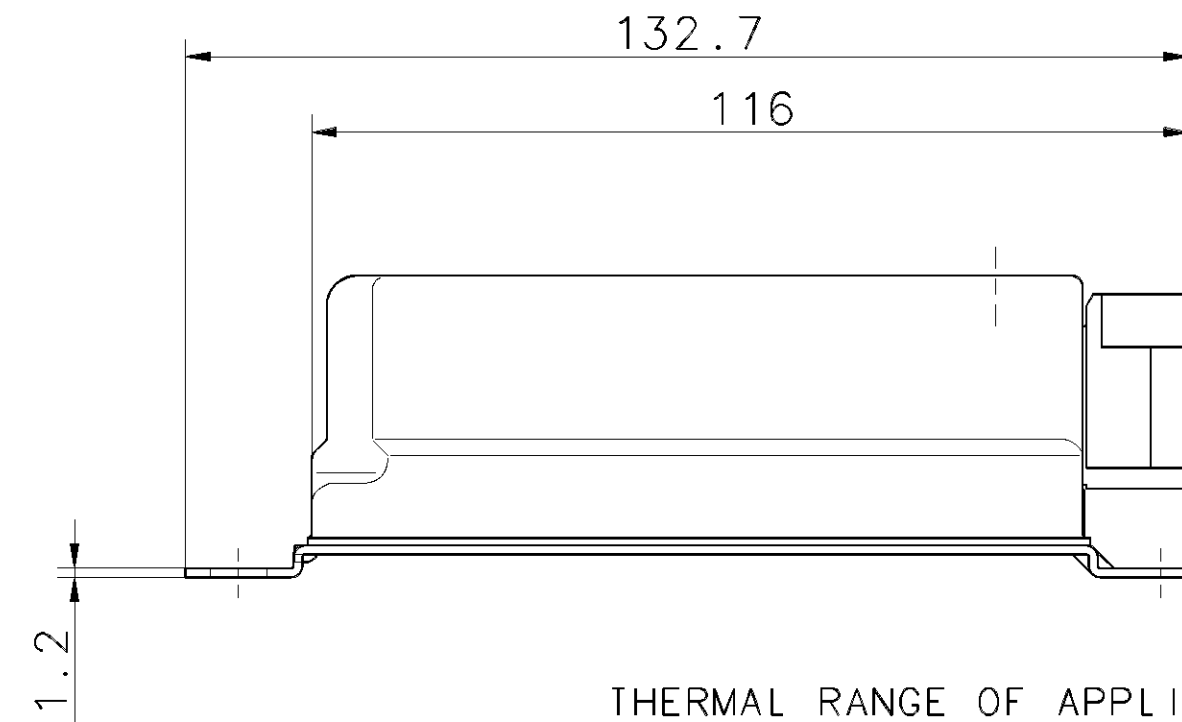


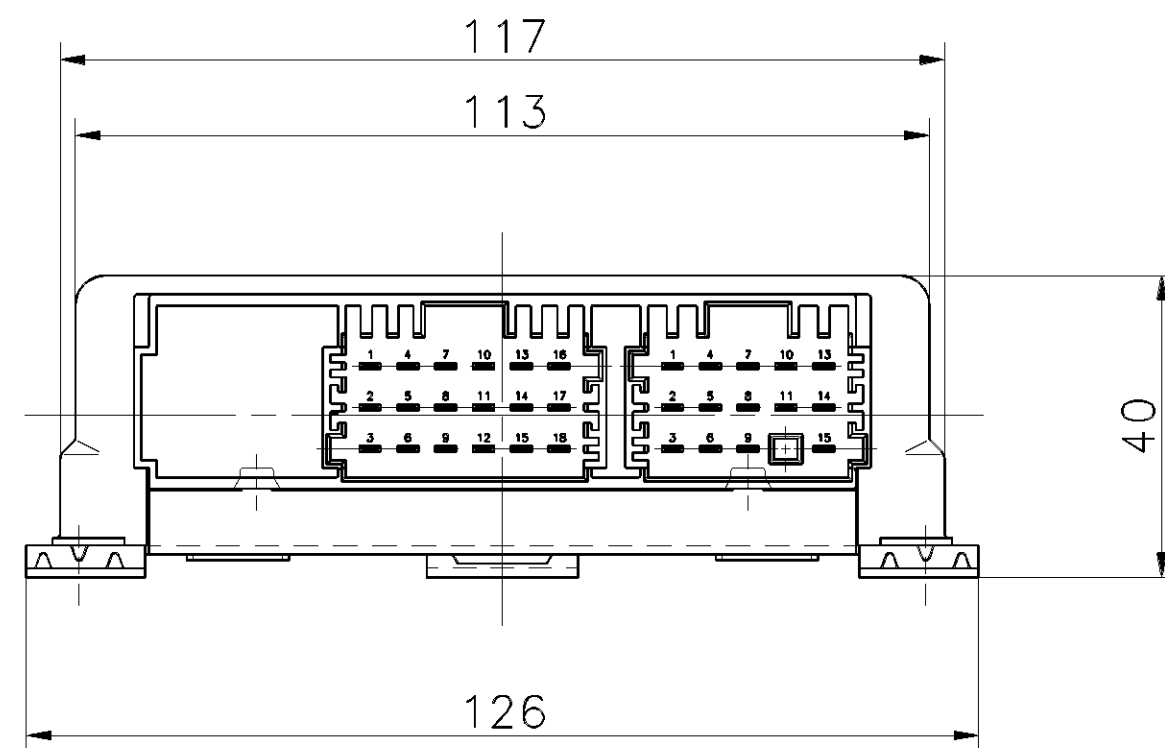

```
VOLTAGE      :
SPANNUNG     :      12V ±25% DC   * * *
VOLTAGE      :
VOLTAGGIO    :
```

```
PROTECT TYPE      :  
SCHUTZART        :      IP 30 (IEC 529)  
MODE DE PROTECTION:  
MODO DI PROTEZIONE:
```

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+75°C
GAMME D' APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

```

STORING TEMPERATURE      :
LAGERTEMPERATUR          :      -40°C...+90°C  * * *
TEMPERATURE D' UTILISATION:
TEMPERATURA DI ESERCIZIO :

```

MALE MULTIPPOINT CONNECTOR: SURFACE PROTECTION	:	TINNED
MESSERLEISTE: OBERFLAECHENSCHUTZ	:	VERZINNT
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE	:	ETAME
SPINE MULTIPA: PROTEZIONE SUPERFICIALE	:	STAGNATO



CUSTOMER LABEL	:	OPTIONAL
* KUNDENAUFKLEBER	:	BELIEBIG
ETIQUETTE ADHESIVE DU CLIENT	:	A VOLONTE
ETICHETTA ADESIVA DEL CLIENTE	:	A SCELTA

```

SERIAL NUMBER GREATER THAN      :
* * FORTSCHRITZAHL GROESSER ALS : 0
NUMERO DE SERIE PLUS GRAND QUE:
NUMERO DI SERIE PIU GRANDE DI :

```

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
* * * WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
POUR INFORMATION COMPLEMENTAIRES VOIR LES SPECIFICATIONS DU PRODUIT
PER INFORMAZIONI ULTERIORI VEDI LA SPECIFICAZIONE DEL PRODOTTO

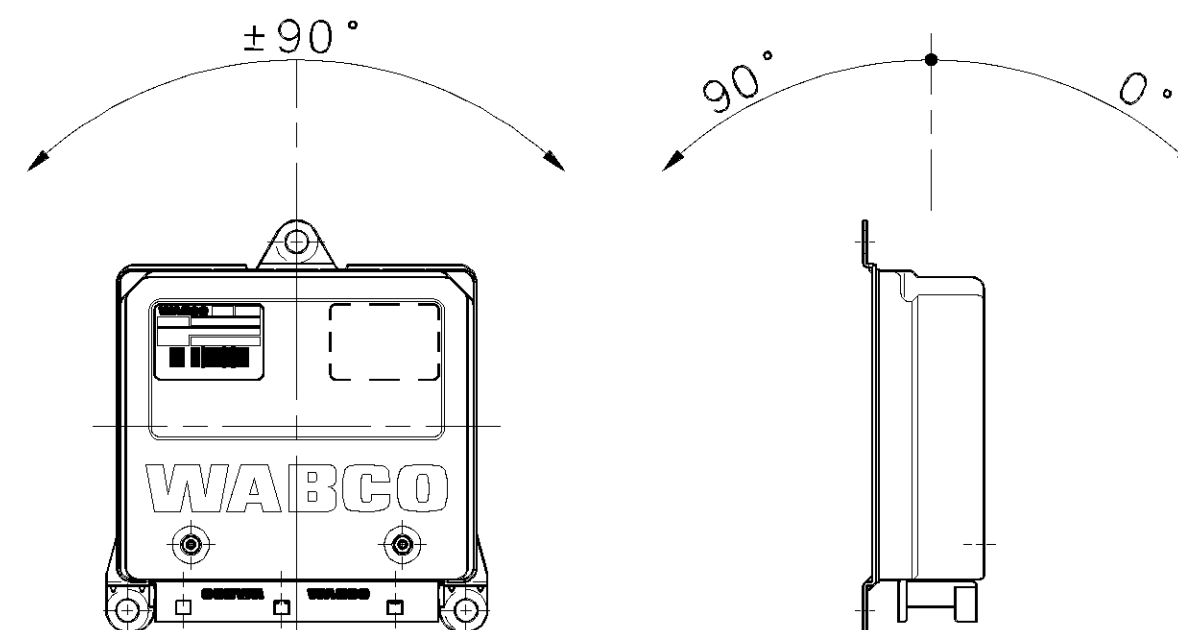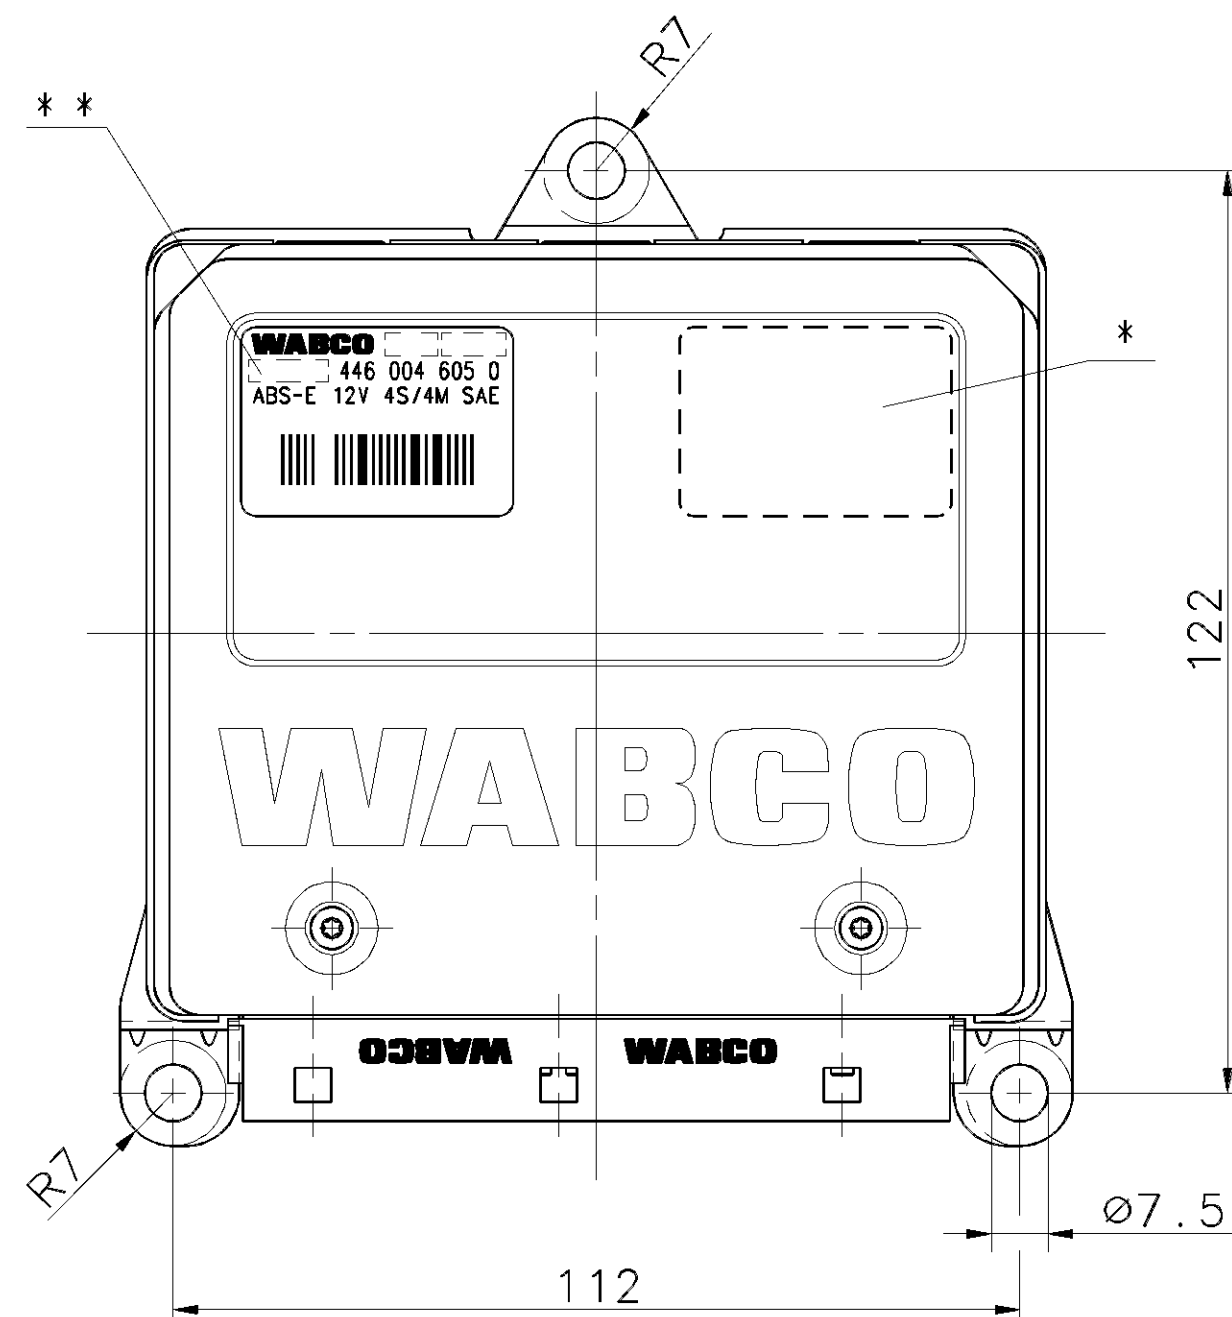

INSTALLATION POSITION :
EINBAULAGE :
POSITION D' INSTALLATION :
POSIZIONI DI MONTAGGIO :

GENERAL SPECIFICATION:				JED-334				CADAM-DRAWING COPYRIGHT				WABCO																																							
FURTHER TECHNICAL DATA:								DATE								SIGNATURE																																			
DOC. CODE:				SHEET:				TO				DRAWN:																																							
GENERAL TOLERANCES								01-04-23				PFENNIG																																							
<table><tr><td colspan="2"></td><td colspan="4">RANGE OF NOMINAL DIMENSIONS (± mm)</td><td colspan="2"></td></tr><tr><td>CLASS</td><td>1)</td><td>≤50</td><td>> 50 ≤180</td><td>>180 ≤400</td><td>>400</td><td colspan="2"></td></tr><tr><td>FINE</td><td>☒</td><td>0,5</td><td>1,0</td><td>1,5</td><td>2,0</td><td colspan="2" rowspan="3">± 3°</td></tr><tr><td>MEDIUM</td><td>☐</td><td>1,0</td><td>2,0</td><td>3,0</td><td>4,0</td></tr><tr><td>COARSE</td><td>☐</td><td>2,0</td><td>3,5</td><td>5,0</td><td>6,5</td></tr></table>										RANGE OF NOMINAL DIMENSIONS (± mm)						CLASS	1)	≤50	> 50 ≤180	>180 ≤400	>400			FINE	☒	0,5	1,0	1,5	2,0	± 3°		MEDIUM	☐	1,0	2,0	3,0	4,0	COARSE	☐	2,0	3,5	5,0	6,5	CHECKED:				01-04-23			
										RANGE OF NOMINAL DIMENSIONS (± mm)																																									
								CLASS	1)	≤50	> 50 ≤180	>180 ≤400	>400																																						
								FINE	☒	0,5	1,0	1,5	2,0	± 3°																																					
								MEDIUM	☐	1,0	2,0	3,0	4,0																																						
COARSE	☐	2,0	3,5	5,0	6,5																																														
								OHLENDORF RI.				ELECTRONIC ELEKTRONIK ELECTRONIQUE ELECTRONICA																																							
								STANDARDIZATION:				ABS-E BASIC 4S/4M 12V																																							
TAPPED HOLES ACC. ISO 4039 / JED-152								MASS				SCALE		PRODUCT IDENTIFICATION NO.																																					
1) TOLERANCE CLASS APPLIED CROSSMARKED								0.4 KG		1:1		446 004 605 0				DOC. CODE		SHEET																																	
								SIZE		I.R.I.						605		1/1																																	
								A 2		142						SHAPE CODE		REPLACEMENT FOR																																	
								DCN-NO.		REV.		DATE		EXPERT CODE				PRODUCT TYPE																																	
5												100mm		797																																					