
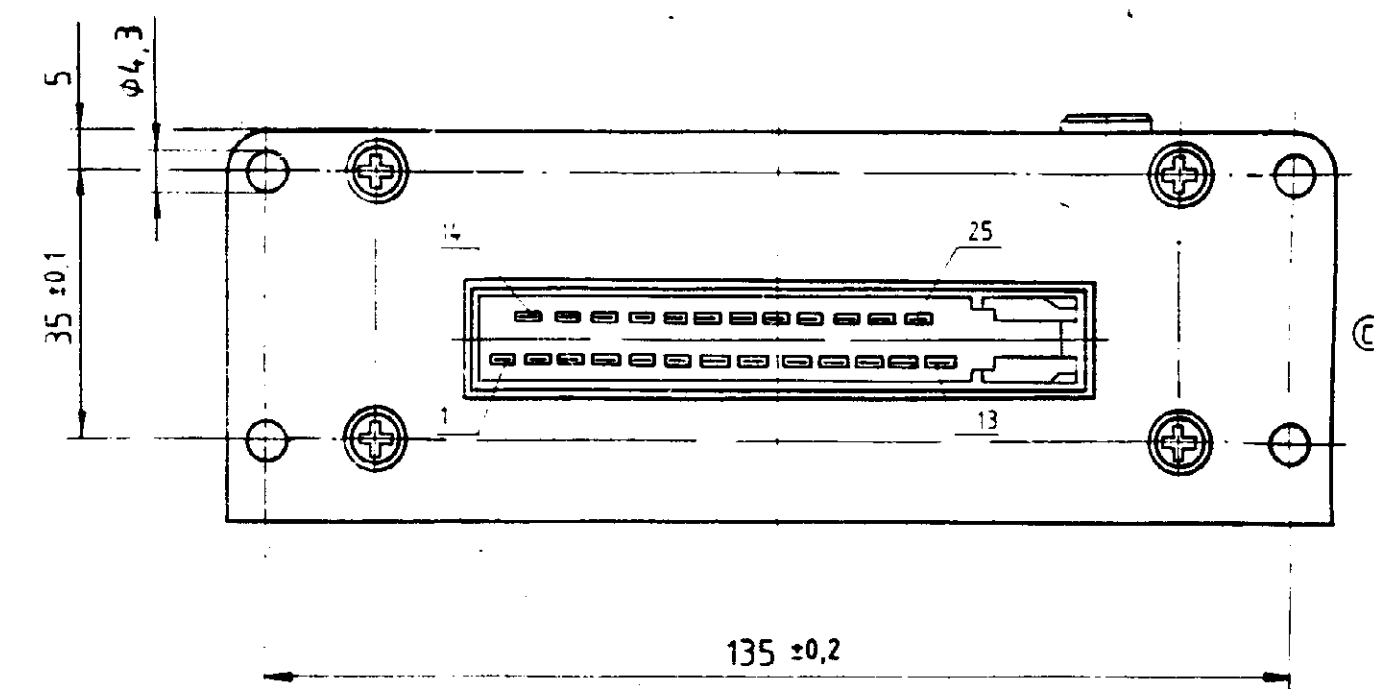


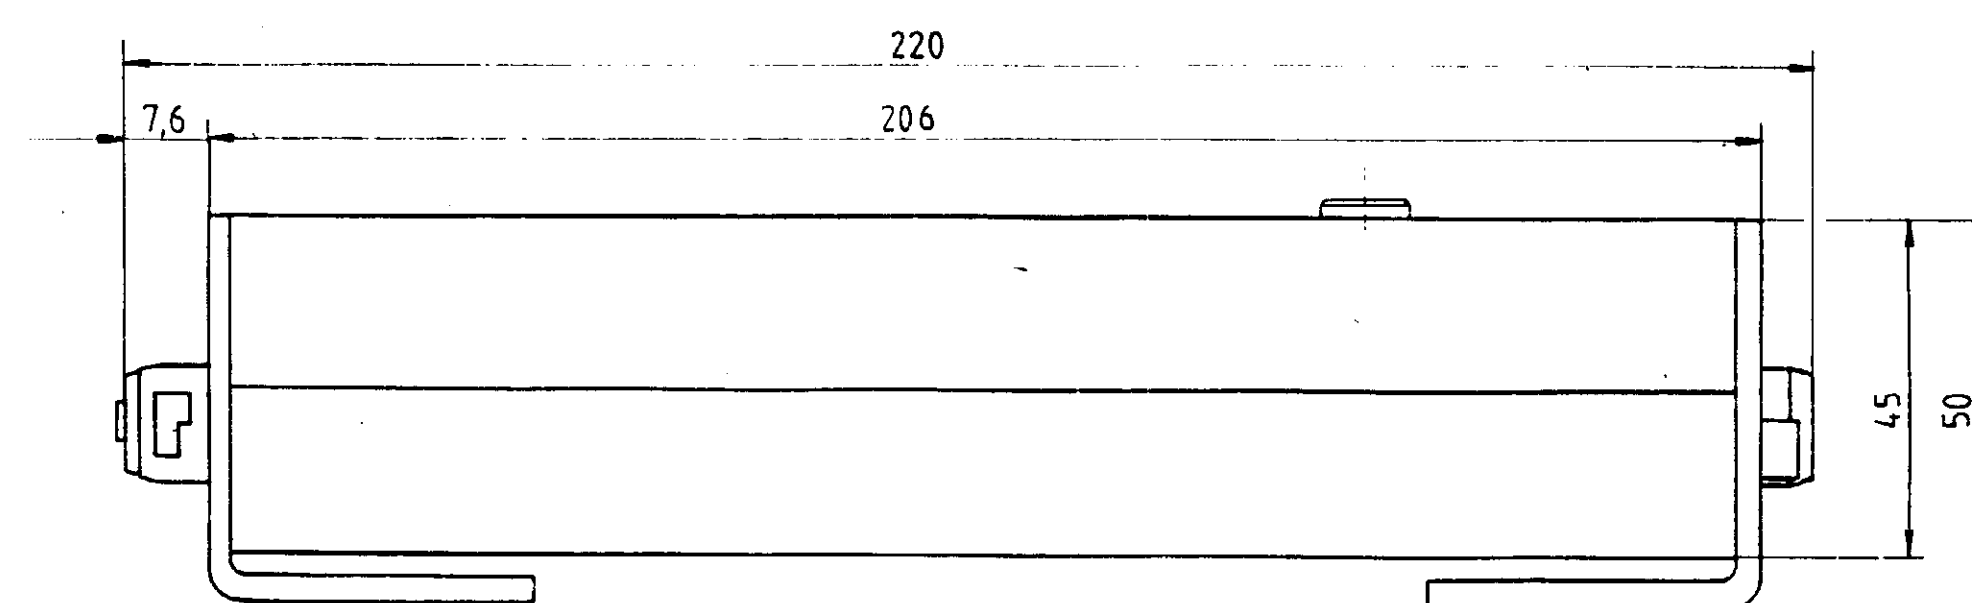

ETS-L

VOLTAGE  
SPANNUNG  
VOLTAGE  
VOLTAGGIO

24V ±25 %

THERMAL RANGE OF APPLICATION  
THERMISCHER ANWENDUNGSBEREICH  
GAMME D'APPLICATION THERMIQUE  
CAMPO DI APPLICAZIONE

-40°C ... +75°C

TYPE OF PROTECTION  
SCHUTZART  
MODE DE PROTECTION  
TIPO DI PROTEZIONE

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION  
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION  
POUR INFORMATION COMPLÉMENTAIRES VOIR LES SPÉCIFICATIONS DU PRODUIT  
PER INFORMAZIONI ULTERIORI VEDI LA SPECIFICAZIONE DEL PRODOTTO

DATE OF MANUFACTURE  
 (B) HERSTELLDATUM ≥ KW 46 / 91  
 DATE DE FABRICATION  
 DATA DI FABBRICAZIONE

STÖRUNGSANZEIGE:

Normalbetrieb  
 $t_{\text{ein}} = t_{\text{aus}} = 2 \text{ s}$

**WABCO**  
446 020 013 0

|                                    |       |     |       |                      |  |                |  |                                    |  |
|------------------------------------|-------|-----|-------|----------------------|--|----------------|--|------------------------------------|--|
| FURTHER TECHNICAL DATA SEE         |       |     |       | L                    |  | COPYRIGHT      |  | WABCO                              |  |
| IDENTIFICATION No                  |       |     |       | K                    |  | DATE           |  | SIGNATURE                          |  |
| CODE FOR DOCUMENT 605 SHEET 10     |       |     |       | J                    |  | DRAWN          |  | AUTM DOGR CONTROL ELECT. CONV      |  |
| GENERAL TOLERANCES                 |       |     |       | H                    |  | 90.02.19       |  | THERM                              |  |
| RANGE OF NOMINAL DIMENSIONS (± mm) |       |     |       | G                    |  | 90.02.19       |  | CHECKED                            |  |
| CLASS                              | ± mm  |     |       | F                    |  | SYNTHESIZATION |  | TUERAUTJMATIK ELEKTR. REVERSIERUNG |  |
|                                    | 1     | 2   | 3     | E                    |  | 90.02.19       |  |                                    |  |
| 1                                  | ± 0.5 | ± 1 | ± 1.5 | D                    |  | MASS SCALE     |  | IDENTIFICATION                     |  |
| 2                                  | ± 0.5 | ± 1 | ± 1.5 | C                    |  | 0.800          |  | 446 020 013 0                      |  |
| 3                                  | ± 0.5 | ± 1 | ± 1.5 | B                    |  | 1:1            |  | CODE FOR DOCUMENT 605              |  |
| 4                                  | ± 0.5 | ± 1 | ± 1.5 | A                    |  | SIZE 142       |  | SHEET 1/1                          |  |
| TAPPED HOLES ACC ISO 4039          |       |     |       | 96359 3 C 95.02.02   |  | A 1            |  | 100% OF SHADE GROUP                |  |
| TOLERANCE CLASS (CROSSMARKED)      |       |     |       | 97979 1 X 92.06.19   |  | 142            |  | CODE FOR SHADE 659                 |  |
|                                    |       |     |       | V 66870 2 A 90.10.04 |  | 142            |  | REPLACEMENT FOR                    |  |
|                                    |       |     |       | V 61100 0 REV DATE   |  | 142            |  |                                    |  |