

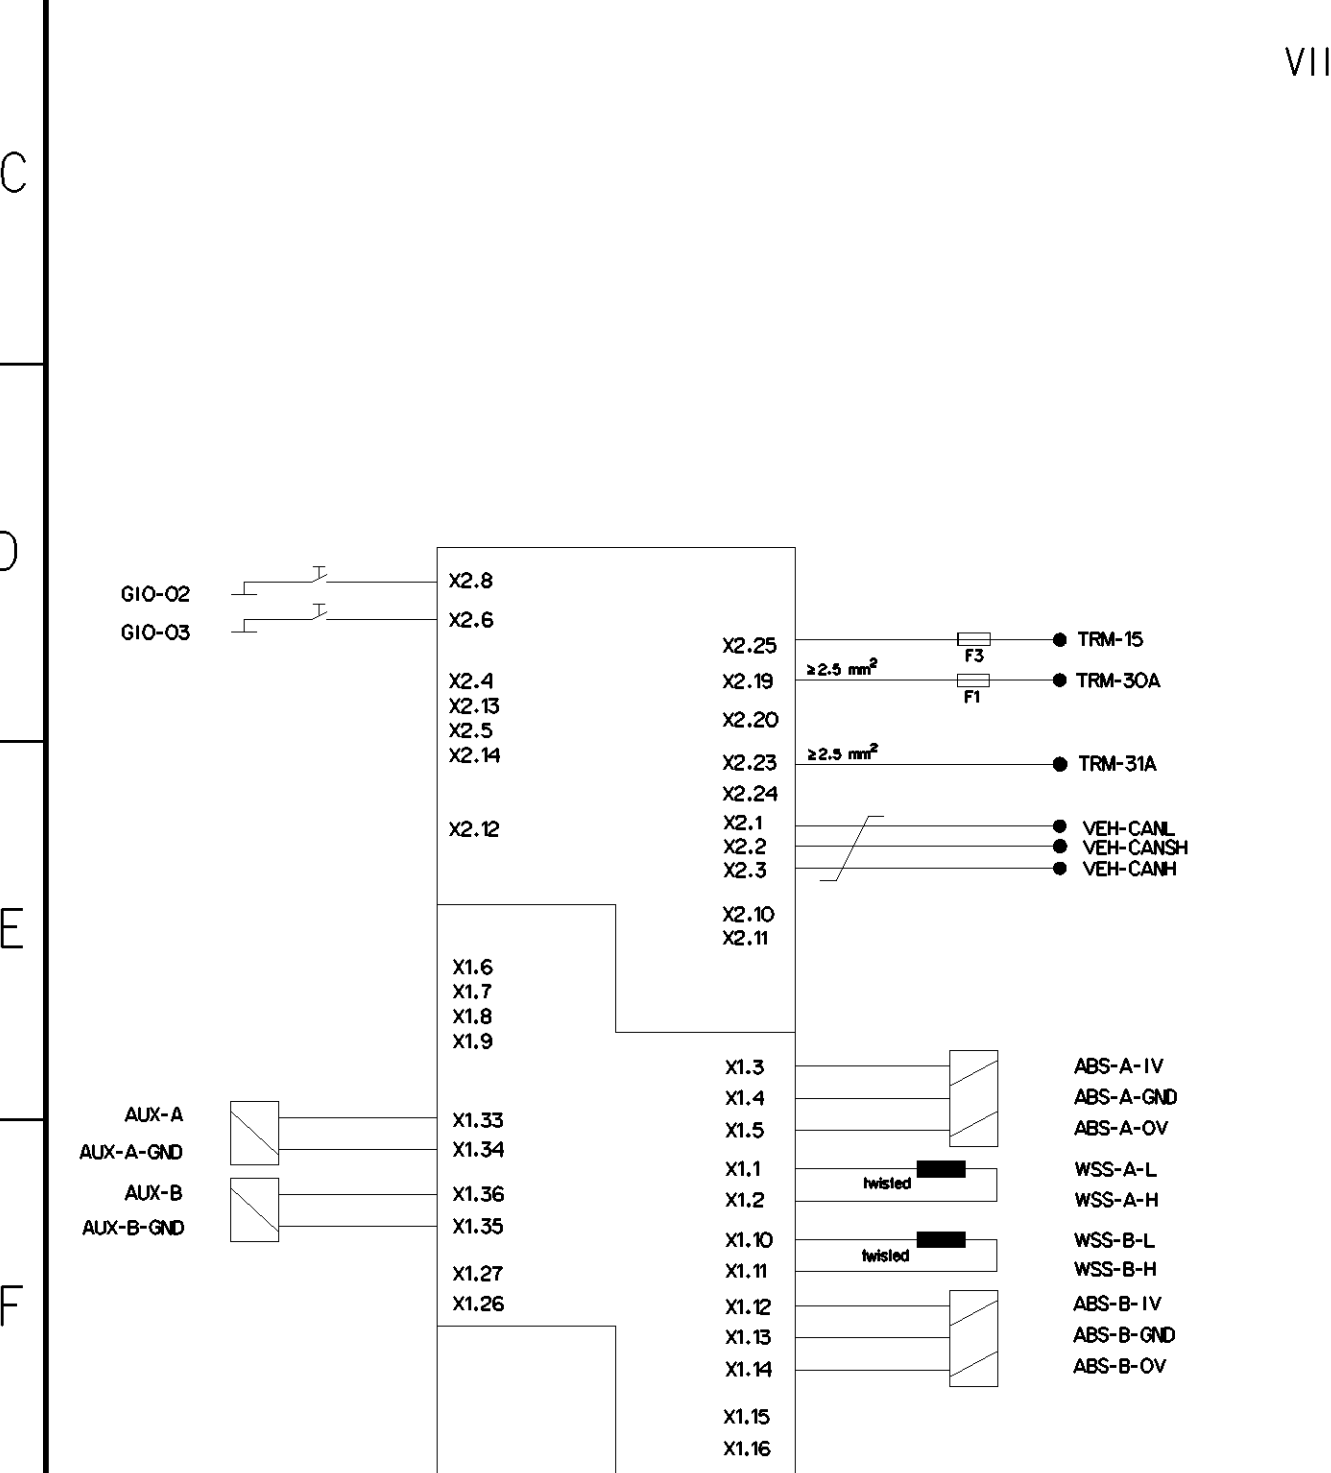
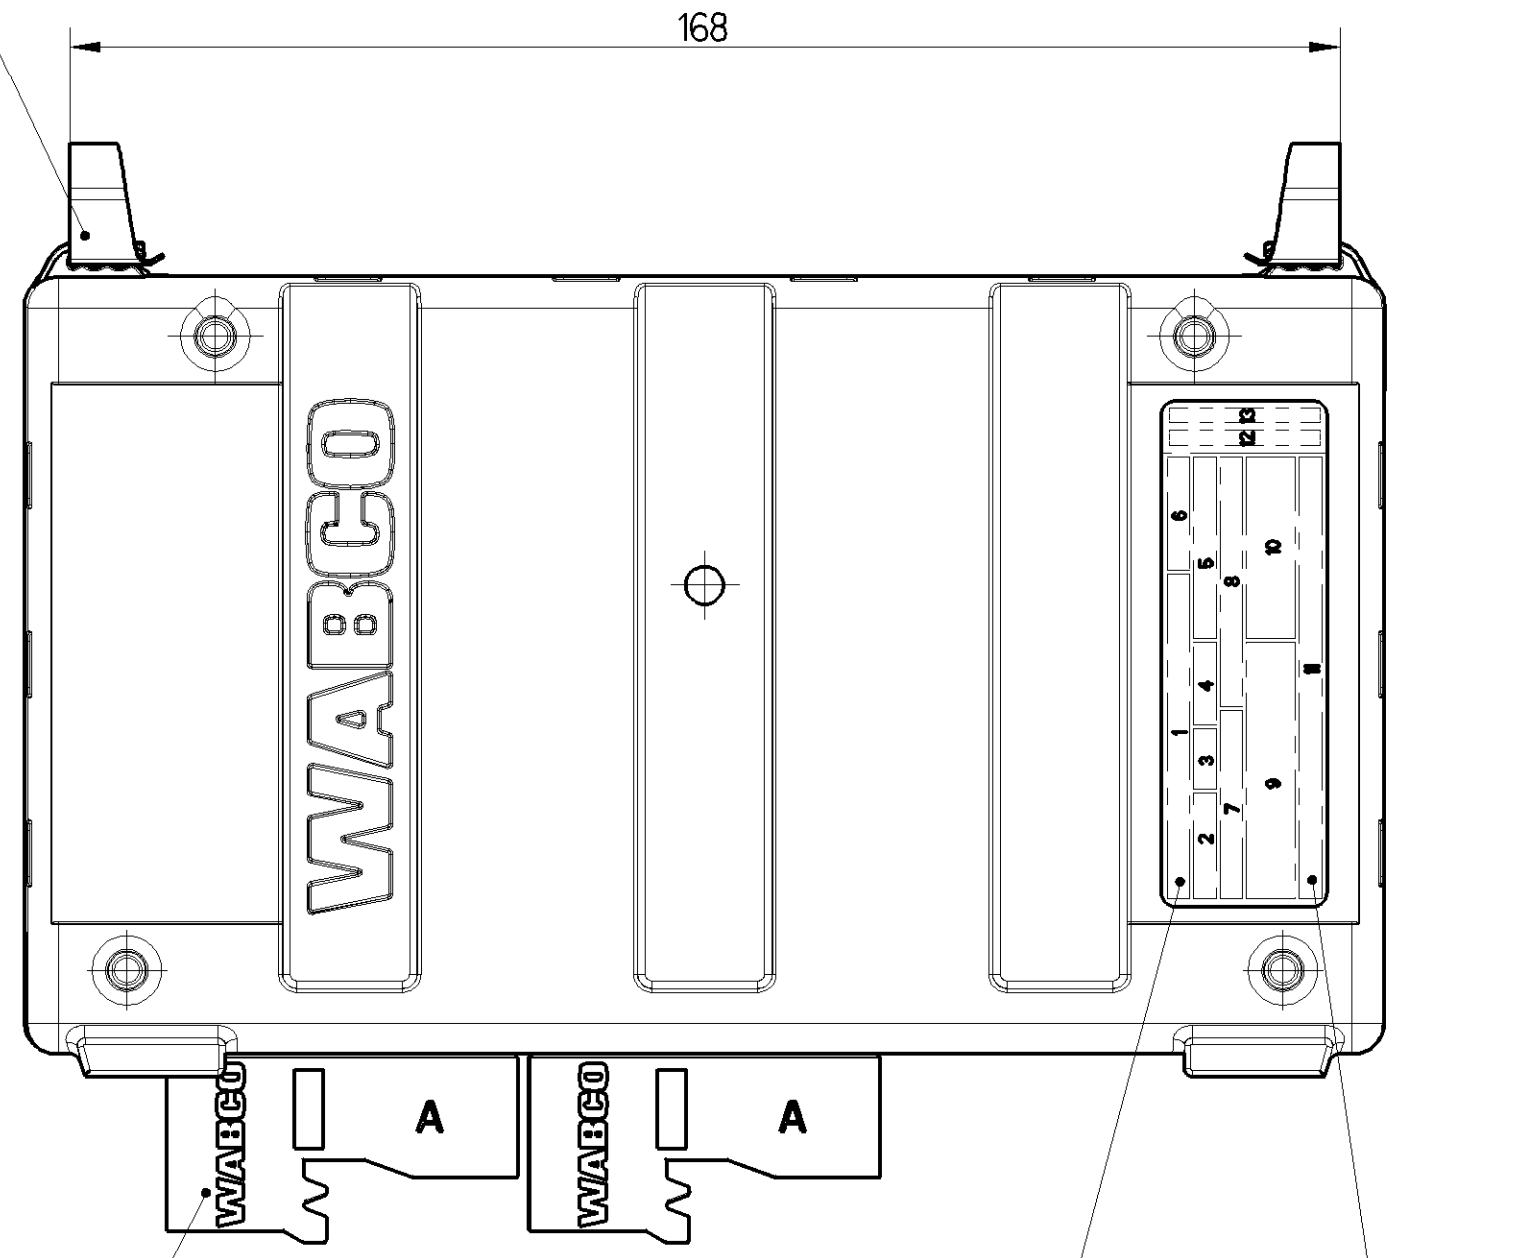


A	MATERIAL MATERIAL		COATING/SURFACE PROTECTION BESCHICHTUNG/OBERFLÄCHENSCHUTZ	
	I	II	III	IV
B	II	Ultradur S 4090 G4		
	III	PBT/ASA-GF30 FR	JED-764-6	
	IV	X12CrNi		
	V	POLYESTER		
	VI	CuSn0.15 R420		Sn Ni 0,8-3 µm 1-3 µm
C	VII	Steel	JED-051M5	Zn-Ni JED-739-4

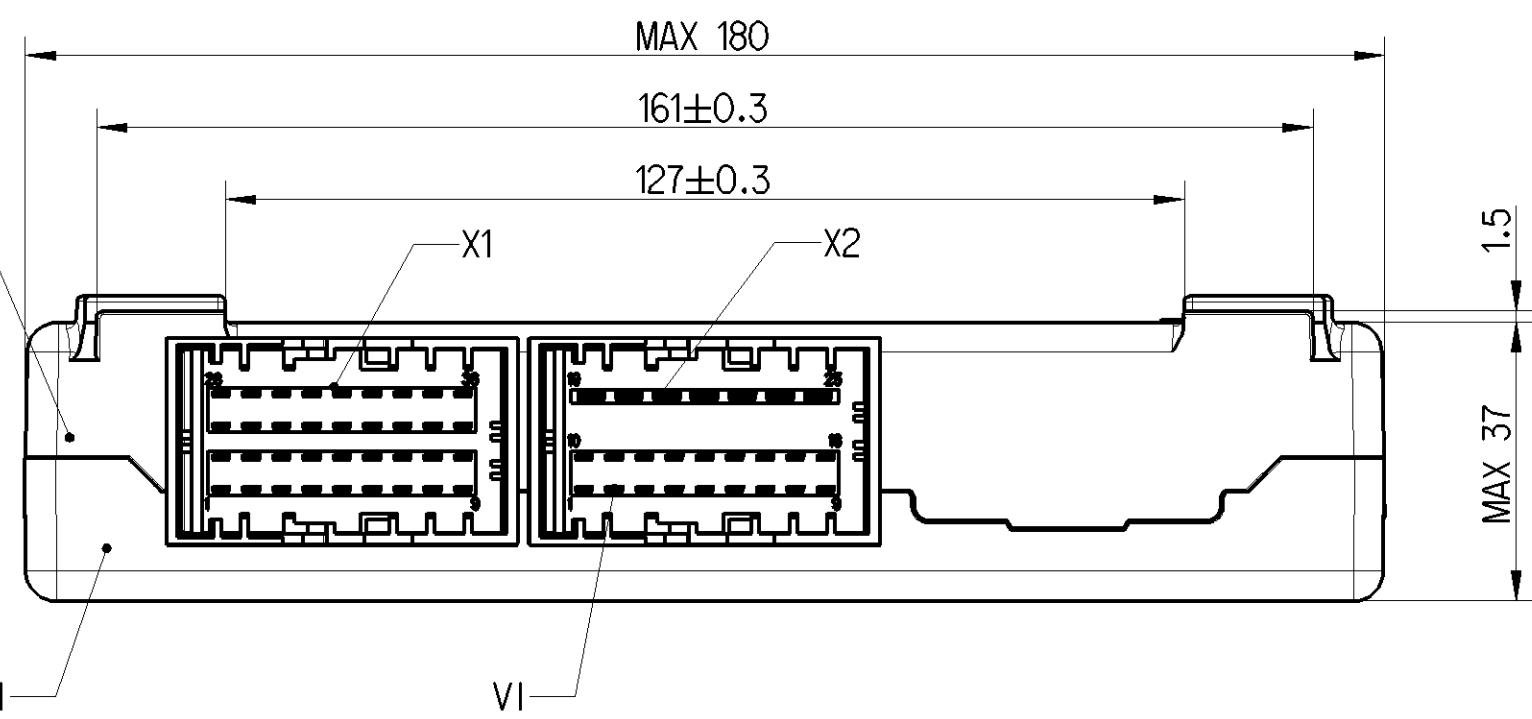





Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto a fini di lucro.
Il copyright di questo documento è riservato a WABCO e non può essere utilizzato senza permesso scritto dalla WABCO.
Tous droits de reproduction, de diffusion ou de communication de ce document sont réservés à WABCO.
Alle Rechte für den Fall der Vervielfältigung oder Verbreitung sind vorbehalten.
Copyright of this document and giving it to others and the use or communication of the content thereof, are forbidden without express written permission from WABCO. All rights reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Tout réimpression ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite de WABCO.
Alle Rechte für den Fall der Vervielfältigung oder Verbreitung sind vorbehalten.
Copyright of this document and giving it to others and the use or communication of the content thereof, are forbidden without express written permission from WABCO. All rights reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

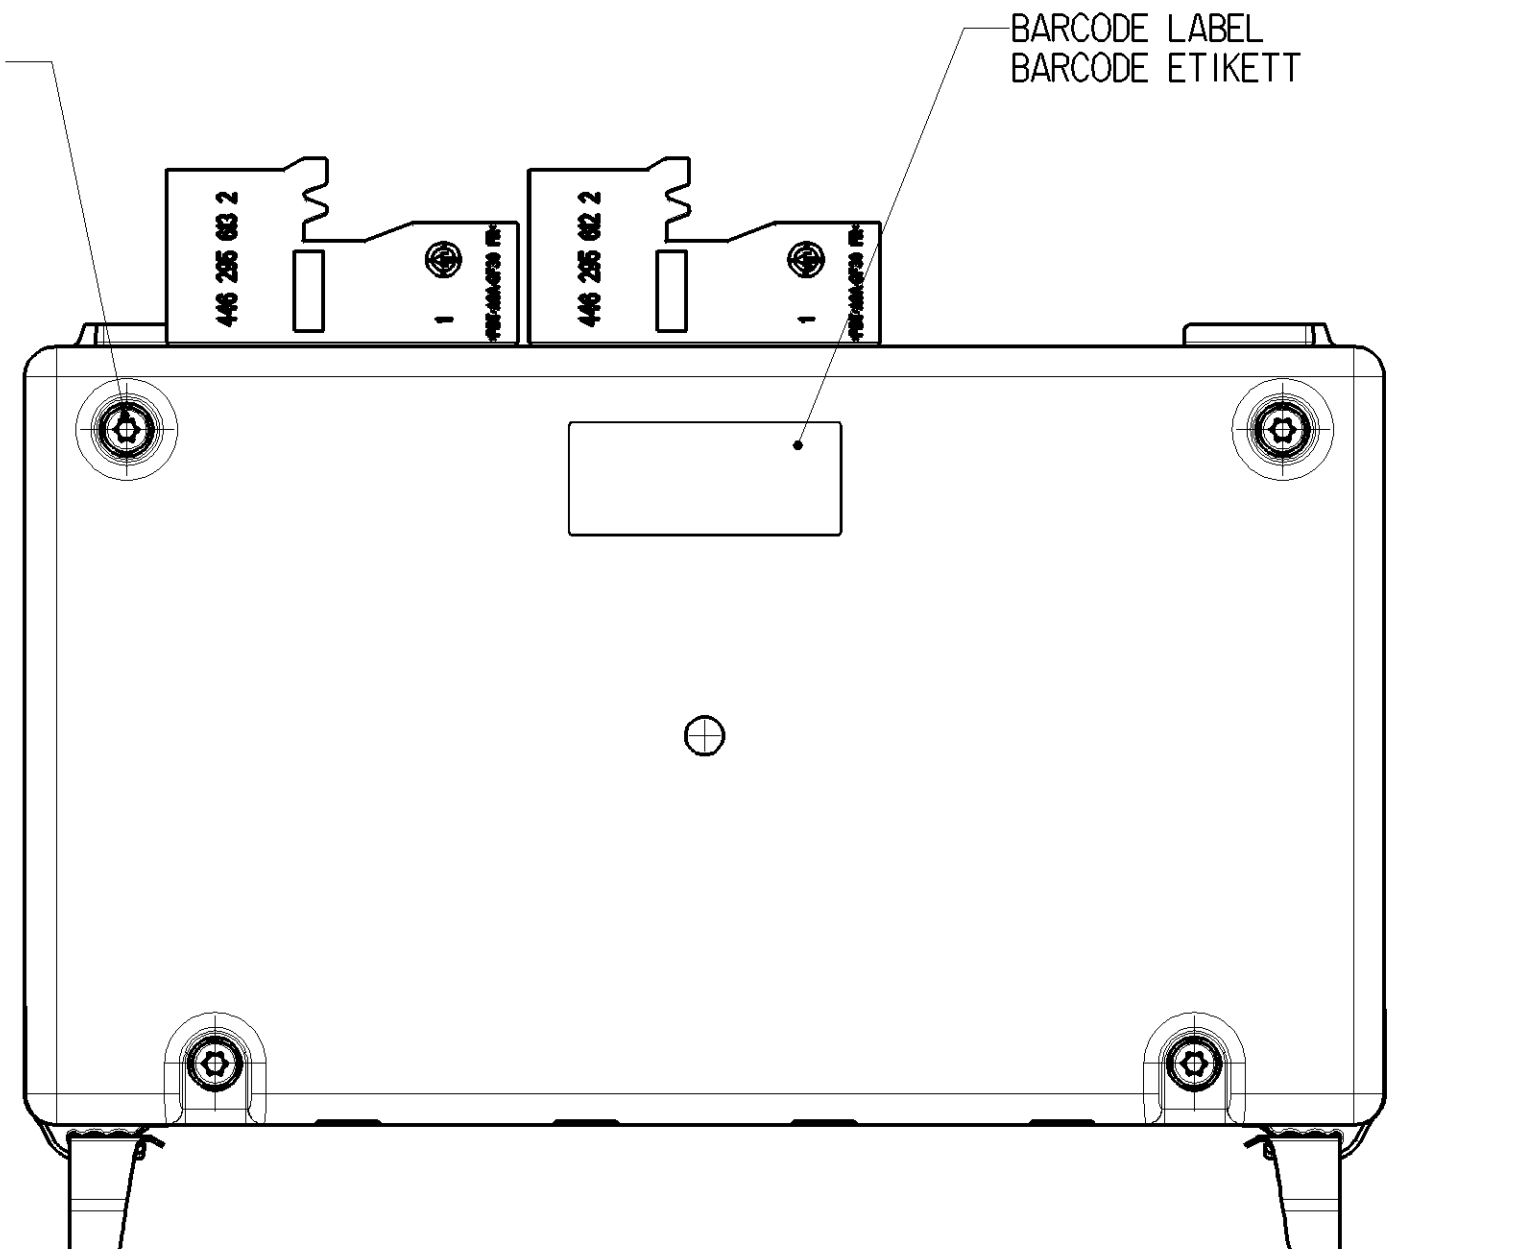

SEE LABELING INFORMATION
SIEHE LABELING INFORMATION

IT IS RECOMMENDED TO GROUND THE SPRINGS BY MOUNTING RACK
ES WIRD EMPFOHLEN, DIE FEDERN MIT E-FACH MASSE ZU VERBINDEN

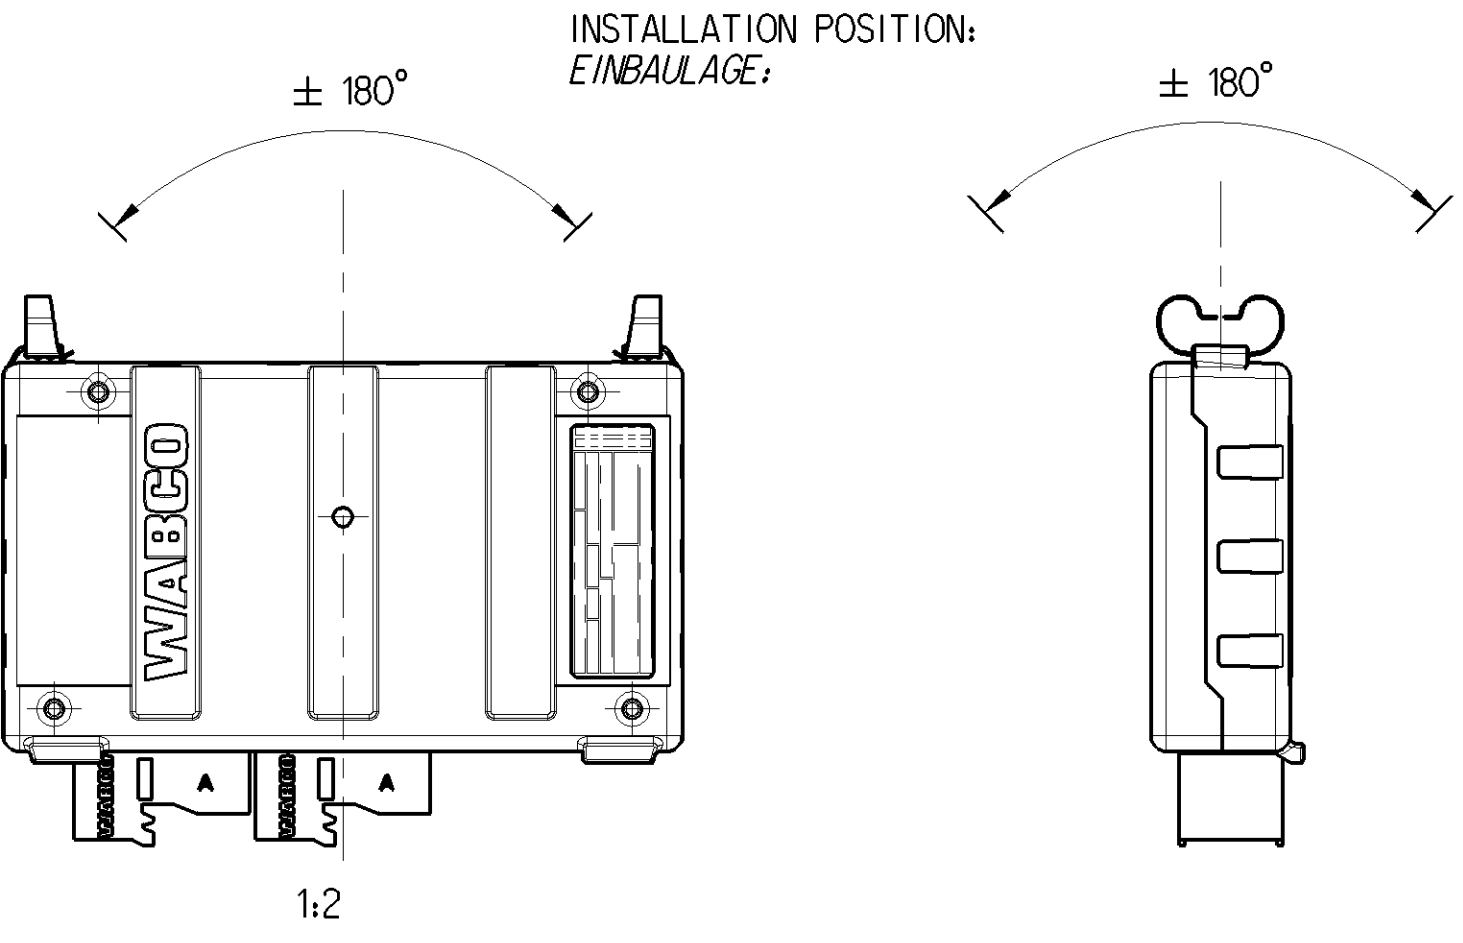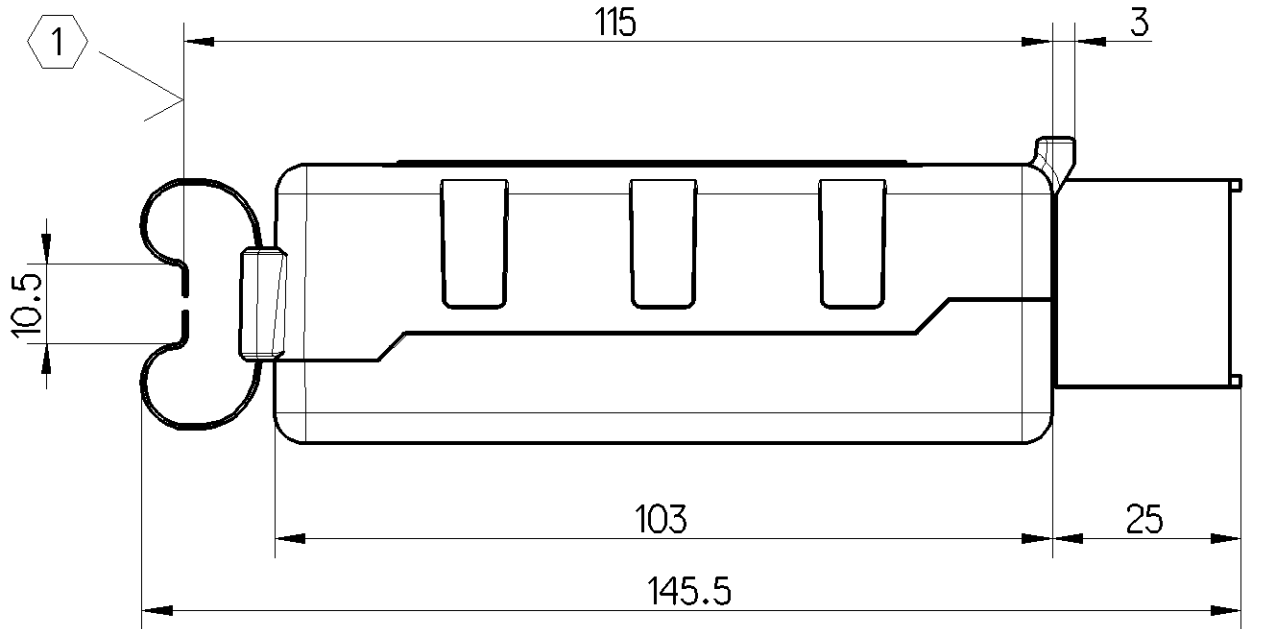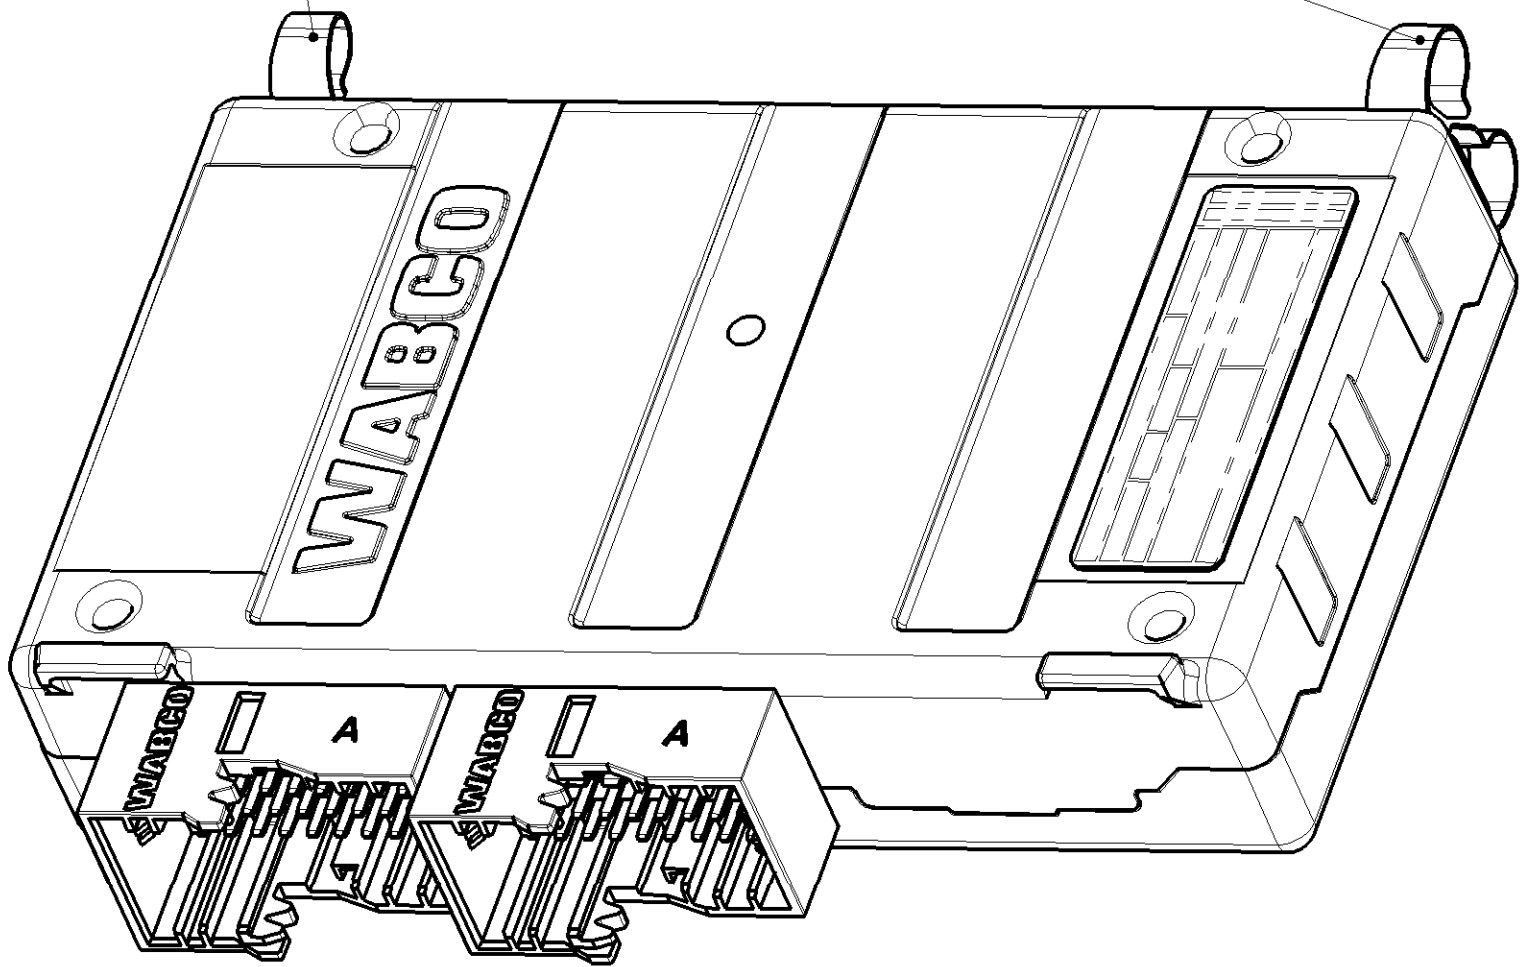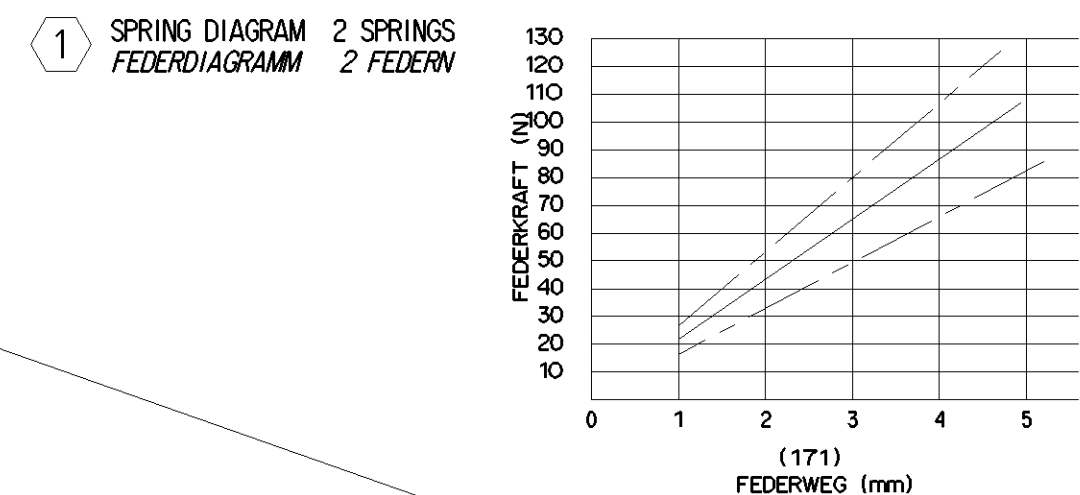

VOLTAGE:
SPANNUNG: 20V...32V DC

PROTECT TYPE:
SCHUTZART: IP 40 (IEC 529)

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40 °C ... +80 °C

NON-OPERATING TEMPERATURE:
TEMPERATUR AUSSER BETRIEB: -40 °C ... +90 °C

MAX. CURRENT TERMINAL 15:
MAX. STROM KLEMME 15: 10mA

MAX. CURRENT TERMINAL 30A:
MAX. STROM KLEMME 30A: 27A

WABCO LABEL / CUSTOMER LABEL:
CONTENTS SEE DOCUMENT "LABELING INFORMATION" (446 033 000 0 DOC. 922)
WABCO-KENNZEICHNUNG / KUNDEN- KENNZEICHNUNG:
INHALT SIEHE DOKUMENT "LABELING INFORMATION" (446 033 000 0 DOC. 922)

LABELING INFORMATION	
No	FIELD DESCRIPTION
1	DC -LOGO AND CUSTOMER NUMBER / ZGS
2	WABCO - 16 - JED369
3	PRI
4	DATE OF MANUFACTURE (JED-226) week / year
5	SERIAL NUMBER
6	CERTIFICATION NUMBER
7	WABCO IDENTIFICATION NUMBER
8	DEVICE IDENTIFICATION NAME
9	BARCODE ACC. TO ISO/IEC16390 INTERLEAVE 2 OF 5, WITHOUT CHECK DIGIT POS. 1-4: BARCODE HEADER POS. 5-10: SERIAL NUMBER
10	EMC HOMOLOGATION MARK
11	COUNTRY OF ORIGIN
12	
13	
NOTE FOR 1-13: REFER TO CCT FOR DETAILS	

CONNECTOR MESSERLEISTE	NUMBER OF PINS ANZAHL DER KONTAKTSTIFTE	CONNECTOR TYPE ANSCHLUSSTYP	MBT - DESIGN RULE MBT-AUSFÜHRUNGSVORSCHRIFT
X1	2 x 18	C-114-18664, Coding A Rev.F2	A 005 000 33 99
X2	18 + 7	C-114-18721, Coding A Rev.A1	A 005 000 34 99

General Specification: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		Date of first issue: 2015-04-17	
Further Technical Data: 446 033 000 0		Date: 2016-04-12		Doc. Code: 005	
Doc. Code: 035		Sheet: 1 To 13		Language: DE	
General Tolerances JED-261		Checked: Heydi		Expert: Hechl	
Range of Nominal Dimensions (± mm)		2016-04-13		Hechl	
Class 1) 1) ≤ 50 > 50 > 180 > 400 > 400		Mass		Material No.	
Fine X 0.5 1.0 1.5 2.0		0.309		446 033 000 0	
Medium X 1.0 2.0 3.0 4.0		1:1		Date of first issue: 2015-04-17	
Coarse 2.0 3.5 5.0 6.5		Size		Doc. Code: 005	
Tapped Holes acc.		CAD System		Language: DE	
1) Tolerance Class Applied Crossmarked		A 1 CREO		Sheet: 1/1	
		ECN-No. 170564		Techn. Resp. 6835	
		Revision: 1x		Replacement for 8849100370	