

STAMP : WHITE
AUFDRUCK : WEISS
MARQUAGE : BLANC
STAMPIGLIATURA : BIANCO

SURFACE GRAINED ACCORDING TO JED-533.063
 OBERFLAECHE GENARBT GEMAESS JED-533.063
 SURFACE GRAINEE SELON JED-533.063
 SUPERFICIE GRANITA SECONDO JED-533.063


VOLTAGE
SPANNUNG 24V±25% DC
VOLTAGE
VOLTAGGIO

THERMAL RANGE OF APPLICATION
 THERMISCHER ANWENDUNGSBEREICH -20° C...+70° C
 PLAGE DE TEMPERATURE EN UTILISATION
 CAMPO TERMICO DI APPLICAZIONE

TYPE OF PROTECTION ACC. TO IEC 529
SCHUTZART NACH IEC 529 IP 64
MODE DE PROTECTION SUIVANT IEC 529
TIPO DI PROTEZIONE SECONDO IEC 529

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VERDERE SPECIFICA DI PRODOTTO

DATE OF MANUFACTURE:
HERSTELLDATUM: JED-226
DATE DE FABRICATION:
DATA DI FABRICAZIONE:

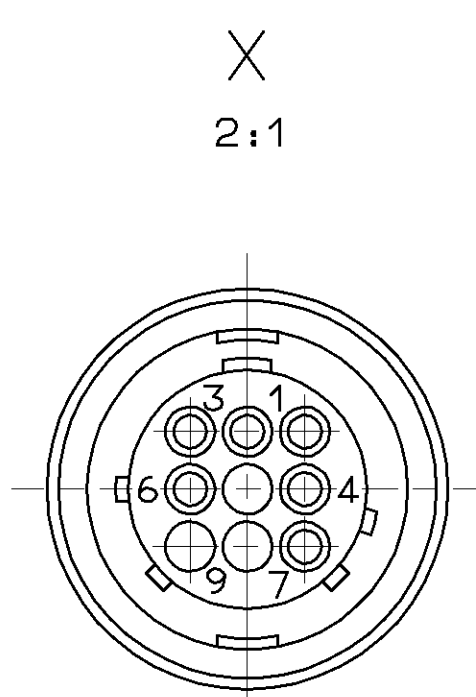

1	+UB	KL. 15
2	GROUND MASSE	KL. 31
3	CLOCK TAKT	ECAS
4	DATA DATEN	ECAS
6	CLOCK TAKT	PTO
7	DATA DATEN	PTO

GENERAL SPECIFICATION: JED-334				CADAUN-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE SIGNATURE			
DOC. CODE: SHEET: TO				DRAWN: 93-12-09 PFENNIG		CONTROL ELEMENT BEDIENEINHEIT ELEMENT DE COMMANDE ELEMENTO DI COMANDO	
GENERAL TOLERANCES				CHECKED: 93-12-09			
STANDARDIZATION:							
CLASS 1) RANGE OF NOMINAL DIMENSIONS (± mm)				MASS SCALE		PRODUCT IDENTIFICATION NO.	
FINE ≤50 > 50 >180 >400 >2,0				0.30 1:1			
MEDIUM * 0,5 1,0 1,5 2,0 ± 3*				kg 2:1		DOC. CODE SHEET	
COARSE 1,0 2,0 3,0 4,0				SIZE 1:1		605 1/1	
2,0 3,5 5,0 6,5				A 1 142			
TAPPED HOLES ACC. ISO 4039 / JED-182						SHAPE CODE REPLACEMENT FOR	
1) TOLERANCE CLASS APPLIED CROSSMARKED		DOH-NO. REV. DATE					
9		100mm		EXPERT CODE 7198		PRODUCT TYPE 0120	