


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Tout e permis de reproduire ce document, de le exploiter ou de communiquer son contenu sans interdire, sans autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents hereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Werkzeuge sowie Verfertigung dieser Werkzeuge, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich ausgenommen. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

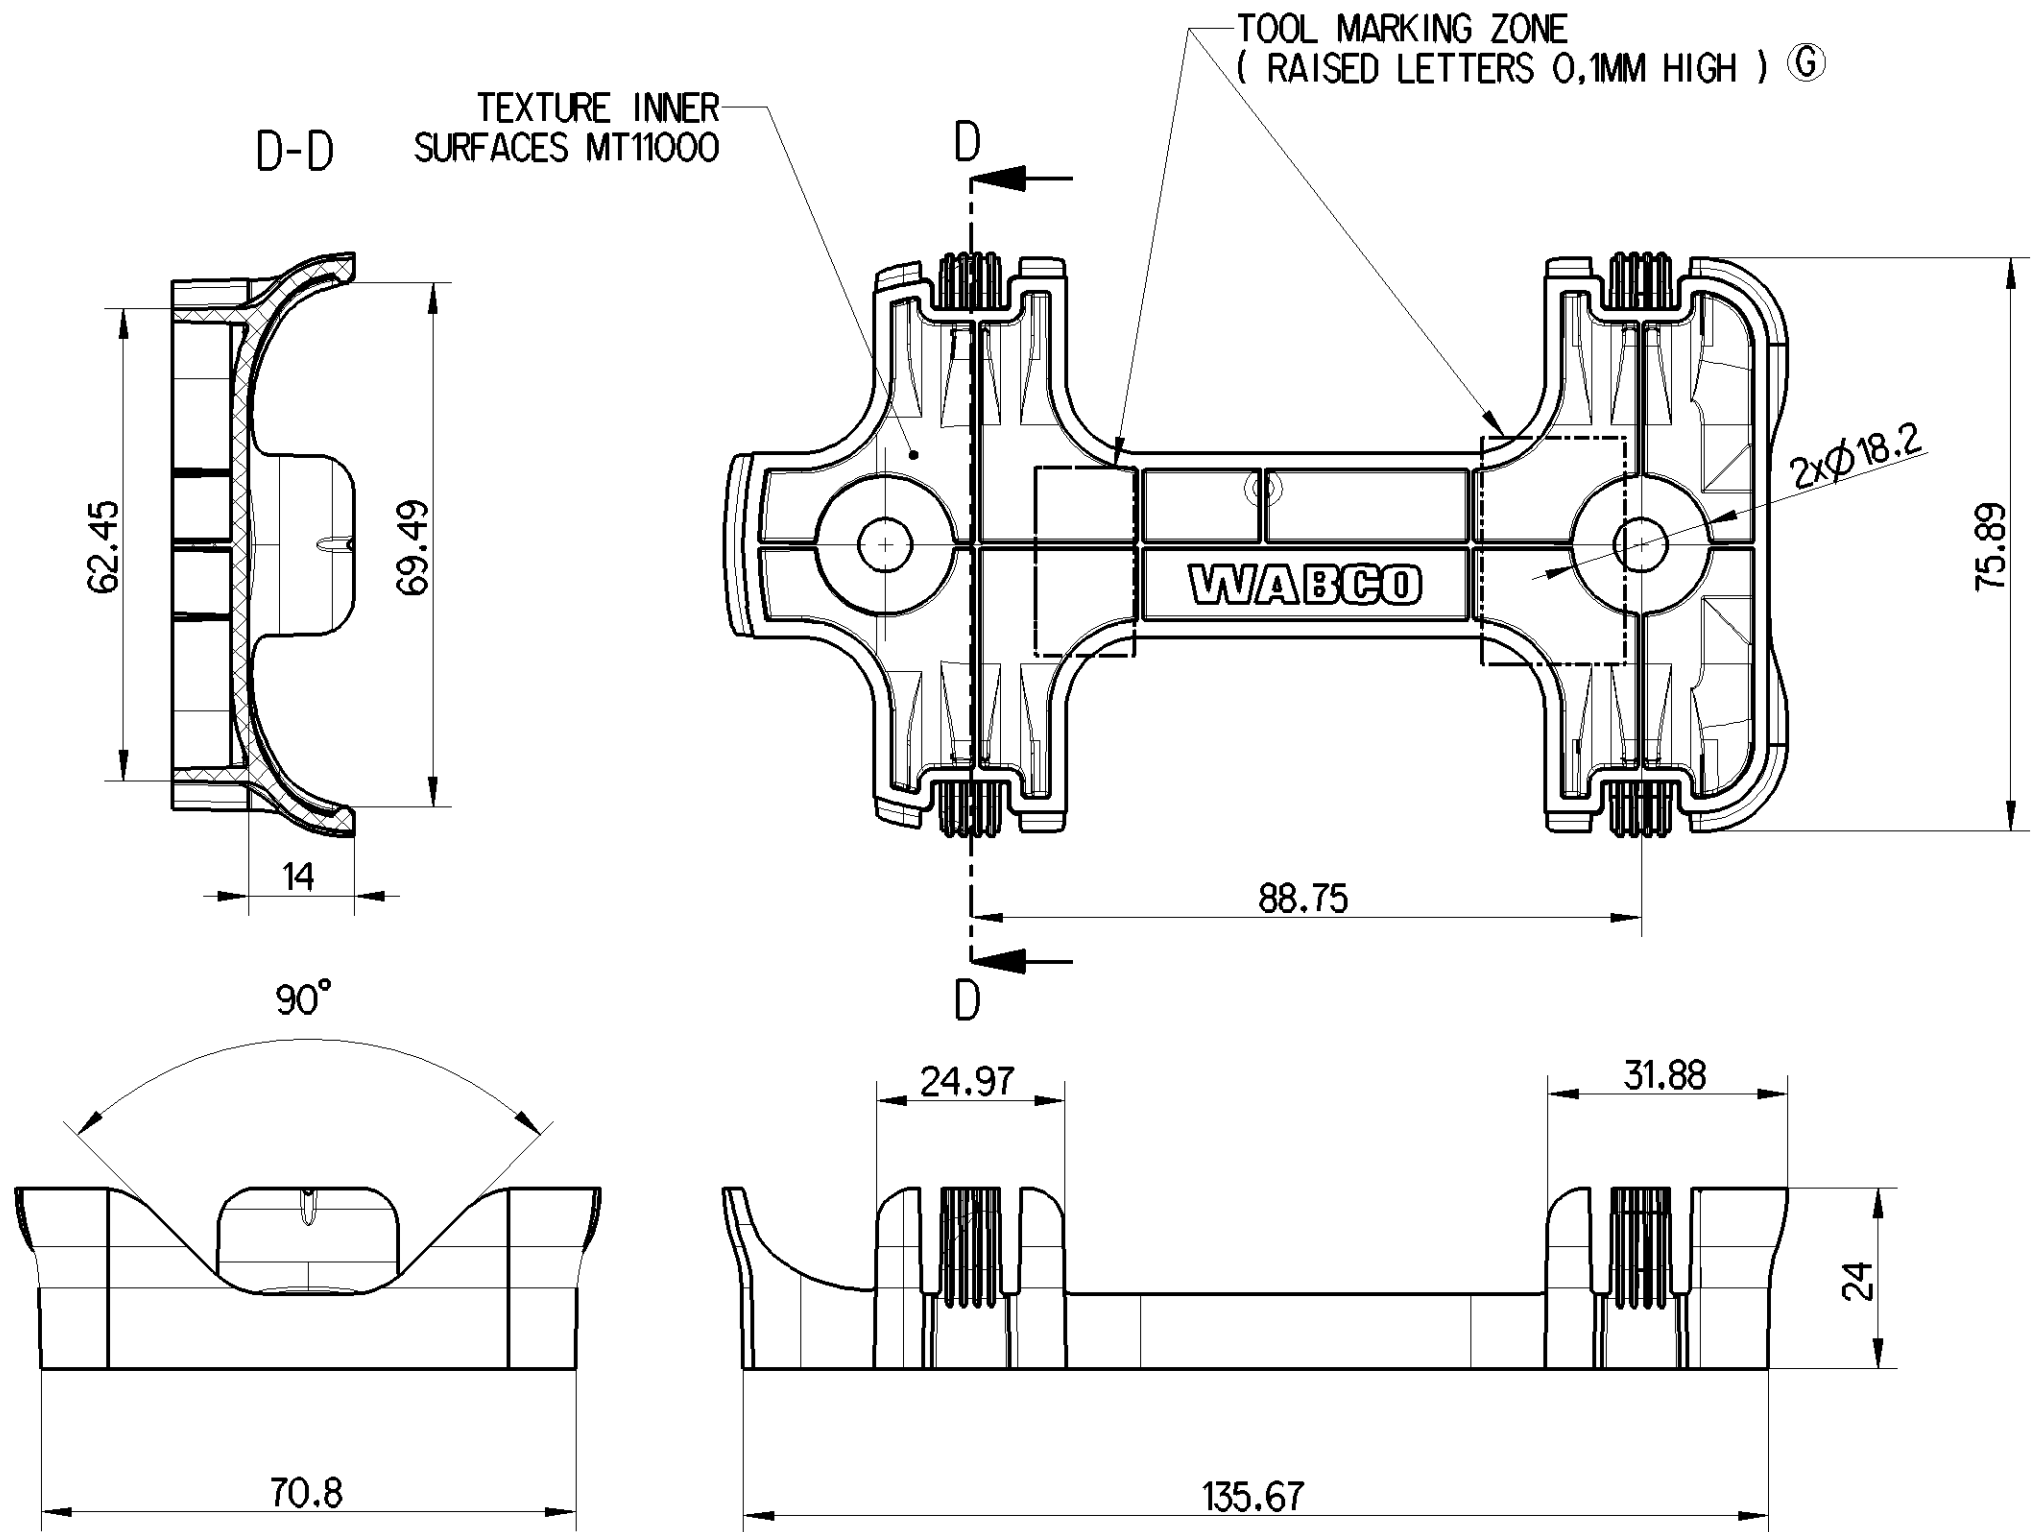

OPERATING TEMPERATURE : -40°C - +70°C



STORAGE TEMPERATURE : -40°C - +80°C

COLOUR : PANTONE BLACK 6


MATERIAL : ABS

EXAMPLE SCREW CONNECTION : FOR APPLICATION OF A SCREW M6 MAX 8.0 Nm
ISO 14583, PERMISSIBLE TORQUE


SURFACE GRAINED ACCORDING TO: MOLDTECH MT11000

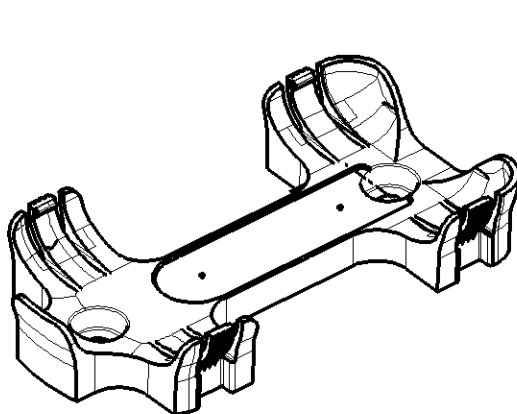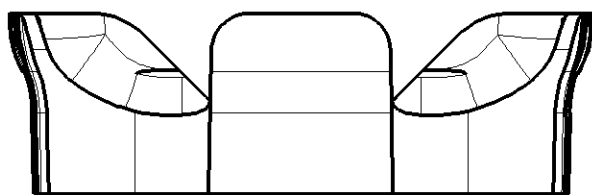

1:2

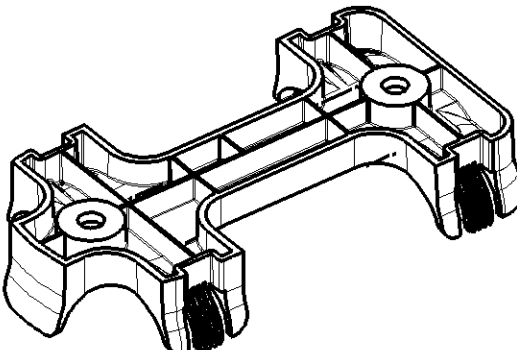

1:2

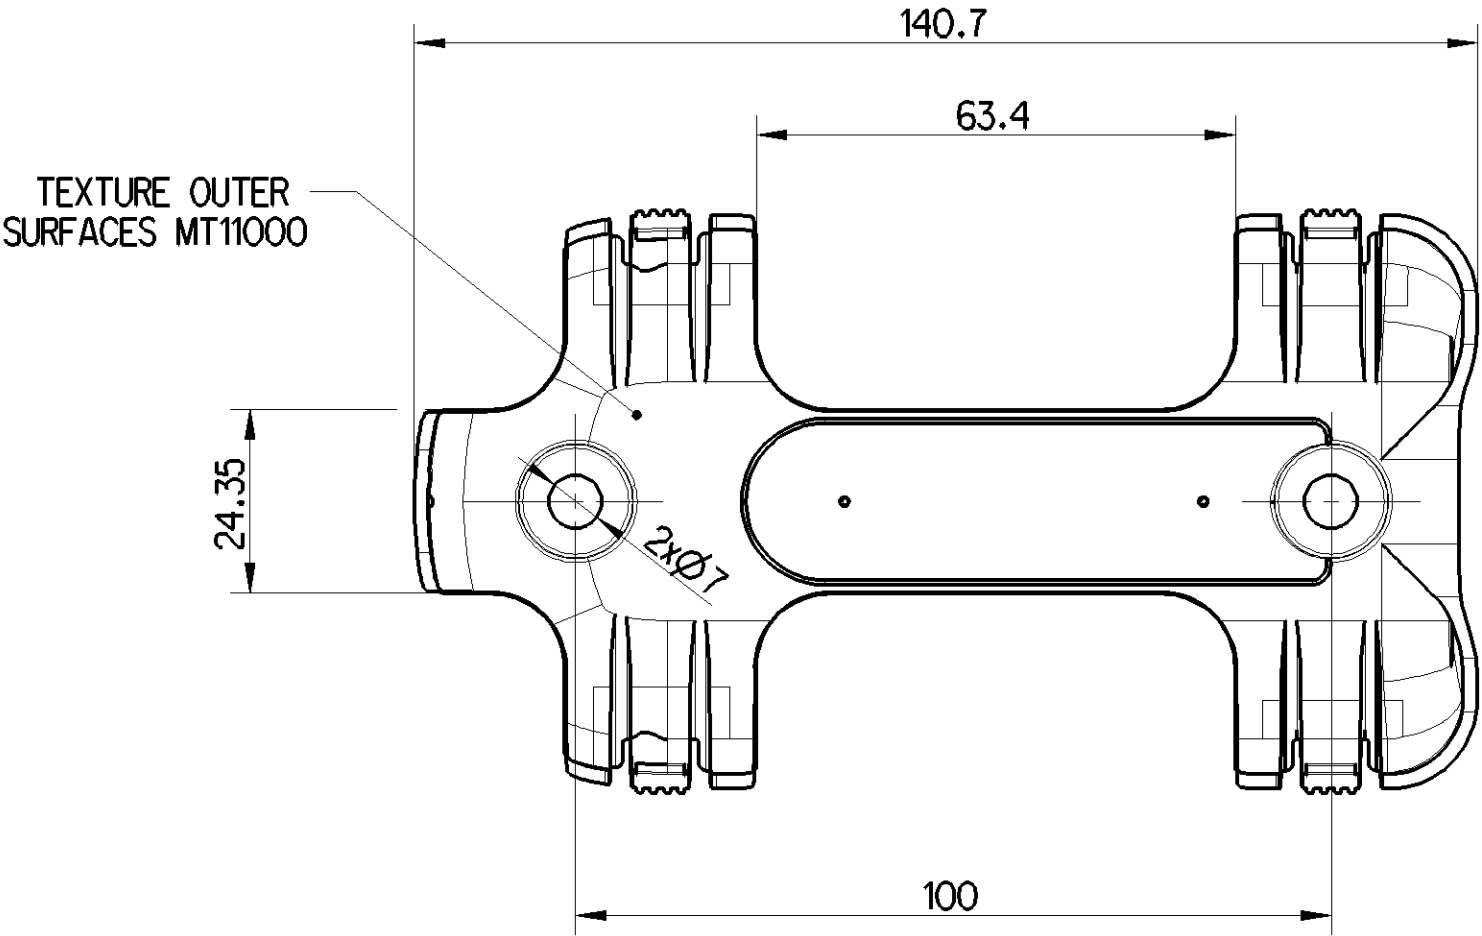

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO																	
Further Technical Data:						Date		Signature		Bracket for ECAS iRCU															
Doc. Code:		Sheet:		To		Drawn																			
General Tolerances JED-261						2018-06-12		Zak																	
Range of Nominal Dimensions (± mm)						Checked																			
						2018-06-19		Jovers																	
Class 1) <table><tr><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td></tr><tr><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table> ±3°						≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	0.5	1.0	1.5	2.0	1.0	2.0	3.0	4.0	2.0	3.5	5.0	6.5	Expert			
						≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																
						0.5	1.0	1.5	2.0																
1.0	2.0	3.0	4.0																						
2.0	3.5	5.0	6.5																						
						Jovers																			
Tapped Holes acc. 1) Tolerance Class Applied Crossmarked						Mass		Scale		Material No.		Date of first issue: 2015-10-22													
						0.031 KG		1:1		446 056 410 4		Doc.Code		Language		Sheet									
												005		EN		1/1									
						Size		CAD System				ECN-No.		Revision		Techn. Resp.		Replacement for							
						A 2		CREO				175785		1x G		6530		-							