

TYPE OF PROTECTION ACC. TO DIN 40050:
SCHUTZART NACH DIN 40050:
MODE DE PROTECTION SUIVANT DIN 40050
TIPO DI PROTEZIONE SECONDO DIN 40050

Y

WABCO

446 059 010 0


000 545 63 13

Z

PUSHBUTTON TASTER		SOLENOID-VALVE MAGNETVENTIL	
		MV I	MV II
	—	0	1
		1	0
		0	0
		1	1

1=TRIGGERED
1=ANGESTEUERT

CONTACT KONTAKT	COLOUR FARBE	①
1	RED ROT	(RD)
2	BROWN BRAUN	(BN)
3	YELLOW GELB	(YE)
4	BLUE BLAU	(BU)
1	GREEN GRÜN	(GN)

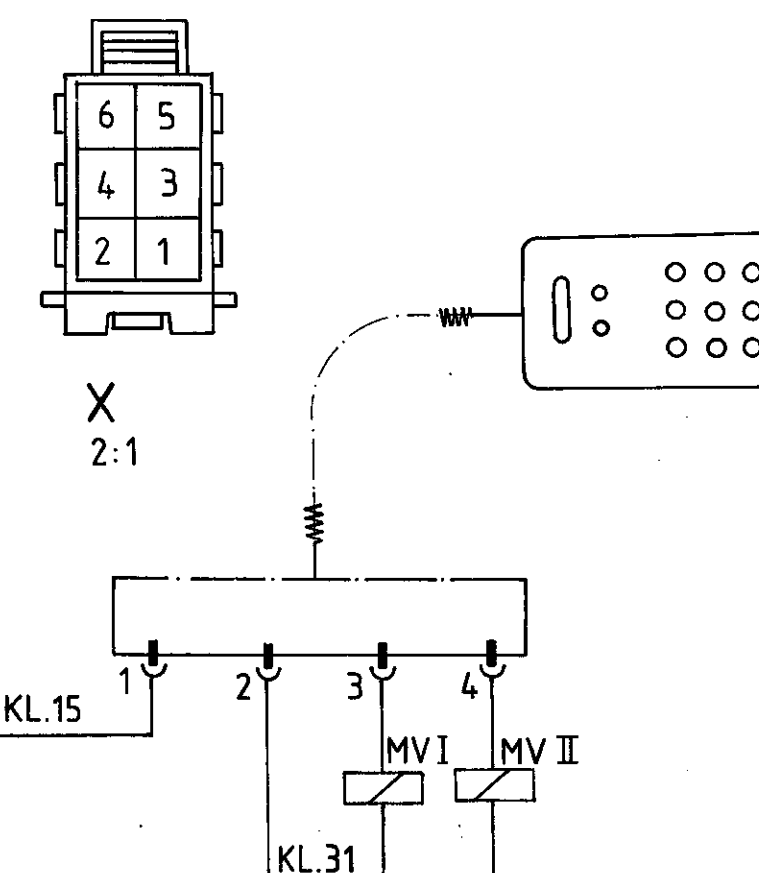

FURTHER TECHNICAL DATA SEE				
IDENTIFICATION No				
CODE FOR DOCUMENT		605	SHEET	TO
GENERAL TOLERANCES				
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)			
	1)	< 50	> 50 ≤ 180	> 180 ≤ 400
I		0.5	1	1.5
II	x	1	2	3
III		2	3.5	5
				6.5
TAPPED HOLES ACC ISO 4039				
1) TOLERANCE CLASS APPLIED CROSSMARKED				

[illegible]

COPYRIGHT BY WABCO		WABCO	
DATE	SIGNATURE	DB CONTAINER CONTROL HA DB CONTAINERSTEUERUNG HA	
87-08-17	<i>Wolke</i>		
CHECKED			
87-8-78 <i>Hausman</i>			
STANDARDIZATION			
87-08-18 <i>Stark</i>			
MASS	SCALE	CERTIFICATION	
1:1		446 059 010 0	CODE FOR "A" "B"
SIZE	TRI		605
A2	142	CODE FOR FUNCTION	CODE FOR SHAPE
		659	DEPT. APPROV.