

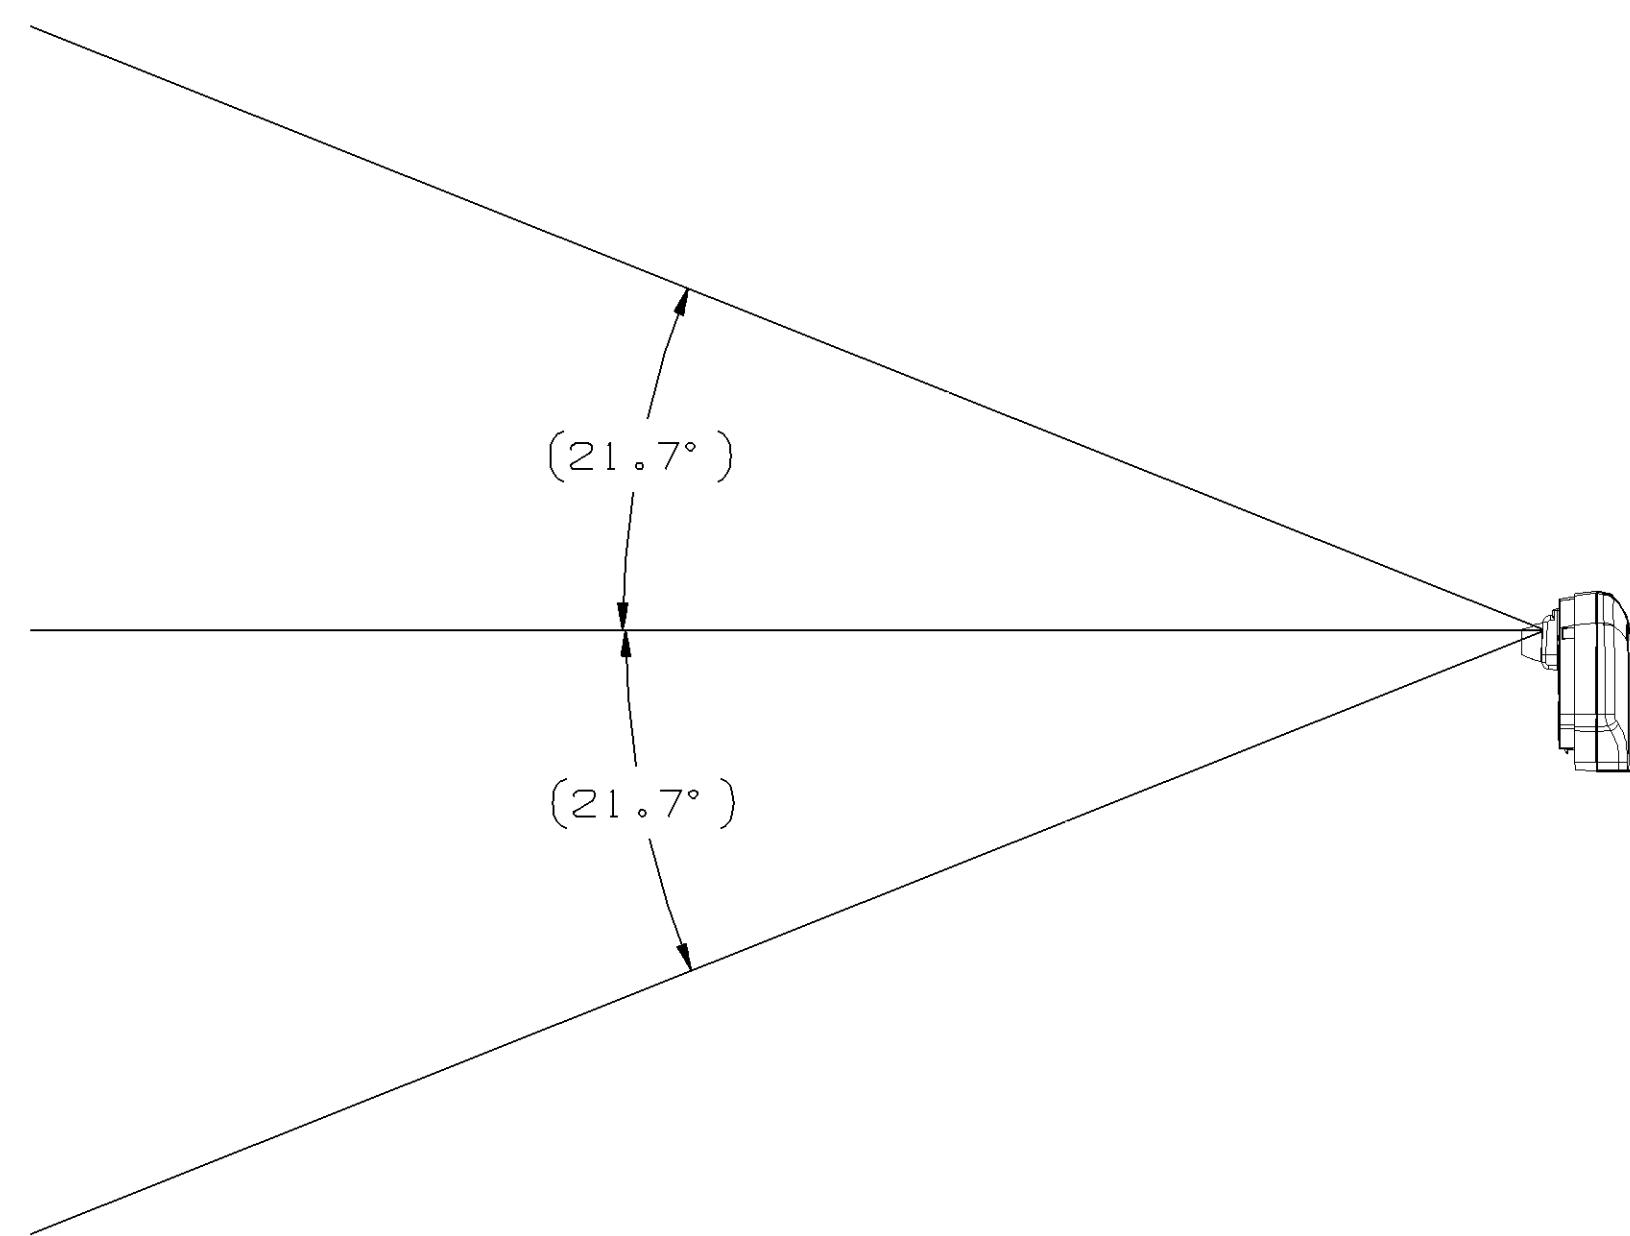
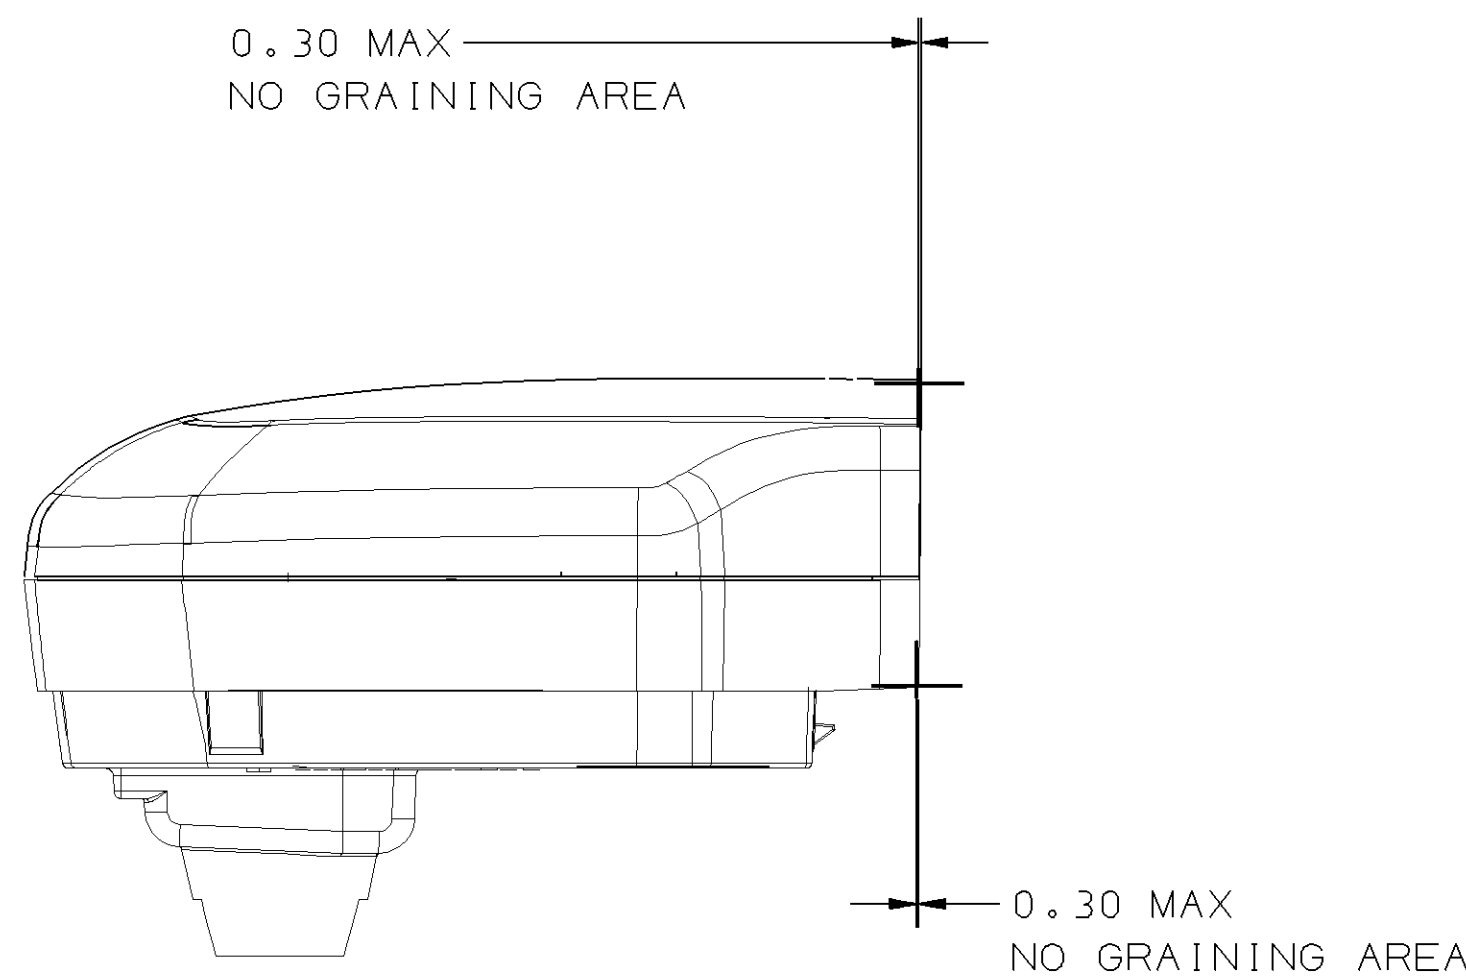
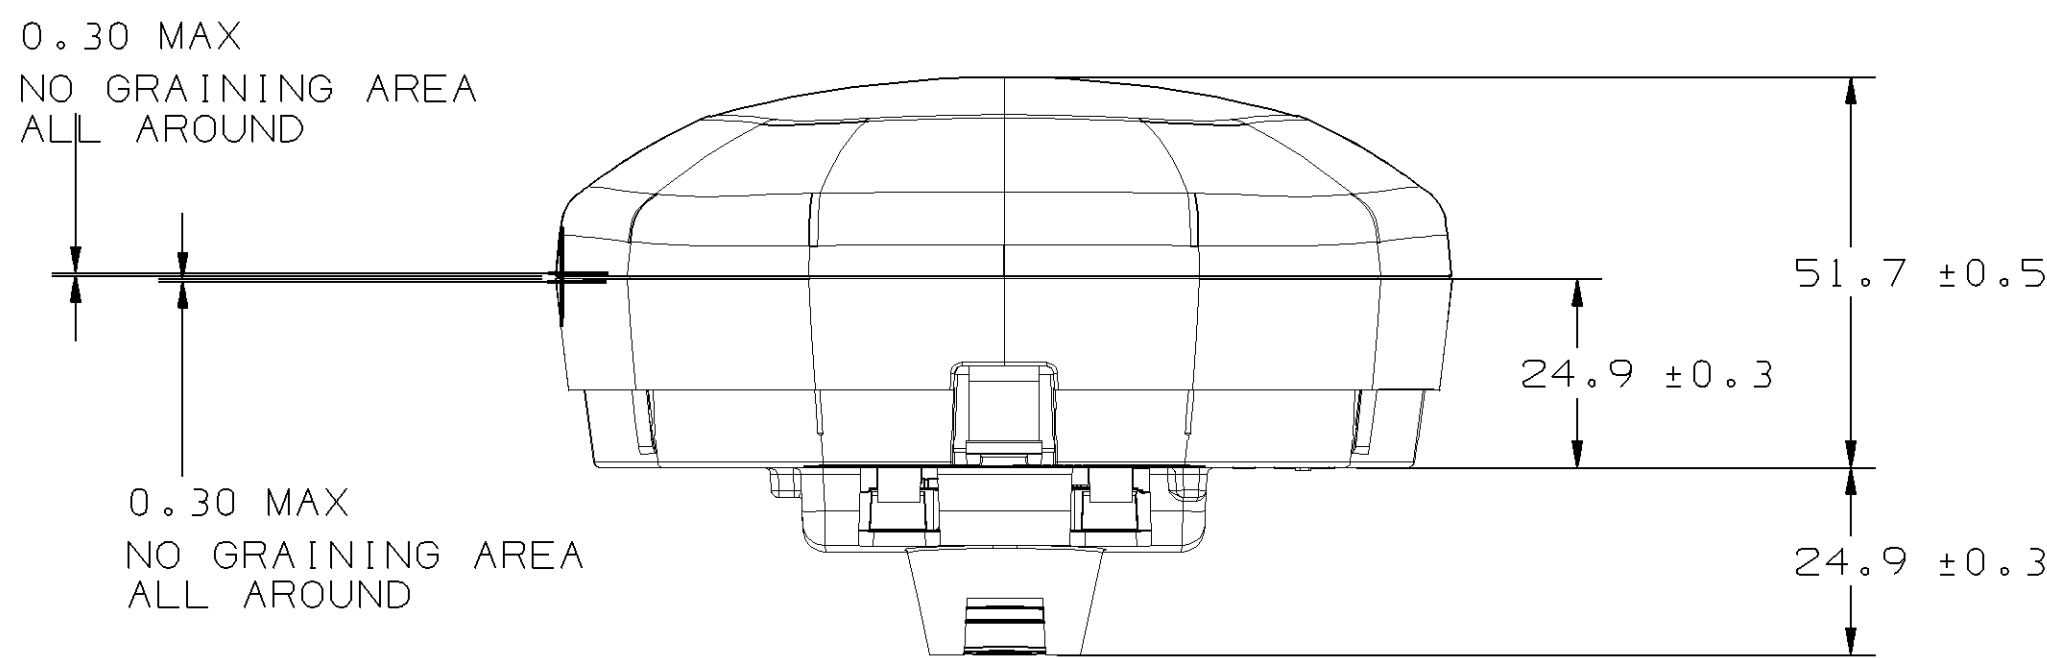
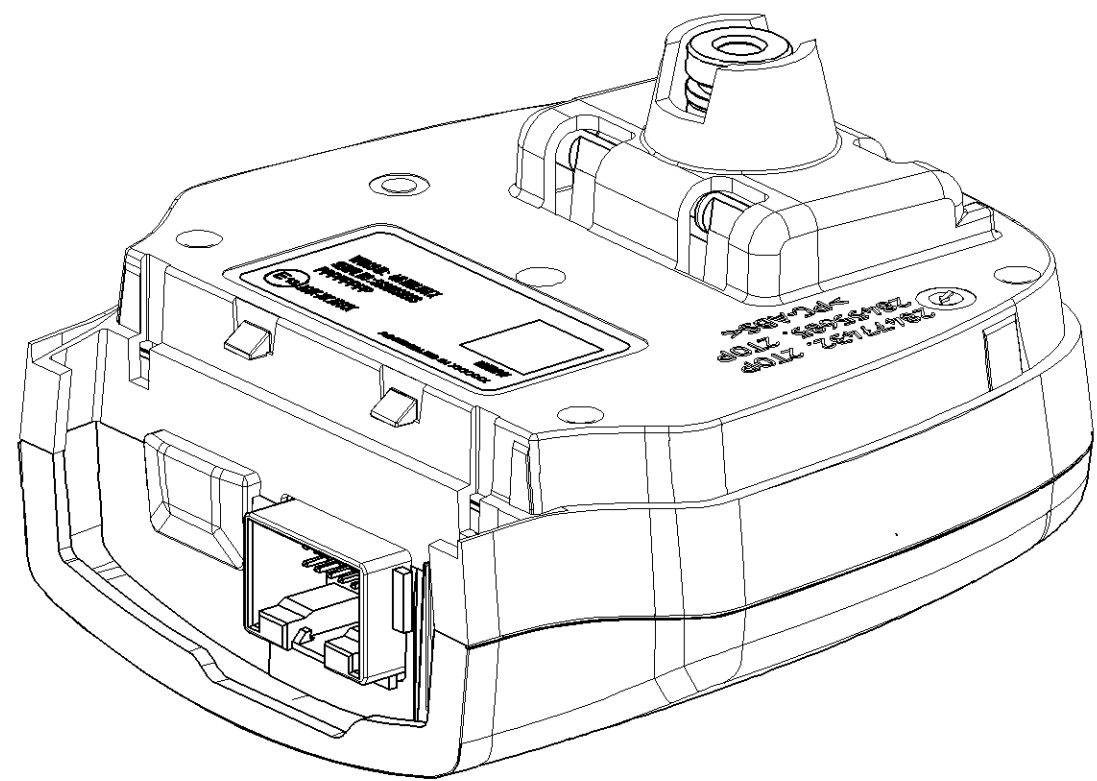
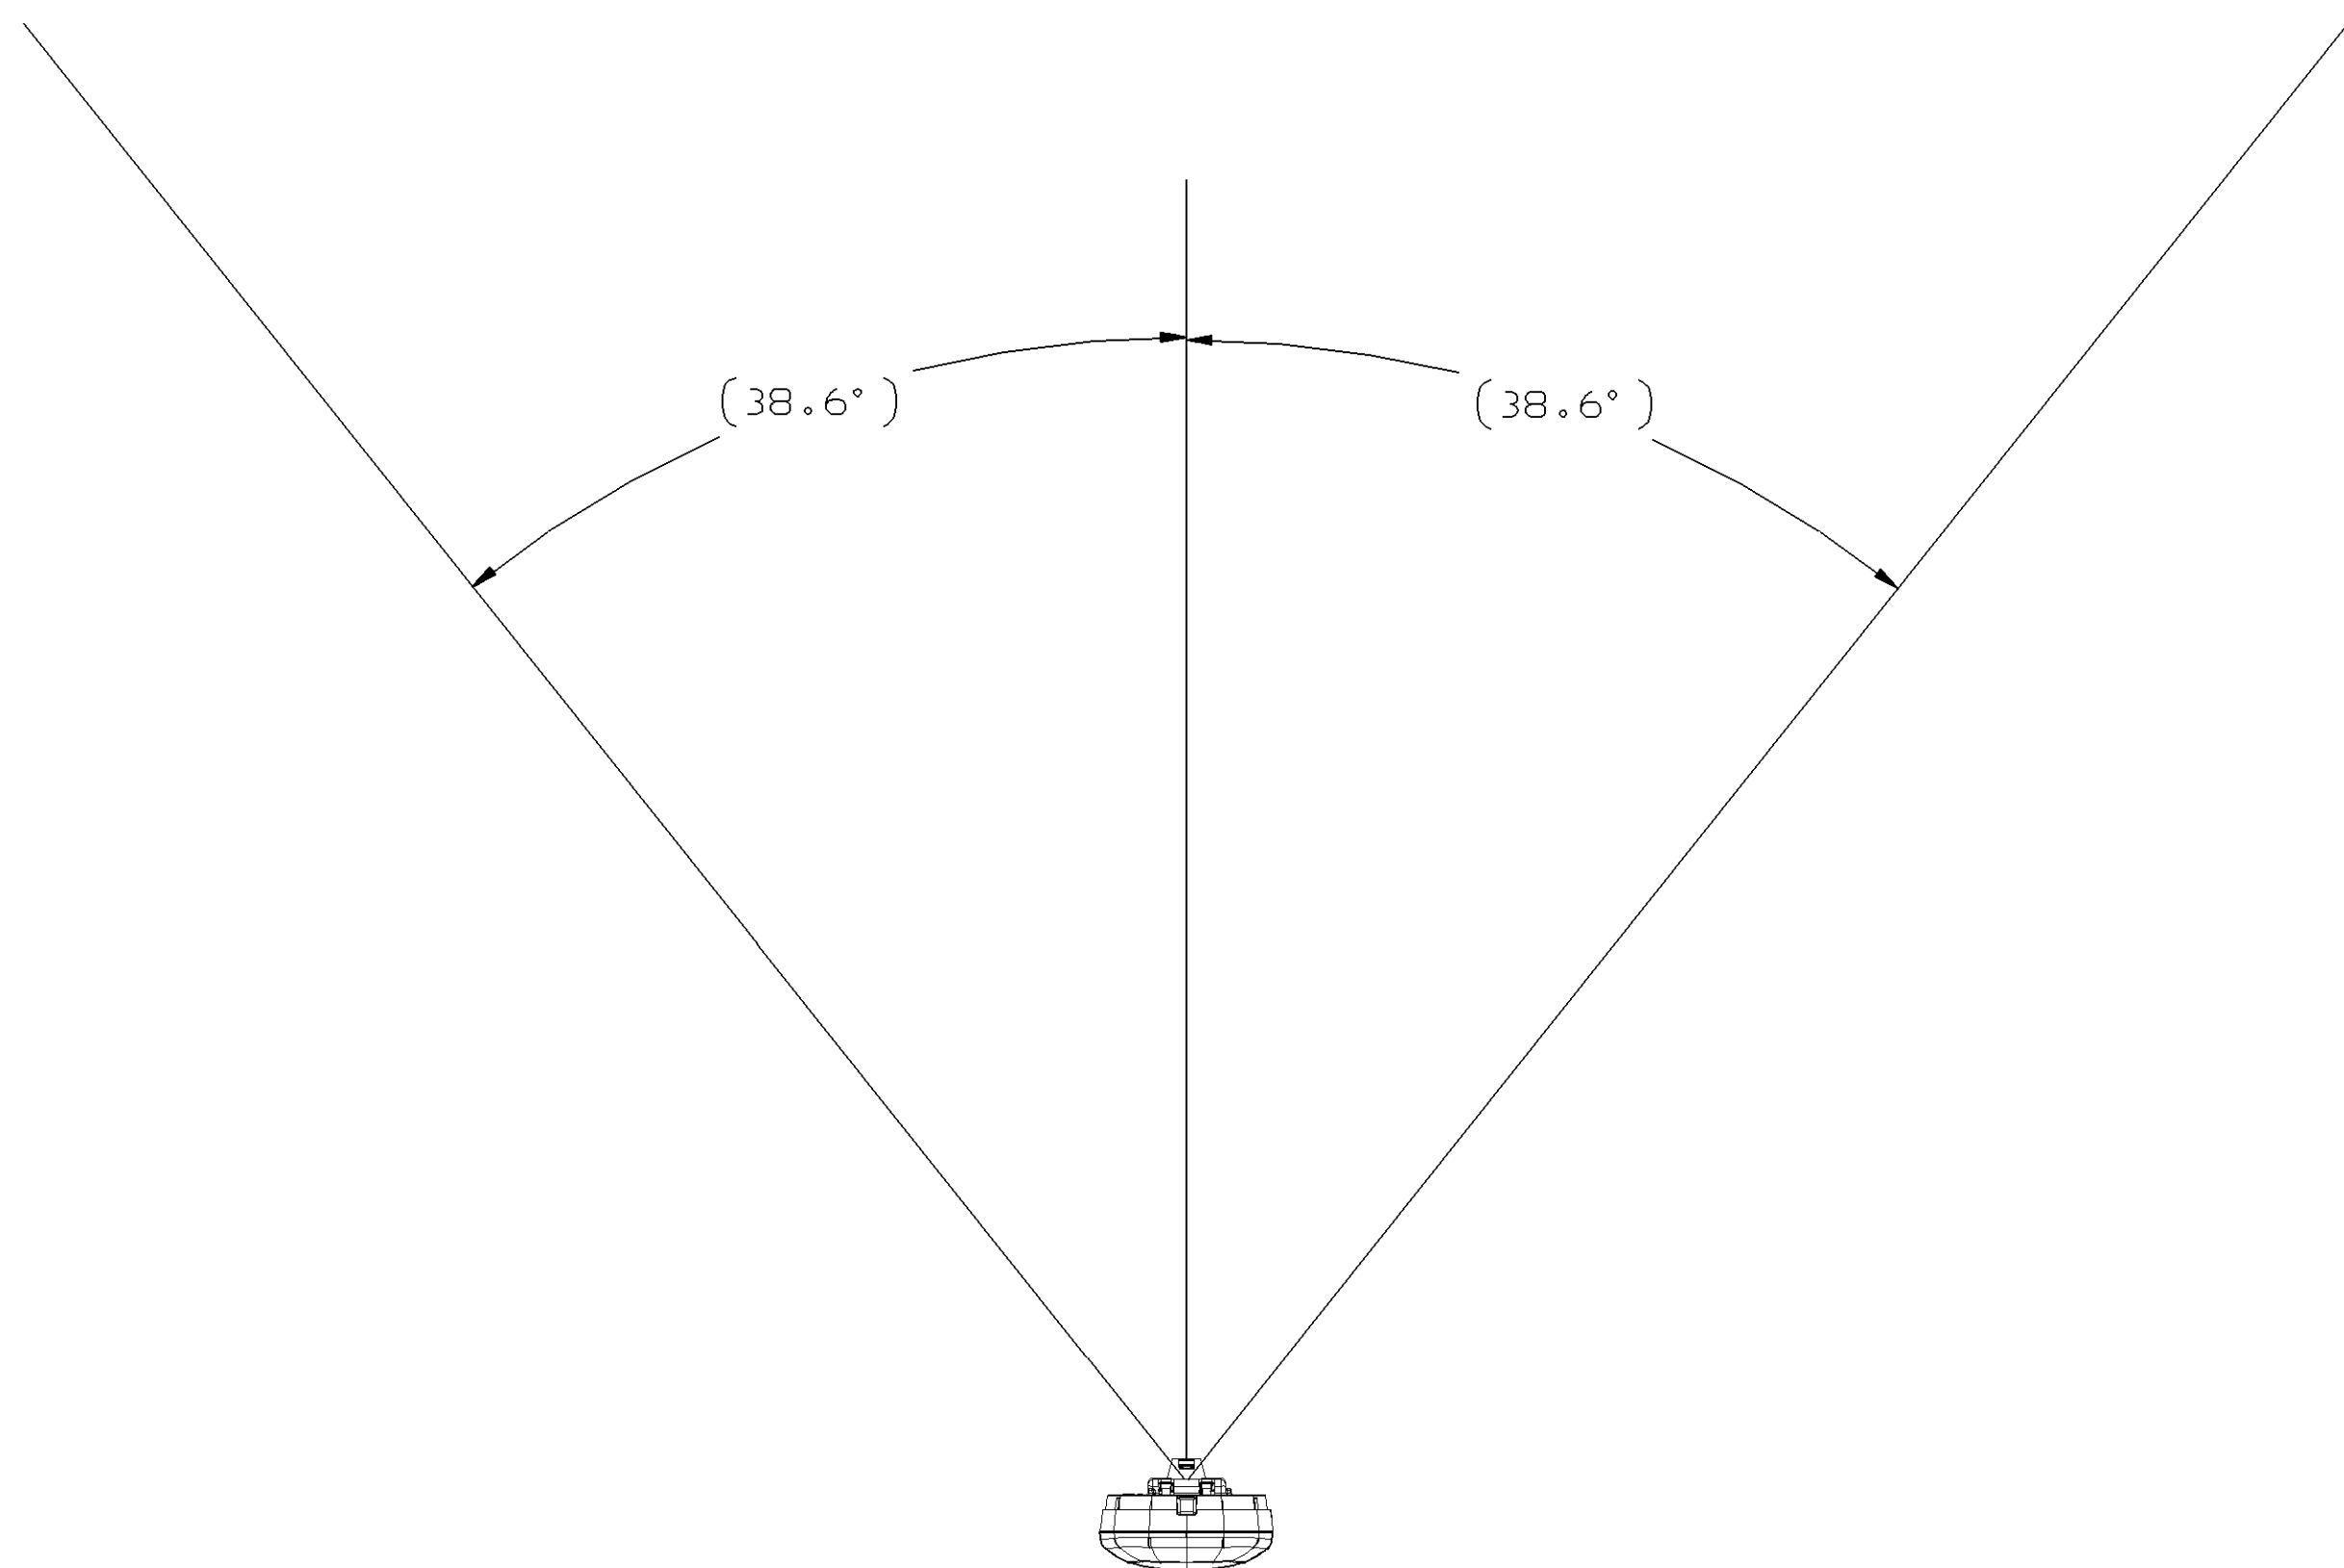


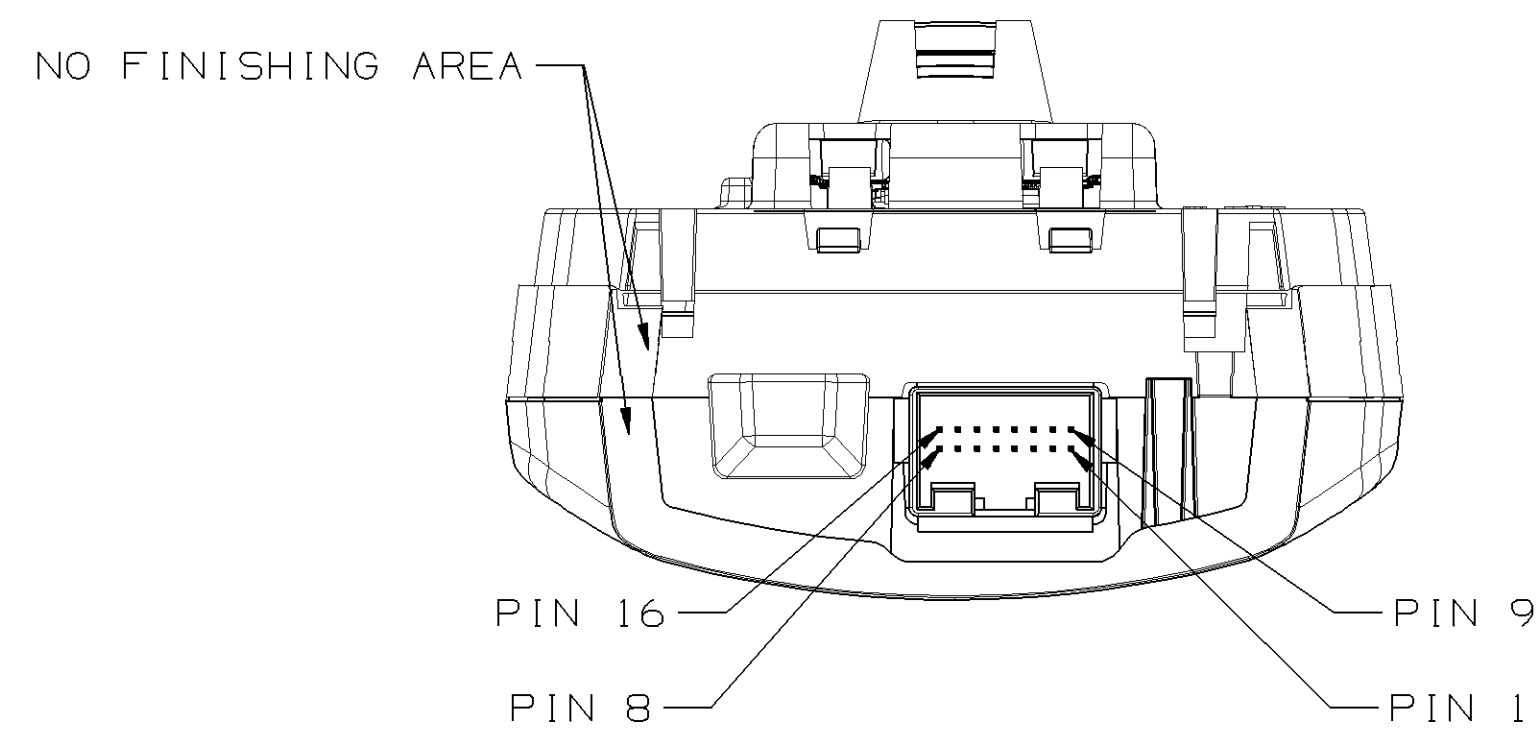

SIDE FIELD OF VIEW
SCALE 1:5

Pin No.	Description
1	BATT
2	GND
3	IGN.
4	VEHCANH
5	VEHCANL
6	PRVCANH
7	PRVCANL
8	SWITCH INPUT
9	LEFT TURN
10	RIGHT TURN
11	WARNING LAMP
12	RADIOMUTE/ENABLE LAMP
13	LEFT AUDIO_P
14	LEFT AUDIO_N/LEFT HAPTIC
15	RIGHT AUDIO_P
16	RIGHT AUDIO_N/RIGHT HAPTIC

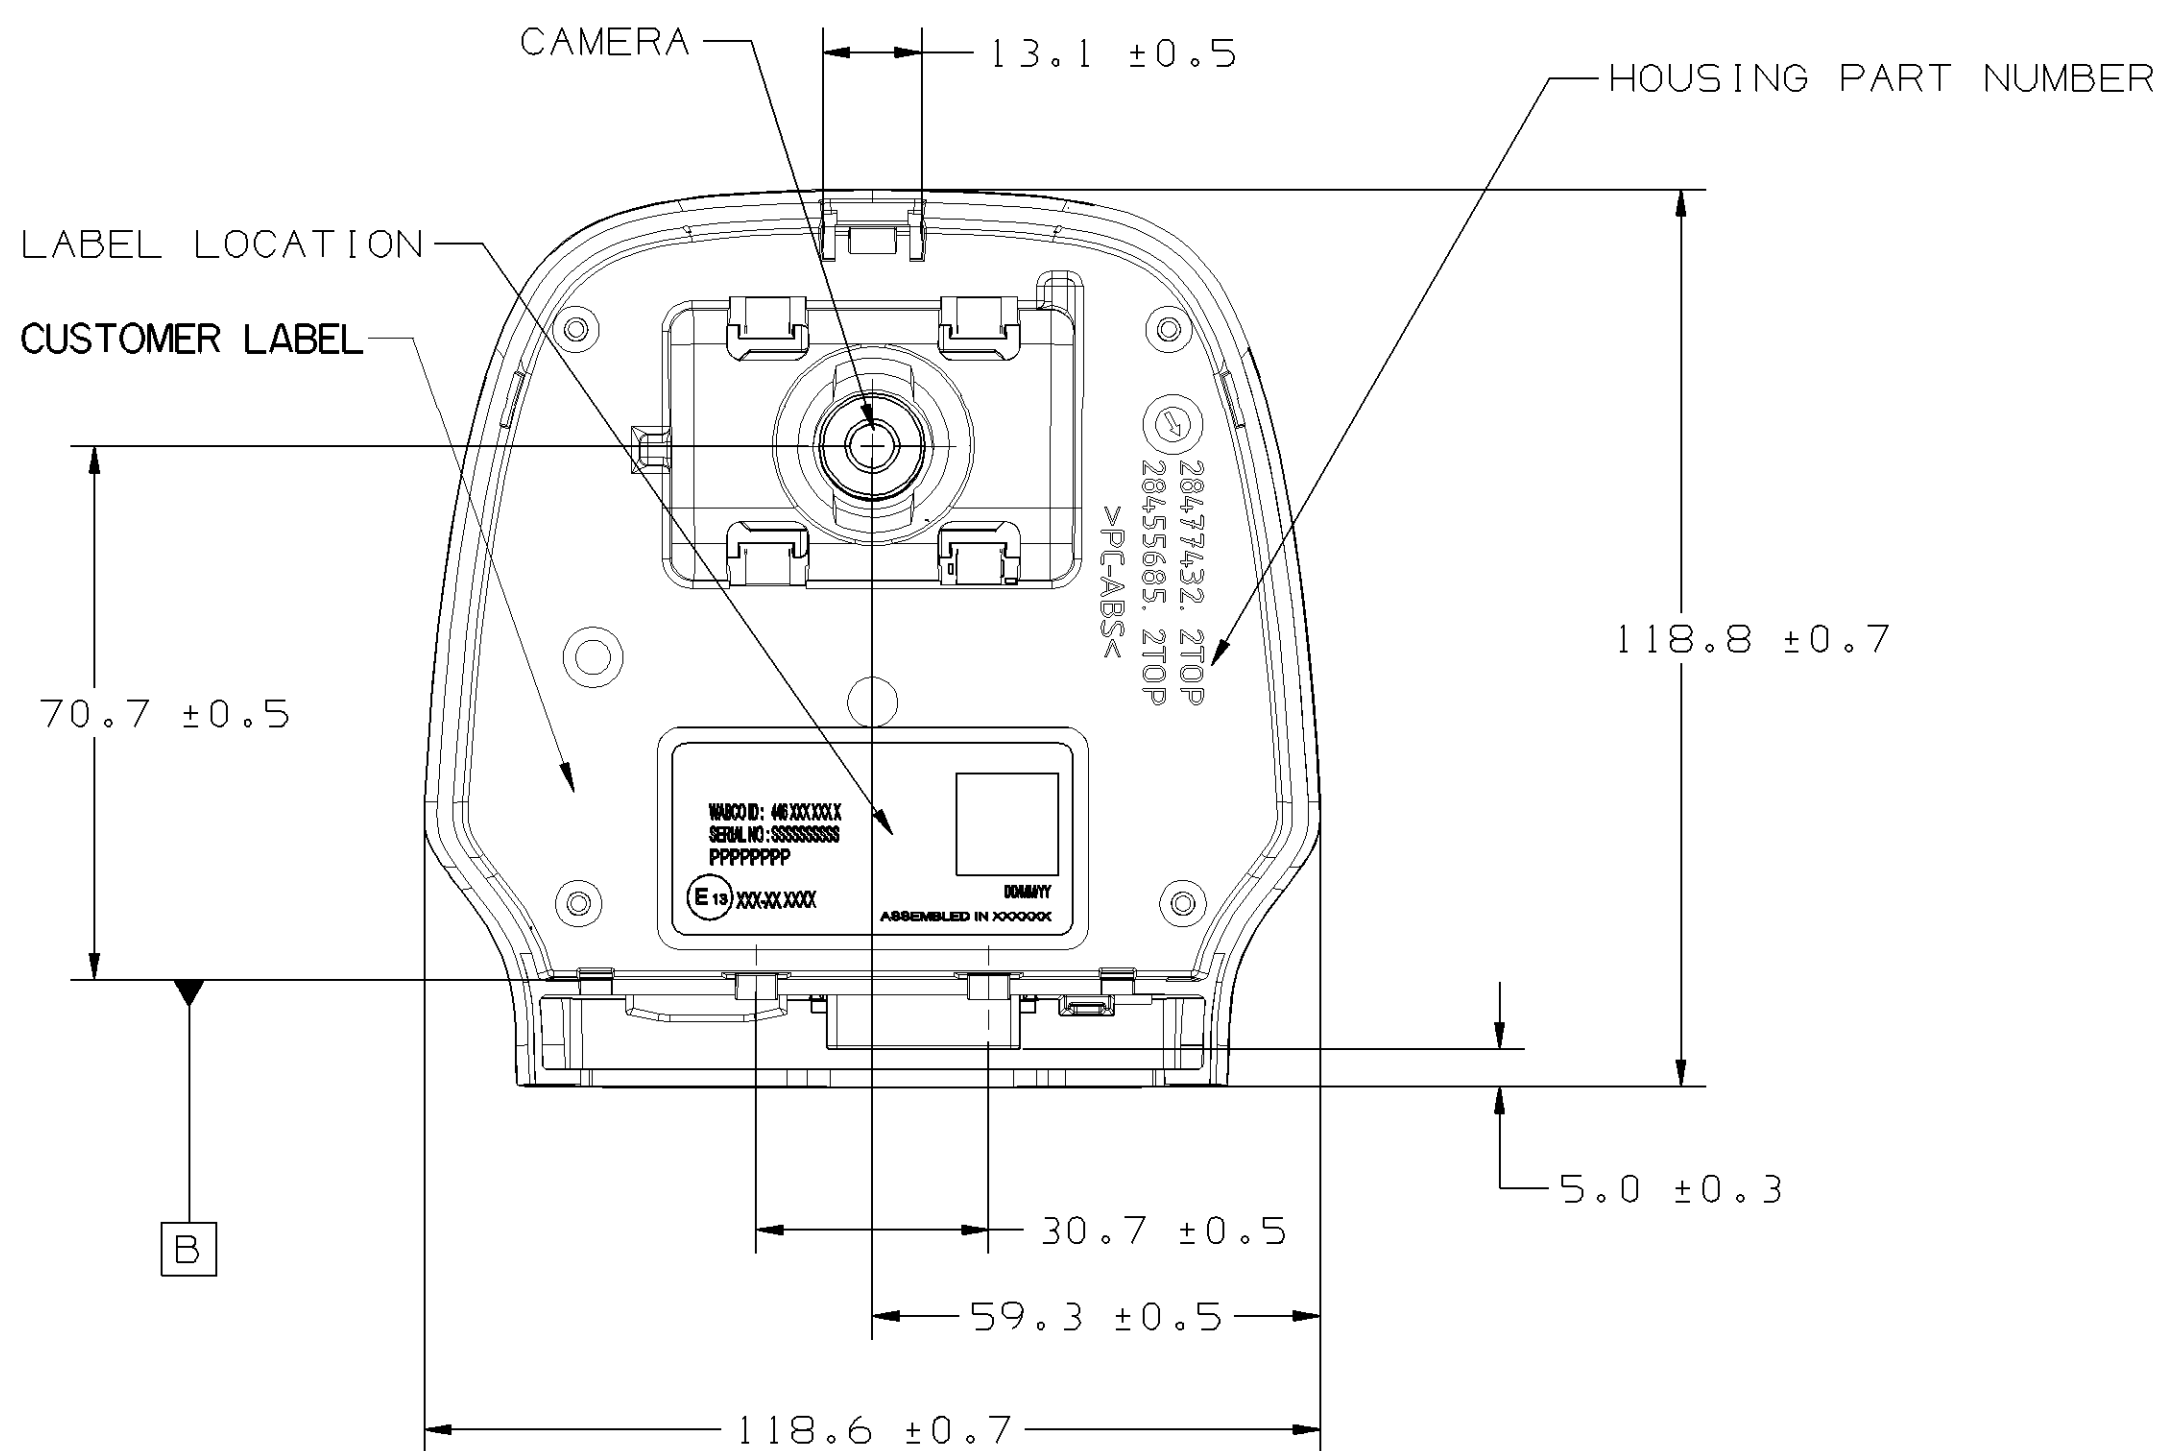

TOP FIELD OF VIEW
SCALE 1:5

NOTES:

ALL DIMENSIONS ARE IN MM
FOR REFERENCE ONLY. THE RECOMMENDED MATING CONNECTOR IS COMPOSED OF THE FOLLOWING
TE CONNECTIVITY TERMINAL POSITION ASSURANCE P/N 1534101-1
TE CONNECTIVITY HOUSING: TE P/N 1-1534097-1 OR EQUIVALENT
TE CONNECTIVITY MICRO QUADLOK TERMINAL (Sn OR Ag) PER DWG C-929454)

SURFACE	0.50 mm ² to 0.75 mm ²	to 0.25 mm ² to 0.50 mm ²
Ag	5-963715-6	5-928999-6
Sn	5-963715-1	5-928999-1

PARTS SHALL BE FREE OF MOLD RELEASE, DIRT, GREASE, OIL, SALT RESIDUE, DETERGENTS AND OTHER PROCESSING CHEMICALS, FLASH, SINK, VOIDS, NICKS, SCRATCHES, TOOL MARKS, METAL FLAKES >0.13 MM AND OTHER GENERAL CONTAMINANTS AND IMPERFECTIONS THAT MAY BE DETRIMENTAL TO PART FIT OR FUNCTION. (PERMISSIBLE: <6 METAL FLAKES <0.13 MM ON INTERIOR SURFACES)
MASS : 180 ± 25 GRAMS
INSERTION FORCE-MODULE TO BRACKET: 50 N ± 10N

10R-0413435

CAMERA SHALL BE INSTALLED WITH THE CONNECTOR FACING UP IN THE TOP SECTION OF THE WINDSHIELD.
CAMEA INSTALLATION POSITION HAS TO BE PARAMETERIZED AFTER INSTALLATION.
CAMERA SHALL BE INSTALLED WITHIN THE WIPED AREA OF THE WINDSHIELD IN THE DRIVING DIRECTION.
REFER TO WABCO PRODUCT SPECIFICATION FOR ALIGNMENT PROCEDURE AFTER INSTALLATION.
PLASTIC PARTS TO BE MADE OF CYCOLOY LG 9000 76701
SURFACE TEXTURE MOLD TECH MT11030 TO BE APPLIED ON VISIBLE SURFACES.
SURFACE WITH TEXTURE GLOSS LEVEL 3.0 ± 0.5
SOFTWARE VERSION ACCORDING TO CCT (DOC 91)
CUSTOMER LABEL ACCORDING TO 4460700260.922 SPECIFICATION
VOLTAGE RATINGS --> 9V TO 32V
CURRENT CONSUMPTION IS TYPICALLY 0.5A @ 24V

General Specifications: 446-554-1, Size ISO 14400 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2018-04-18		Signature: Kiylo	
Doc. Code: 10R-0413435		Sheet: 1		To: OnLane2 - 2 deg Camera	
General Tolerances: 446-261		2018-04-18		Kiylo	
Range of Nominal Dimensions (± mm)		Expert: Pining		Medial No.:	
Class	to ± 50	to ± 180	to ± 400	to ± 400	Date of first issue: 2018-04-18
Fine	0.5	1.0	1.5	2.0	Doc. Code: 005
Medium	1.0	2.0	3.0	4.0	Language: EN
Coarse	2.0	3.5	5.0	6.5	Sheet: 1/1
Tapped holes acc.:		SEE NOTE 1:1		Revision: 6834	
A 0 CREO		EDP file:		Revision: 6834	
Tolerance Class Applied: 446-261		Tolerance Class Applied: 446-261		Replacement for:	