

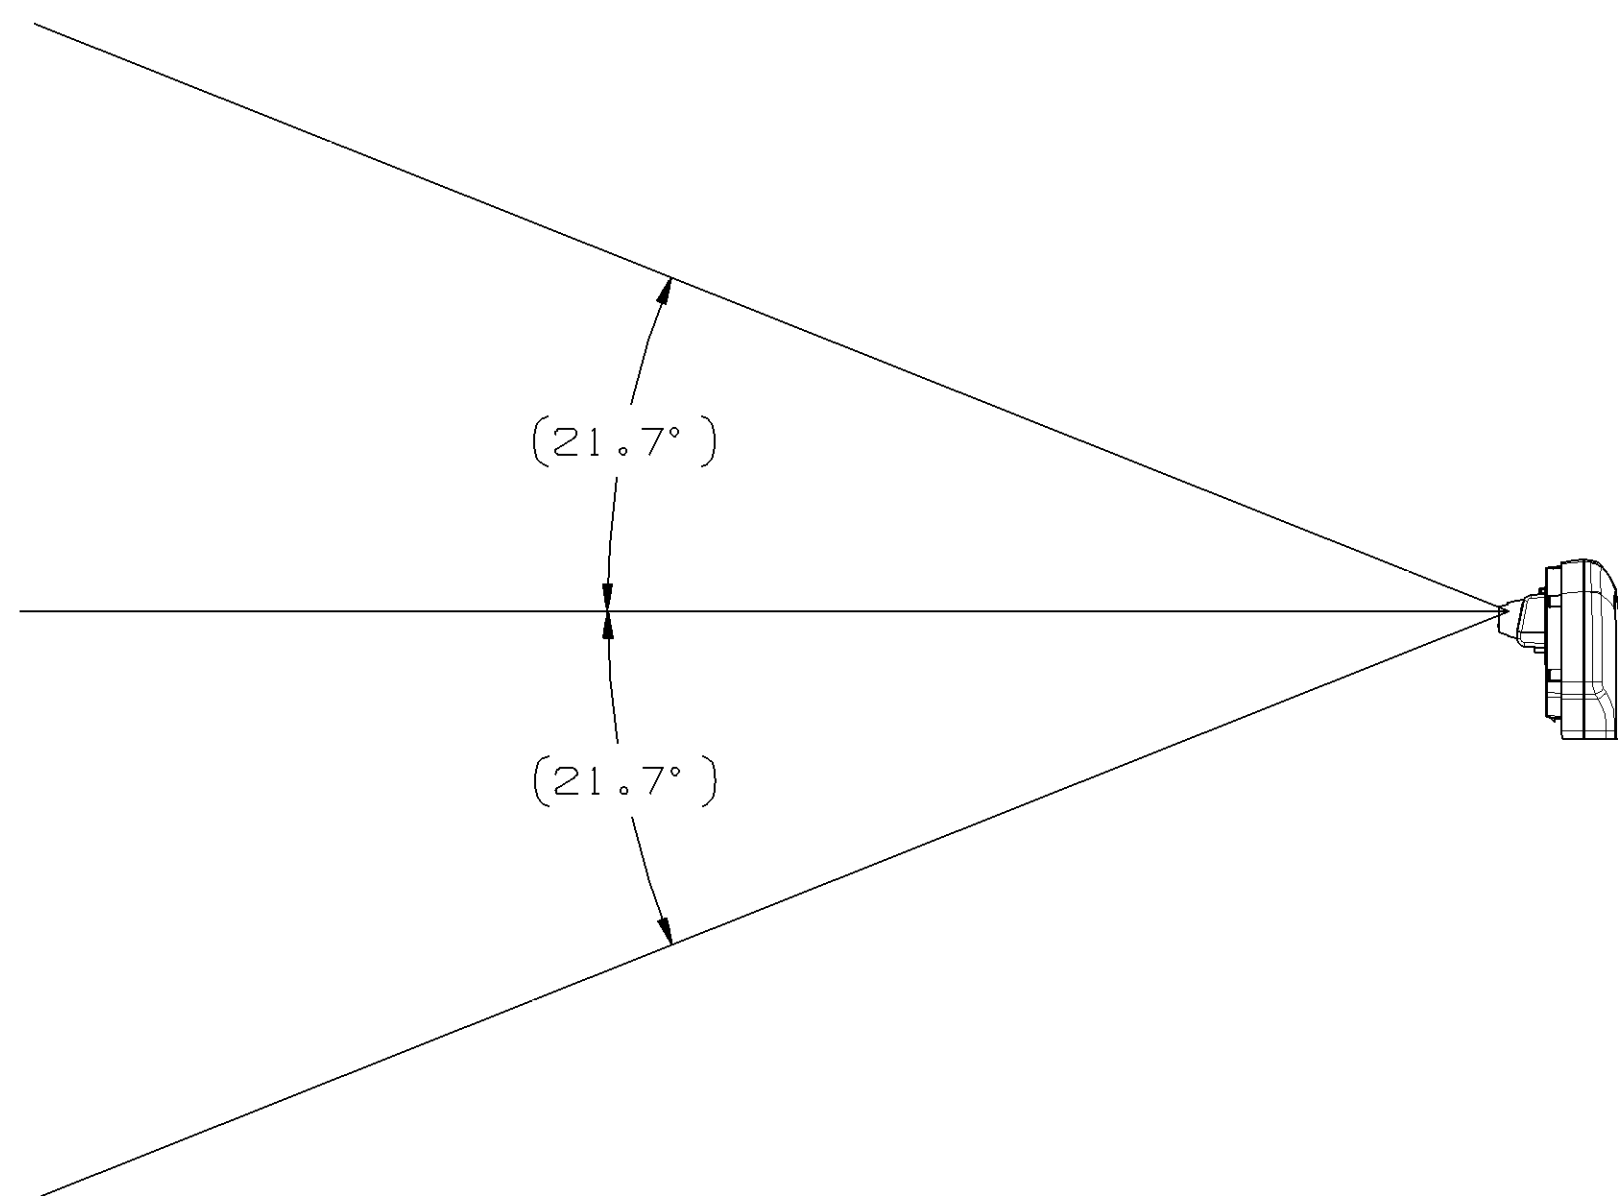
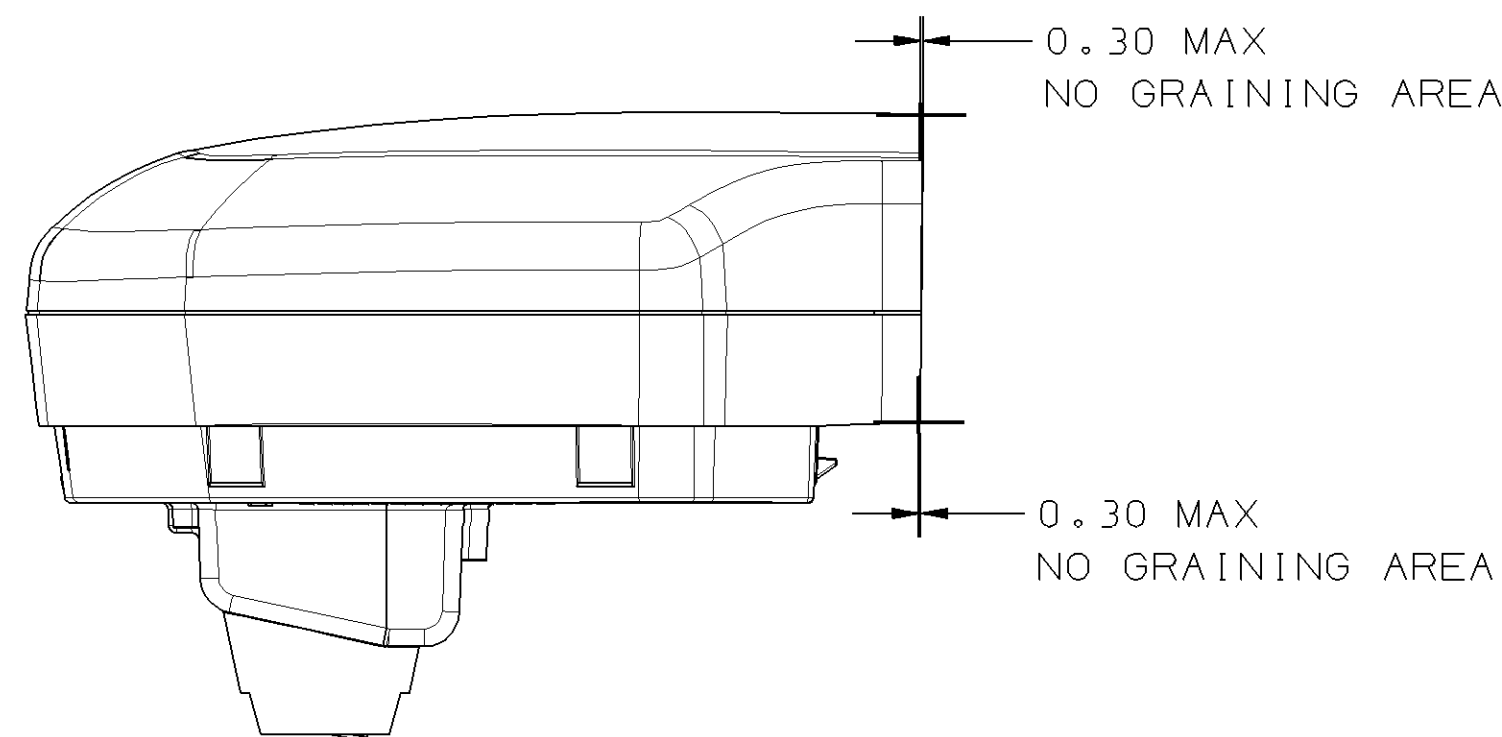
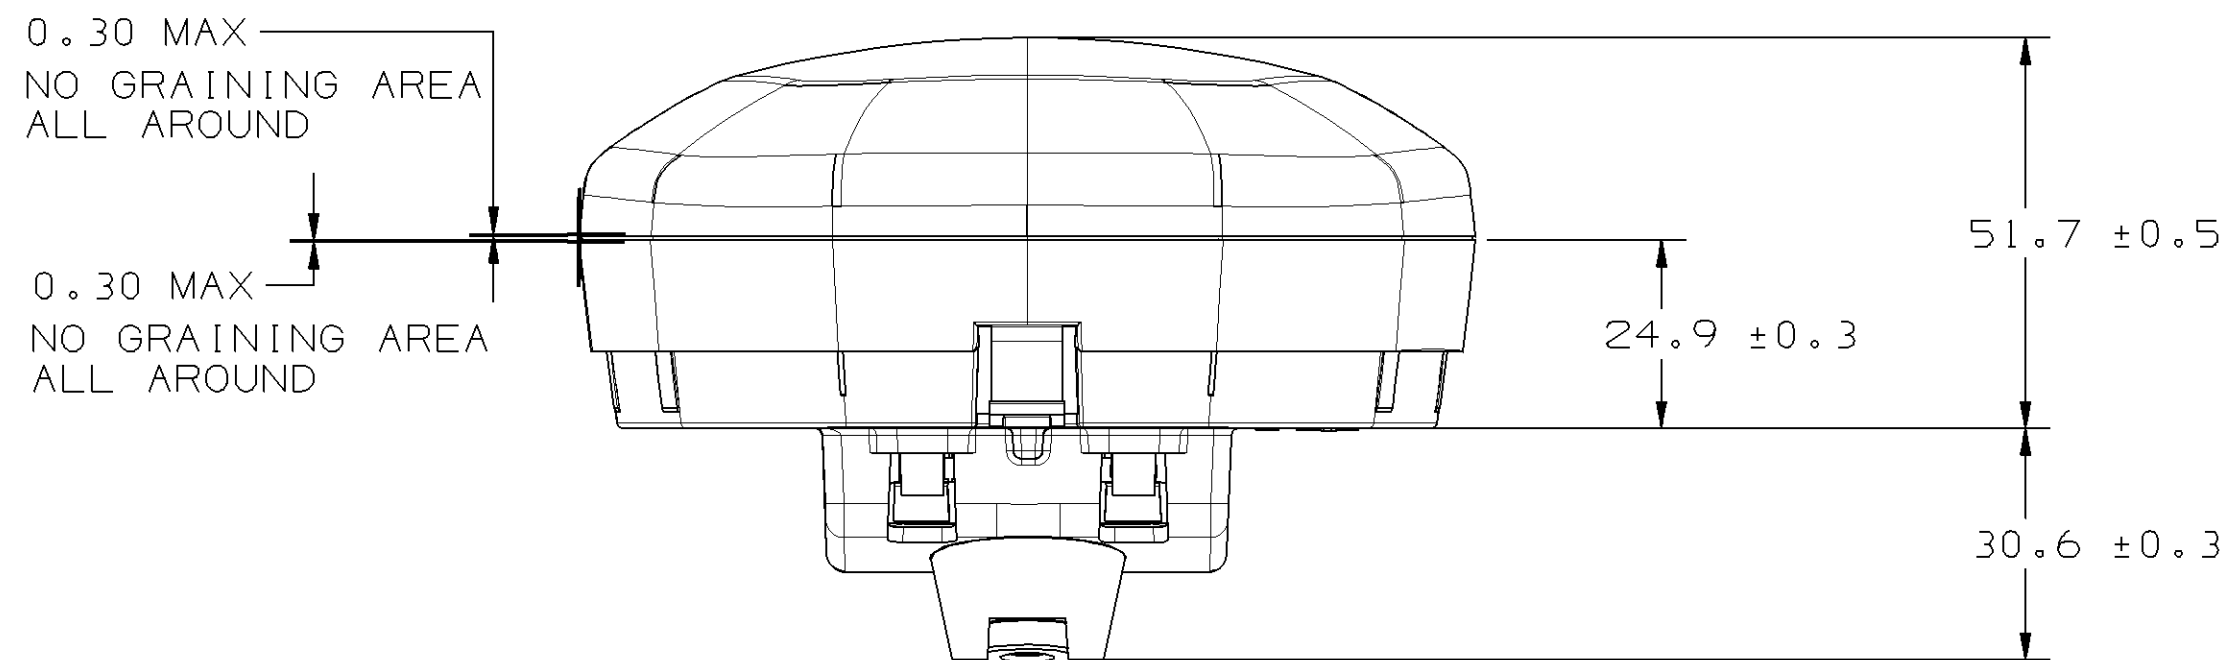
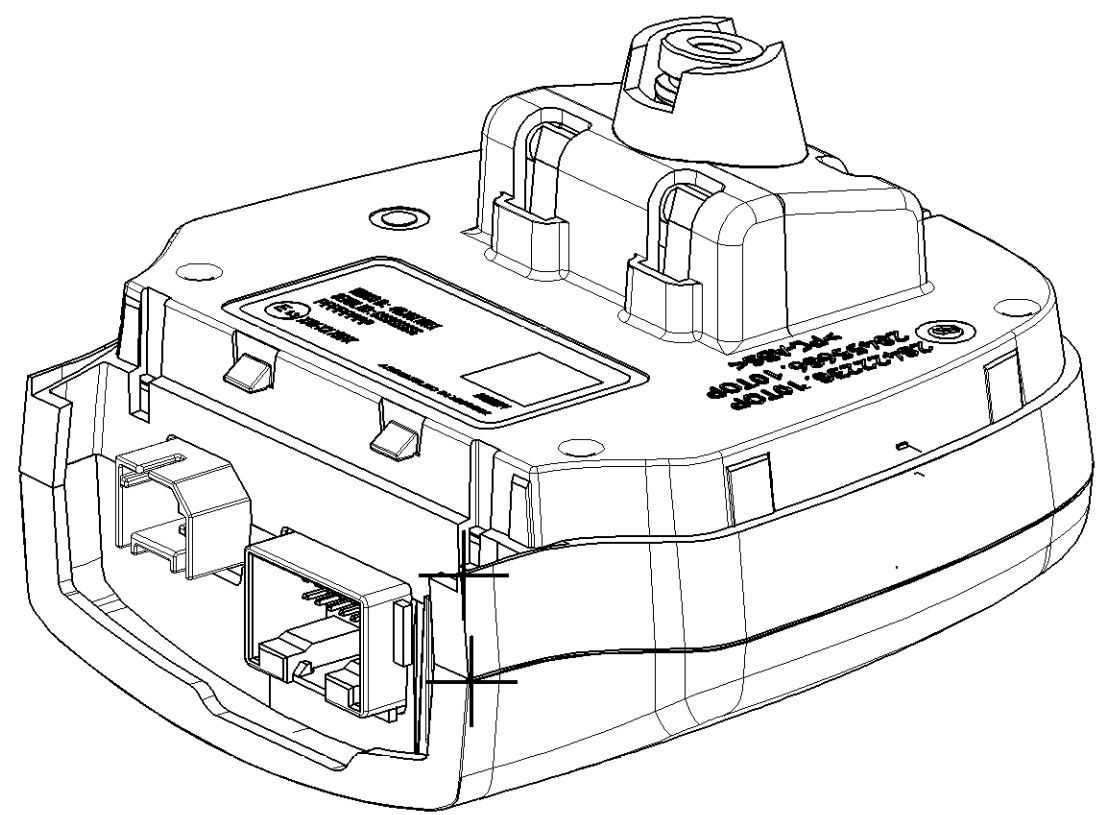
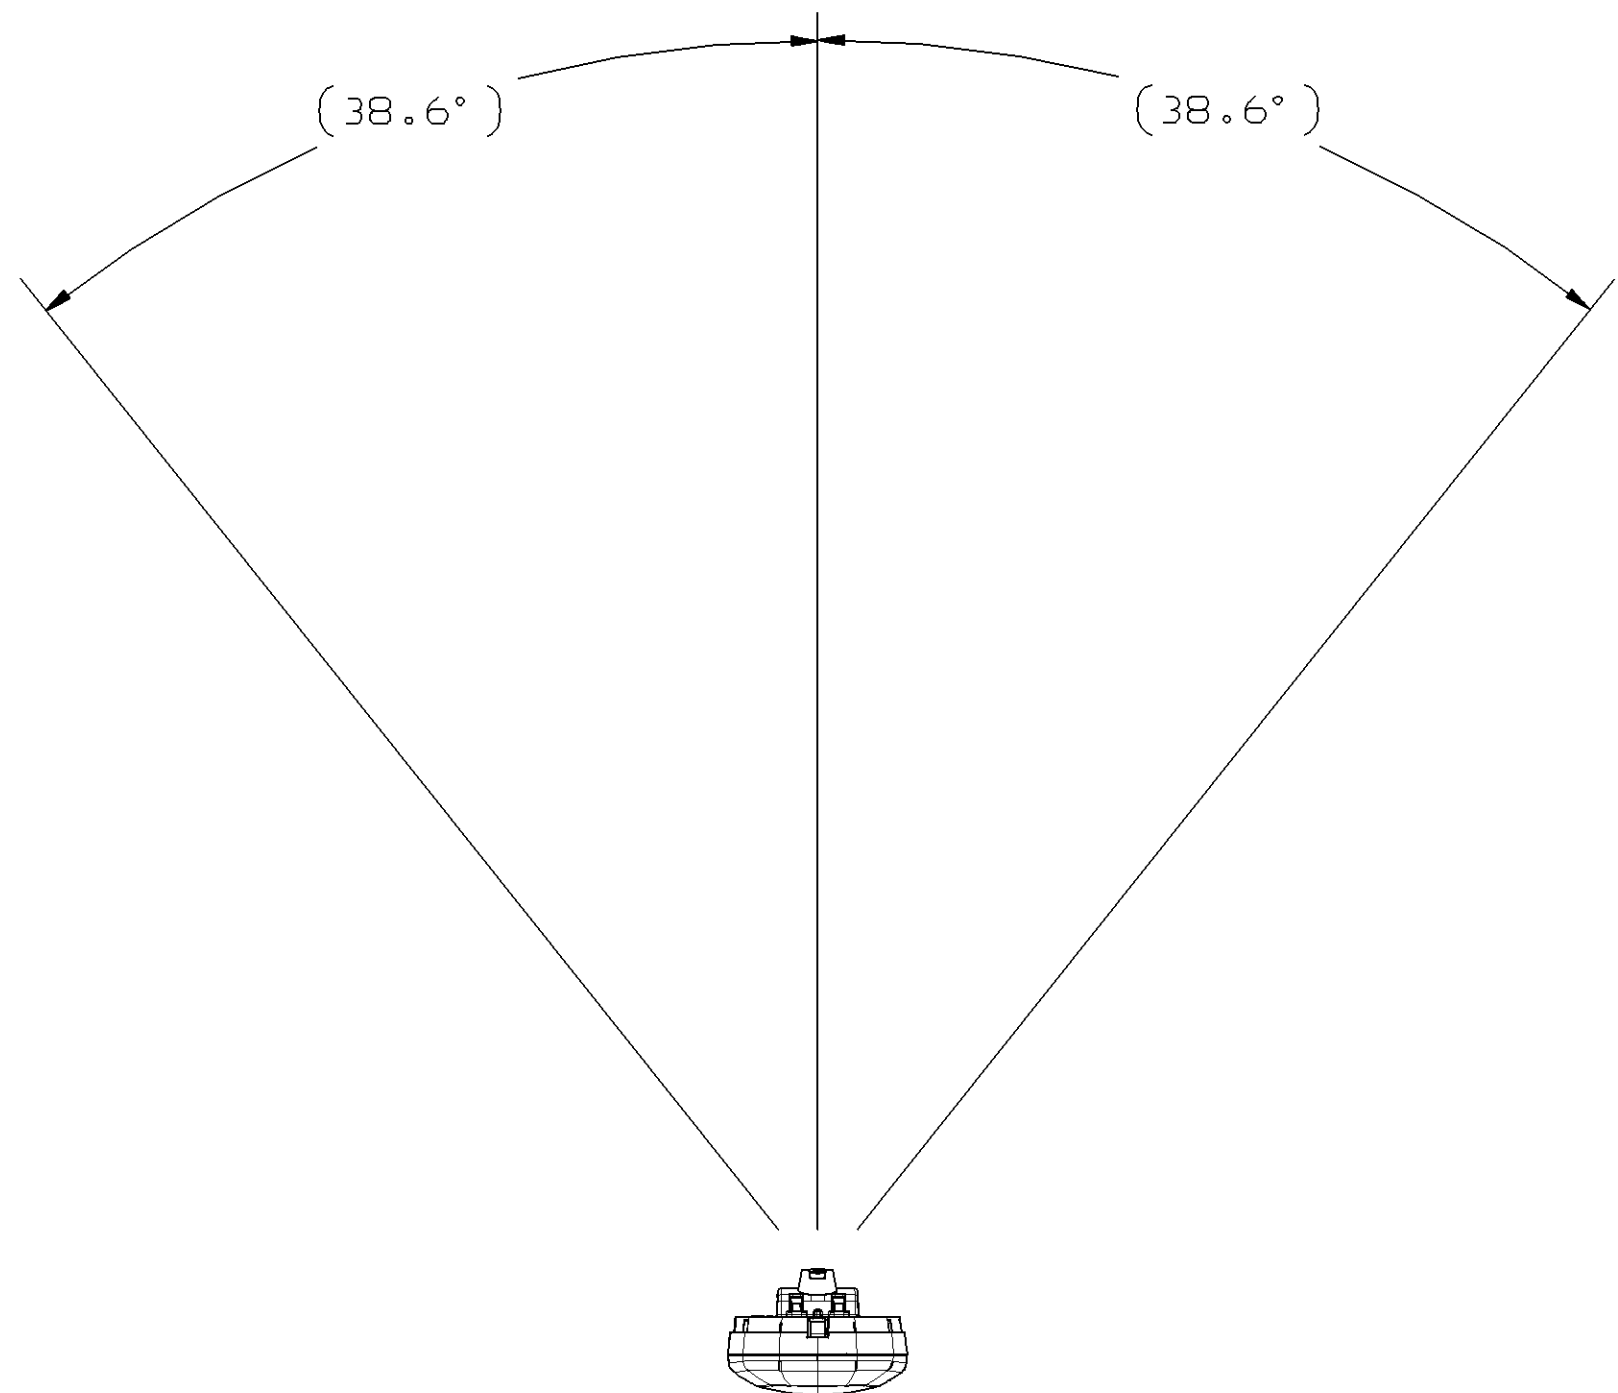


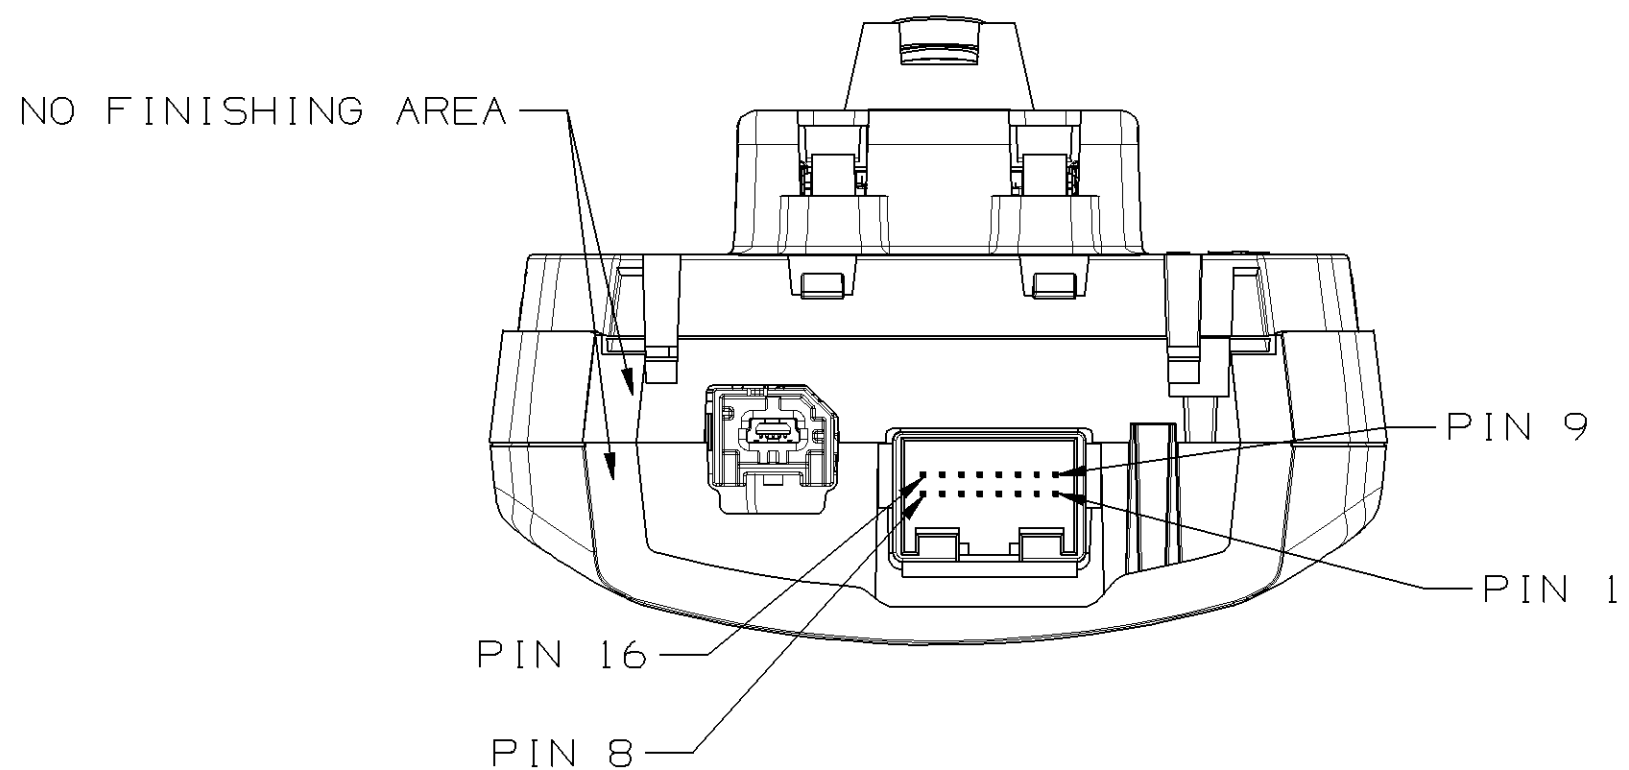

Pin No.	Description
1	BATT
2	GND
3	IGN.
4	VEHCANH
5	VEHCANL
6	PRVCANH
7	PRVCANL
8	SWITCH INPUT
9	LEFT TURN
10	RIGHT TURN
11	WARNING LAMP
12	RADIOMUTE/ENABLE LAMP
13	LEFT AUDIO_P
14	LEFT AUDIO_N/LEFT HAPTIC
15	RIGHT AUDIO_P
16	RIGHT AUDIO_N/RIGHT HAPTIC

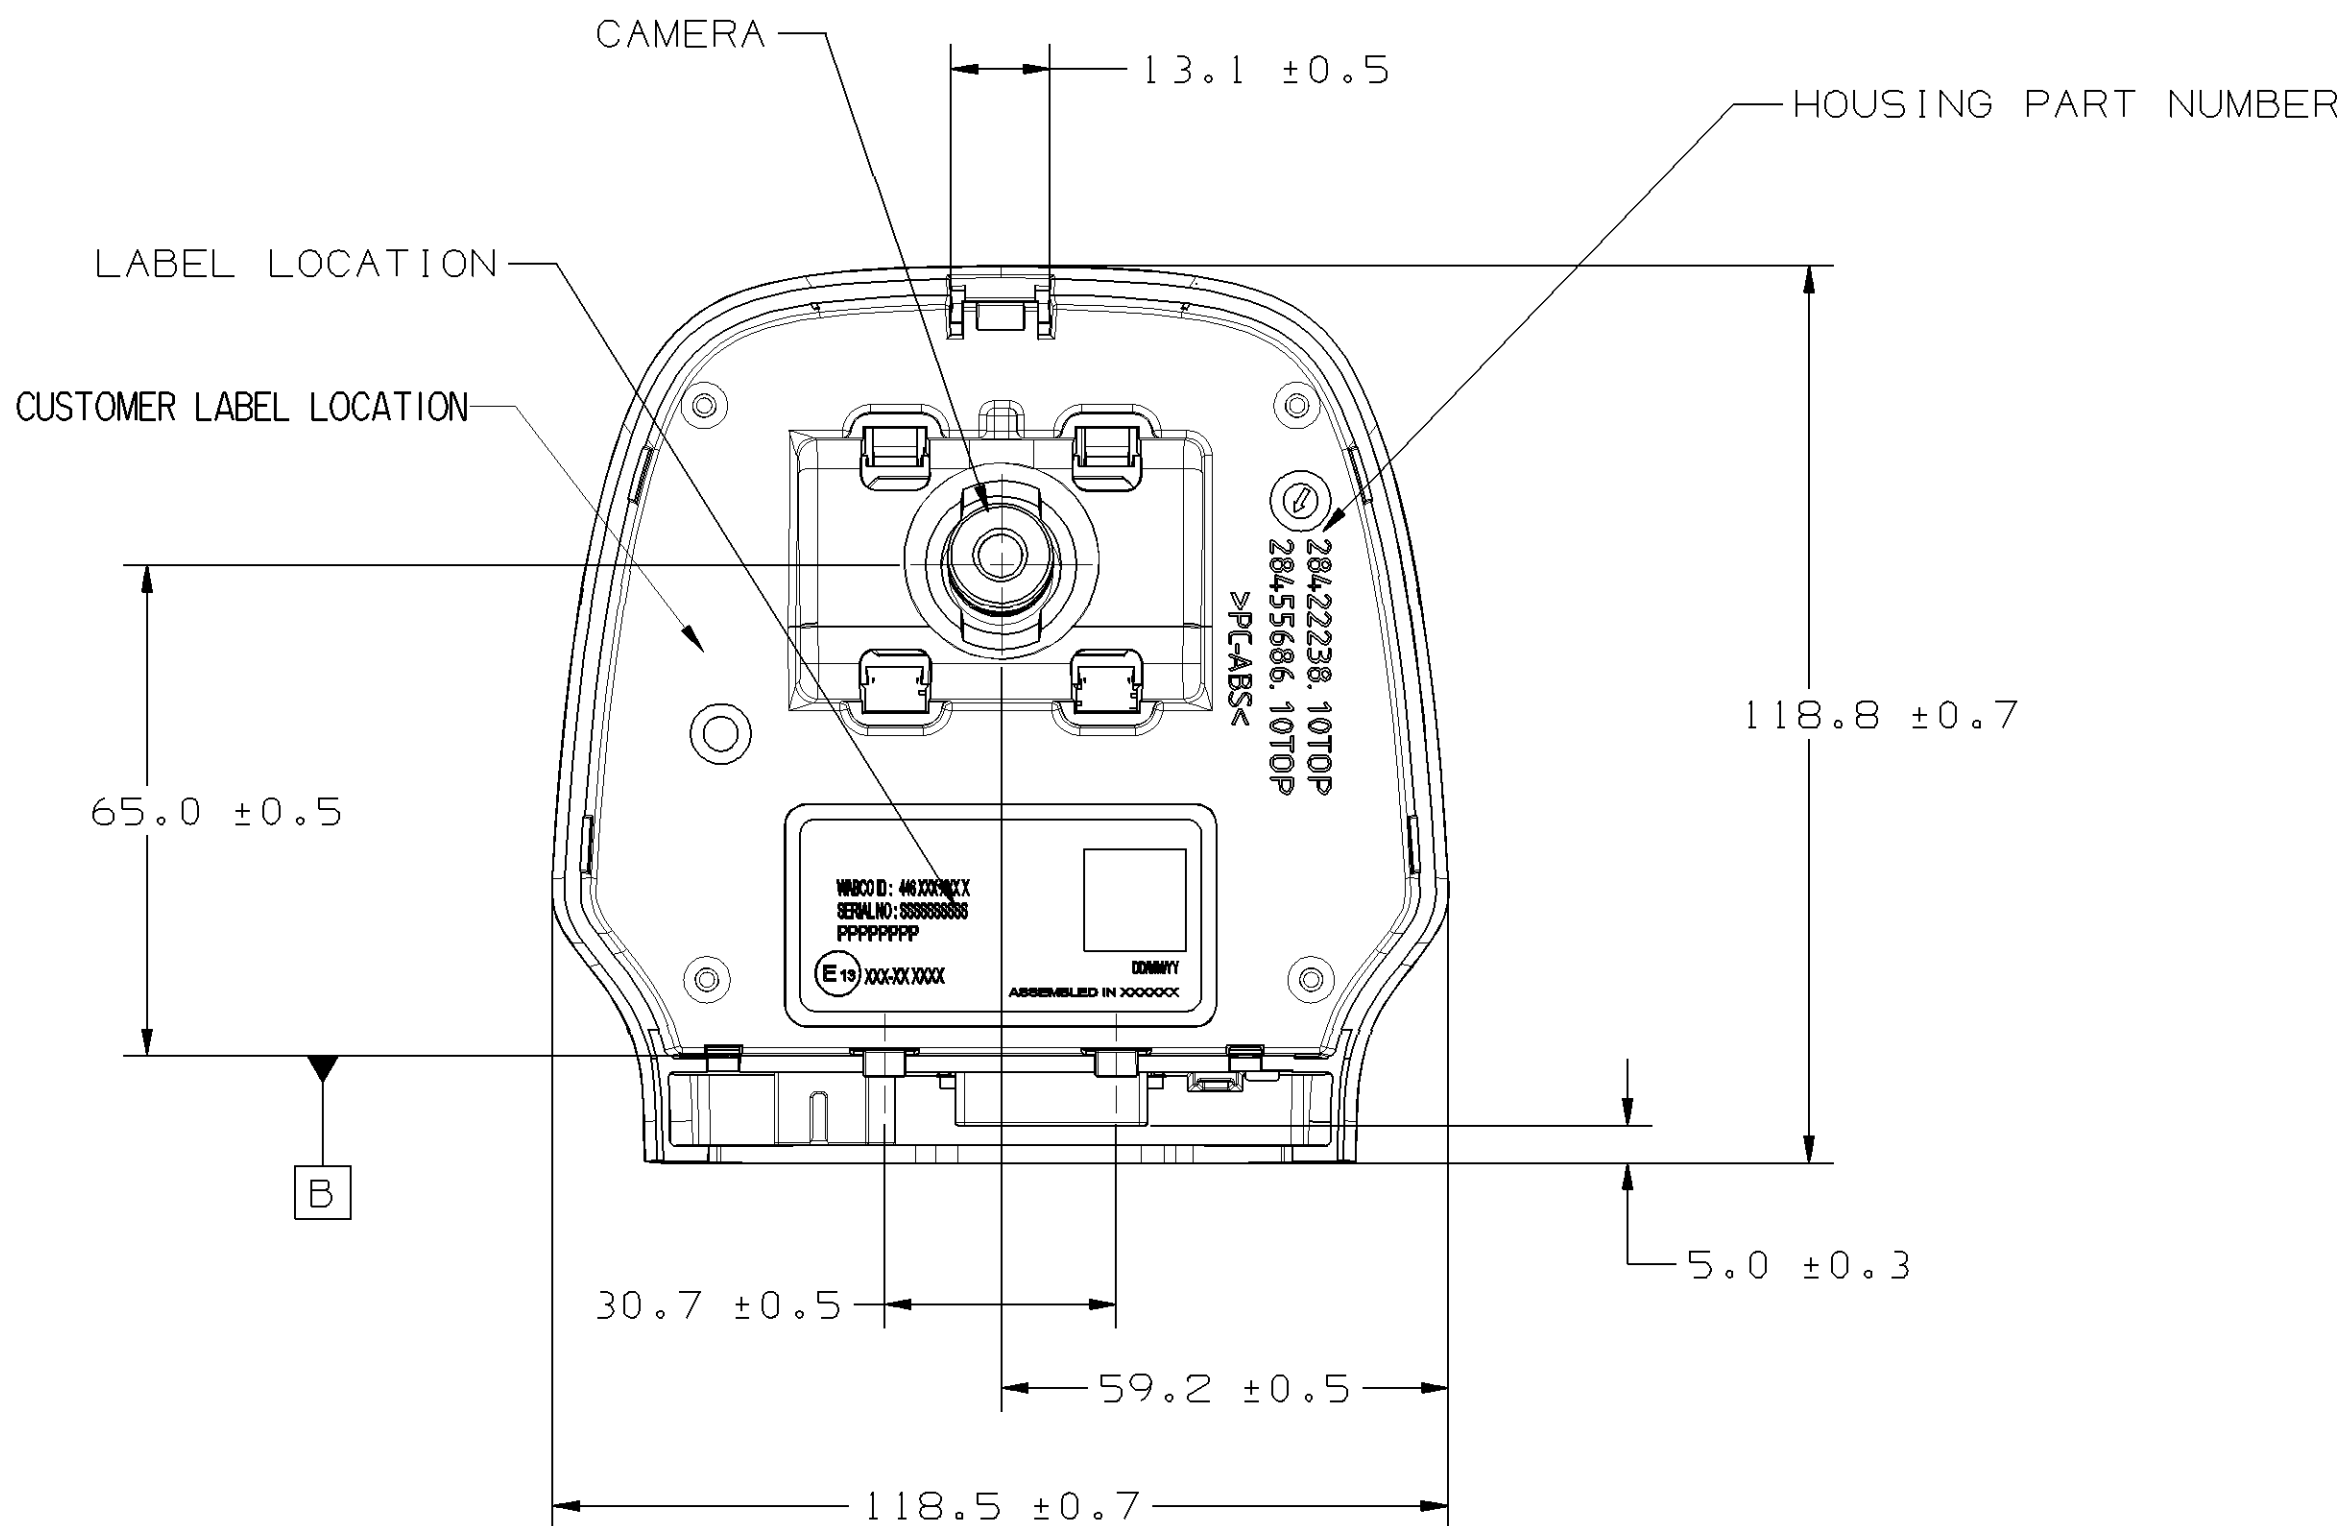

NOTES:

ALL DIMENSIONS ARE IN MM
FOR REFERENCE ONLY, THE RECOMMENDED MATING CONNECTOR IS COMPOSED OF THE FOLLOWING
TE CONNECTIVITY TERMINAL POSITION ASSURANCE P/N 1534101-1
TE CONNECTIVITY HOUSING: TE P/N 1-1534097-1 OR EQUIVALENT
TE CONNECTIVITY MICRO QUADLOK TERMINAL (Sn OR Ag)PER DWG C-929454)

SURFACE	0.50 mm ² to 0.75 mm ²	0.25mm ² to 0.50 mm ²
Ag	5-963715-6	5-928999-6
Sn	5-963715-1	5-928999-1

PARTS SHALL BE FREE OF MOLD RELEASE, DIRT, GREASE, OIL, SALT RESIDUE, DETERGENTS AND OTHER PROCESSING CHEMICALS, FLASH, SINK, VOIDS, NICKS, SCRATCHES, TOOL MARKS, METAL FLAKES >0.13 MM AND OTHER GENERAL CONTAMINANTS AND IMPERFECTIONS THAT MAY BE DETRIMENTAL TO PART FIT OR FUNCTION. (PERMISSIBLE: <6 METAL FLAKES <0.13 MM ON INTERIOR SURFACES)
MASS : 180± 25 GRAMS
INSERTION FORCE-MODULE TO BRACKET: 50N ±10N

E1310R-0413435

CAMERA SHALL BE INSTALLED WITH THE CONNECTOR FACING UP IN THE TOP SECTION OF THE WINDSHIELD.

CAMEA INSTALLATION POSITION HAS TO BE PARAMETERIZED AFTER INSTALLATION.

CAMERA SHALL BE INSTALLED WITHIN THE WIPED AREA OF THE WINDSHIELD IN THE DRIVING DIRECTION.

REFER TO WABCO PRODUCT SPECIFICATION FOR ALIGNMENT PROCEDURE AFTER INSTALLATION.

PLASTIC PARTS TO BE MADE OF CYCOLOY LG 9000 76701

SURFACE TEXTURE MOLD TECH MT11030 TO BE APPLIED ON VISIBLE SURFACES.
SURFACE WITH TEXTURE GLOSS LEVEL 3.0±0.5

SOFTWARE VERSION ACCORDING TO CCT (DOC 91)

CUSTOMER LABEL ACCORDING TO 4460704020-922 SPECIFICATION

VOLTAGE RATINGS --> 9V TO 32V

CURRENT CONSUMPTION IS TYPICALLY 0.3A @ 12V

General Specifications: 446-554-1, Size ISO 14405 LP				Copyright WABCO®		WABCO							
Further Technical Data:				Date:	Signature:	OnLane2 10 deg Top Mount Camera with LVDS							
Doc. Code:	Sheet:	To:		2016-10-27	Corcoran								
General Tolerances: 446-261				2016-10-27	Parody								
Range of Nominal Dimensions (± mm)													
Class	to	± 50	± 180	± 400	± 400								
Fine	0.5	1.0	1.5	2.0									
Medium	X 1.0	2.0	3.0	4.0	±3°								
Coarse	2.0	3.5	5.0	6.5									
Tapped Holes acc.:													
Tolerance Class Applied: Unspecified													
				SEE NOTE	1:1								
				A 0	CREO								
				Model No.		Date of first issue:		2016-10-27					
				446 070 402 0		Doc. Code		Language					
				005		EN		1/1					
				Revision		Tolerance		Replacement for					
				6834									