



TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION DE SON CONTENU, SONT INTERDITES, SAUF AUTORISATION EXPRESSE. TOUT MANÈGE À L'ÉGARD DE CE DOCUMENT QUI PORTE PRÉJUDICE AUX DROITS DE PROPRIÉTÉ INDUSTRIELLE RÉSERVÉS, NOTAMMENT EN MATIÈRE DE BREVETS ET DE MODÈLES.
 NON È PERMESSO CONSERVARE A TERZI O RIPRODURRE QUESTO DOCUMENTO, NÉ UTILIZZARNE IL CONTENUTO, O RENDERE LO COMPLETO O IN PARTE, SENZA AUTORIZZAZIONE ESPLÍCITA. OGNI INFRAZIONE COSTITUISCE UN EVIDENTE ABUSO E COMPORTA LA RECAZIONE DEI DANNI SUBITI. È FATTA RISERVA DI TUTTI I DIRITTI DERIVANTI DA BREVETTI O MODELLI.
 IT IS PROHIBITED TO STORE OR REPRODUCE THIS DOCUMENT AND TO USE OR COMMUNICATE ITS CONTENTS WITHOUT EXPRESS AUTHORITY. CONVICTION OF THIS RESTRICTION WILL CONSTITUTE AN EVIDENT ABUSE AND RESULT IN A LIABILITY TO THE PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE VIOLATION OF PATENT OR DESIGN RIGHTS.
 GRANT OF PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.

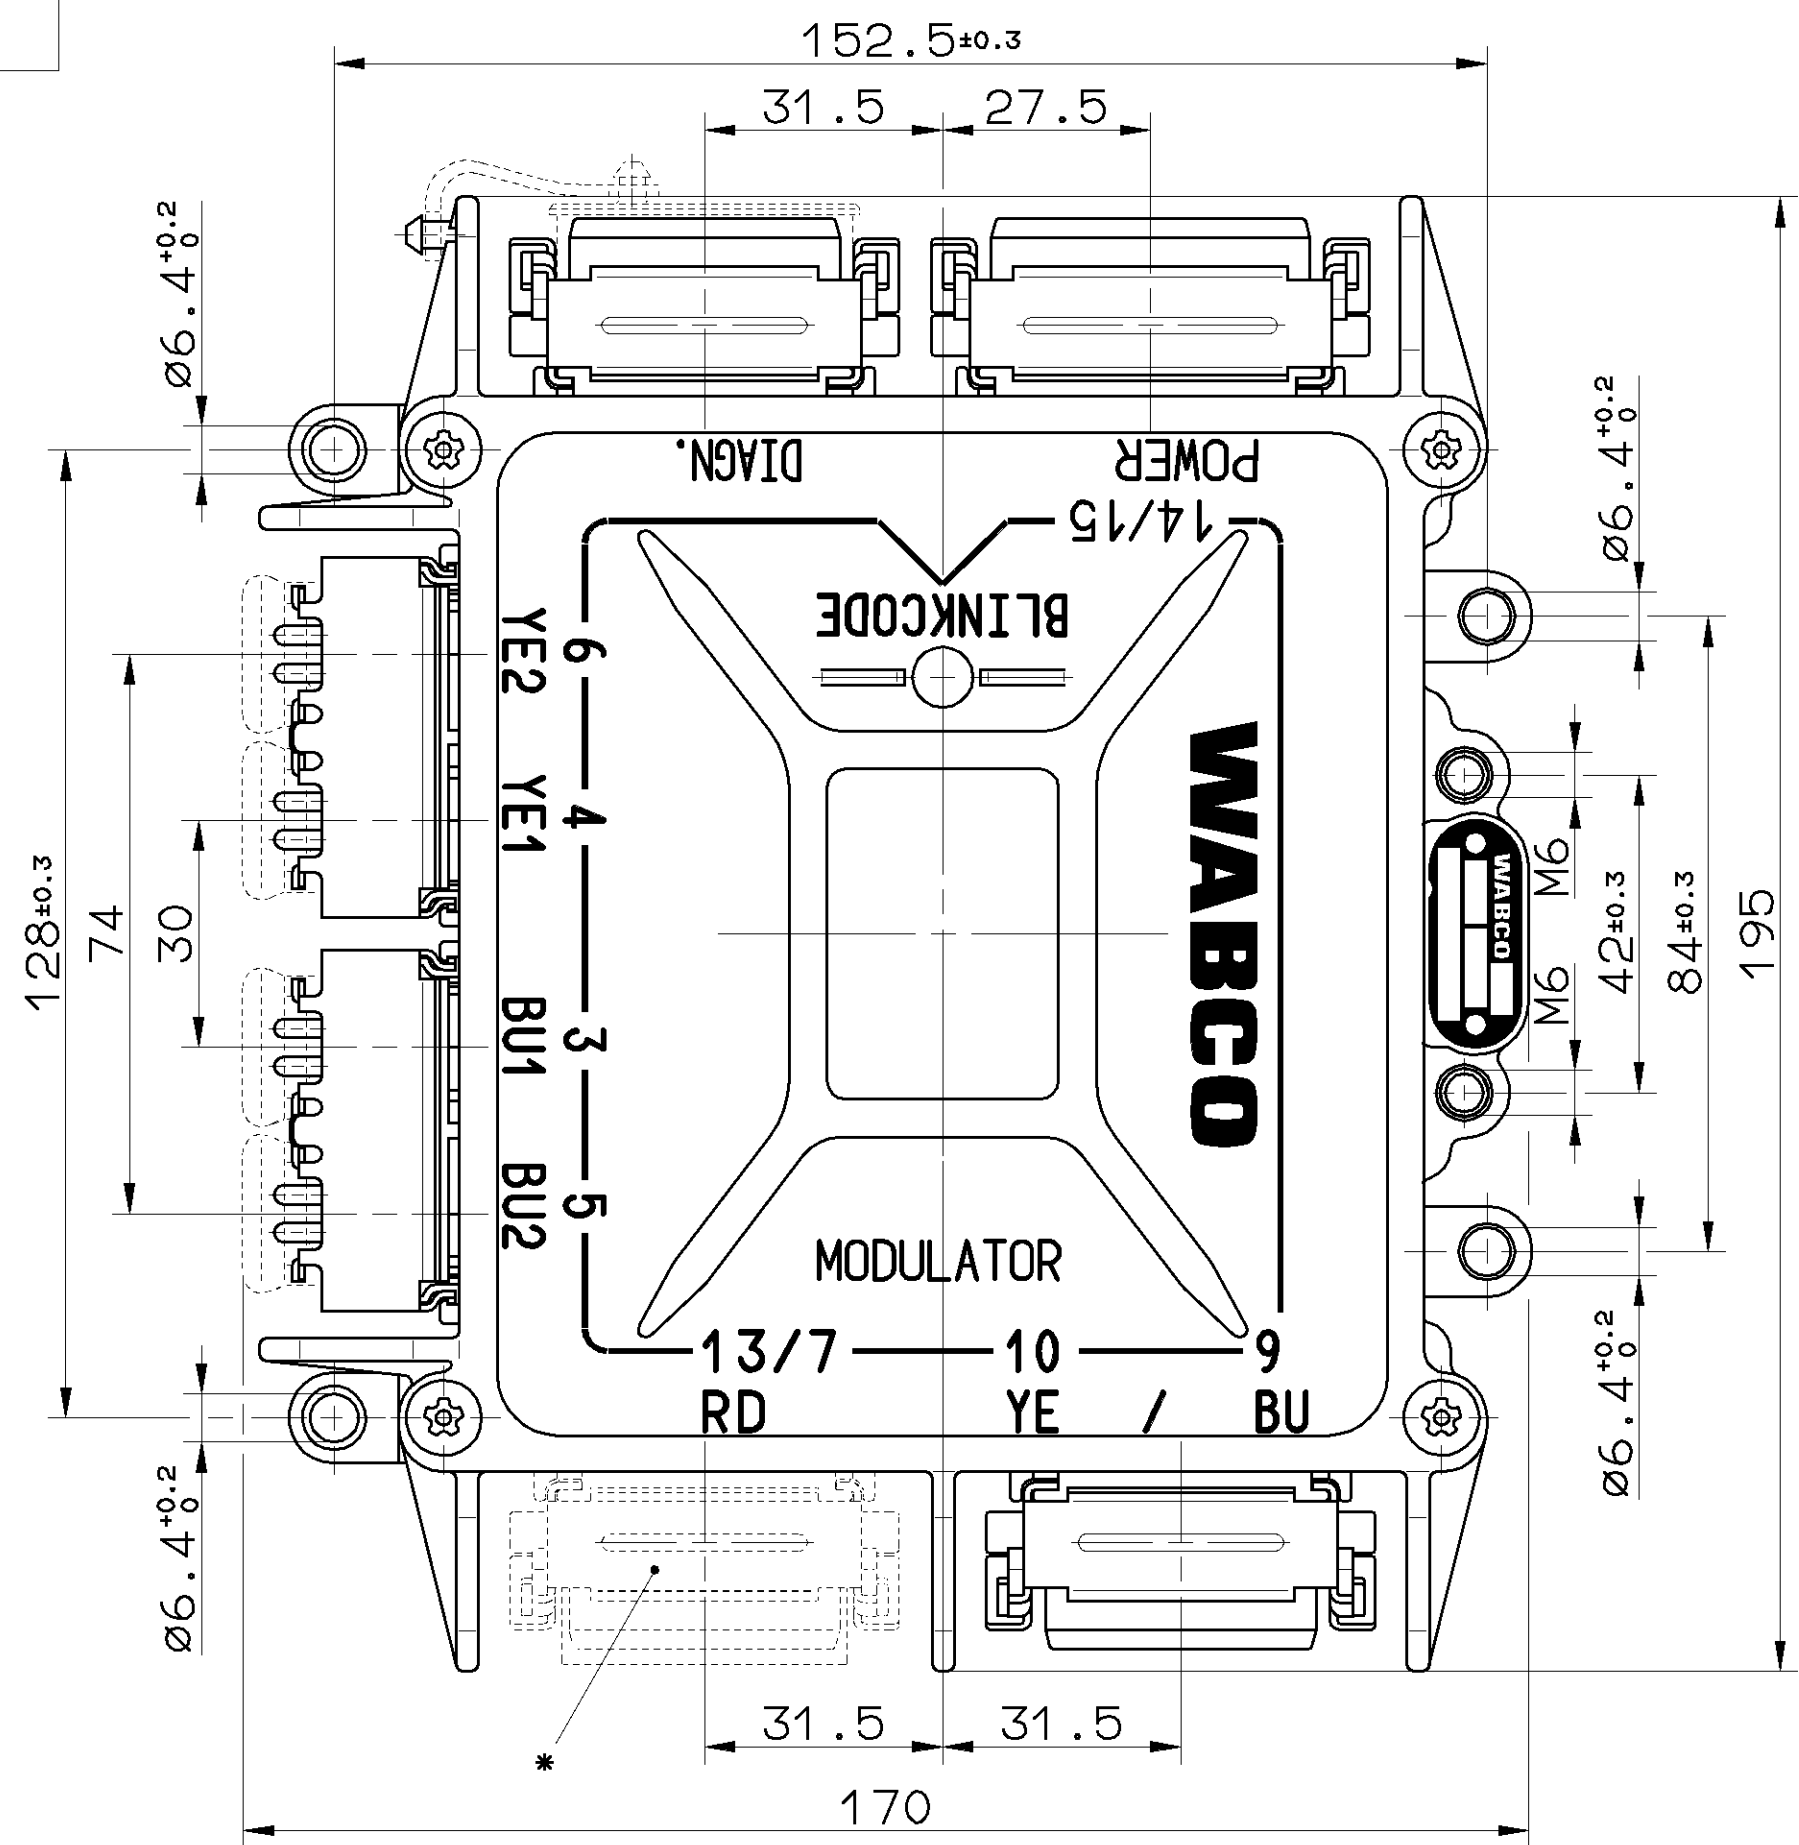

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION	}	446 108 030 0	24V
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION			
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION			
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO			
		446 108 050 0	12V

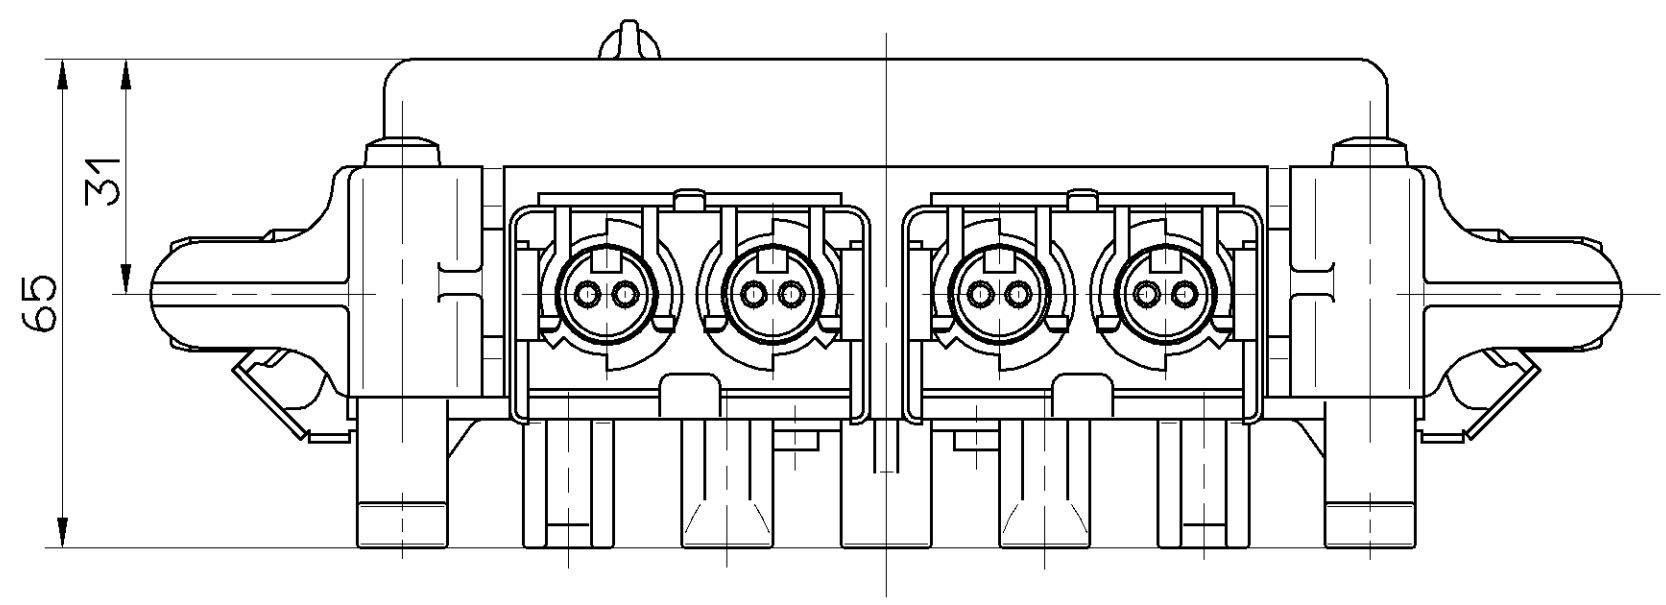

THERMAL RANGE OF APPLICATION
 THERMISCHER ANWENDUNGSBEREICH
 GAMME D'APPLICATION THERMIQUE
 CAMPO DI APPLICAZIONE TERMICA

} -40° C....+65° C

TYPE OF PROTECTION IN CONNECTION WITH MATING CONNECTOR	}	IP 66 } IEC 529/EN 60529
SCHUTZART IN VERBINDUNG MIT GEGENSTECKER		
MODE DE PROTECTION DANS CONNECTION AVEC FICHE FEMELLE		
TIPO DI PROTEZIONE IN AUTIVO CON CONNETTORE		
		IP 69K } DIN 40050 BL.9

IDENTIFICATION BENENNUNG DENOMINATION DENOMINAZIONE	MAX.SYSTEM MAX.SYSTEM MAX.SYSTEME MAX.SISTEMA	VOLTAGE SPANNUNG VOLTAGE VOLTAGGIO
446 108 030 0	4S/3M *	24V
446 108 035 0	4S/3M *	
446 108 040 0	4S/2M	
446 108 045 0	4S/2M	
446 108 031 0	4S/3M *	
446 108 032 0	4S/3M *	24V
446 108 041 0	4S/2M	
446 108 050 0	4S/3M *	
		⑥
		12V

GENERAL SPECIFICATION:				JED-334												CADAM-DRAWING COPYRIGHT				WABCO																											
FURTHER TECHNICAL DATA:																DATE				SIGNATURE																											
DOC. CODE:				SHEET:				TO												DRAWN:																											
GENERAL TOLERANCES																94-07-07 HIRT				VARIO-COMPACT-ABS VARIO-KOMPAKT-ABS VARIO-COMPACT ABS VARIO-COMPATTO ABS																											
																CHECKED:																															
CLASS 1) <table><tr><td></td><td>≤50</td><td>> 50 ≤180</td><td>>180 ≤400</td><td>>400</td></tr><tr><td>FINE</td><td>0,5</td><td>1,0</td><td>1,5</td><td>2,0</td></tr><tr><td>MEDIUM</td><td>1,0</td><td>2,0</td><td>3,0</td><td>4,0</td></tr><tr><td>COARSE</td><td>2,0</td><td>3,5</td><td>5,0</td><td>6,5</td></tr></table>									≤50	> 50 ≤180	>180 ≤400	>400	FINE	0,5	1,0	1,5	2,0	MEDIUM	1,0					2,0	3,0	4,0	COARSE	2,0	3,5	5,0	6,5									94-07-07 GUDAT							
									≤50	> 50 ≤180	>180 ≤400	>400																																			
FINE	0,5	1,0	1,5	2,0																																											
MEDIUM	1,0	2,0	3,0	4,0																																											
COARSE	2,0	3,5	5,0	6,5																																											
																STANDARDIZATION:																															
												MASS				SCALE		PRODUCT IDENTIFICATION NO.						DOC. CODE		SHEET																					
												1 KG				1 : 1		446 108 030 0						653		1/2																					
												SIZE				T.R.I.																															
												A 2				142						SHAPE CODE		REPLACEMENT FOR																							
TAPPED HOLES ACC. ISO 4039 / JED-182																																															
1) TOLERANCE CLASS APPLIED CROSSMARKED								DCN-NO.				REV.				DATE																															
5								100mm								EXPERT CODE				7 6 7		PRODUCT TYPE				0 2 X																					