	MATERIAL MATERIAU	SURFACE PROTECTION OBERFLAECHENSCHUTZ
I	Al 99	
II	PBT GF20	
III	CuSn0.15	Sn28M
IV	Steel 20MnB4	Zn-Ni
V	ACRYLATE	
VI	X10CrNi18-8	

<CI> CUSTOMER INTERFACE | 0

****** SPRING DIAGRAM 2 SPRINGS
FEDERDIAGRAMM 2 FEDERN



VOLTAGE:
SPANNUNG: 20V...32V DC *

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40° ... +75° C

NON-OPERATING TEMPERATURE:
TEMPERATUR AUSSER BETRIEB: -40° ... +90° C *

PROTECT TYPE:
SCHUTZART: IP 30 (IEC 529)

MAX. CURRENT TERMINAL:
MAX. STROM KLEMME 15: 2mA
MAX. CURRENT TERMINAL:
MAX. STROM ANSCHLUSS 30ab: 24A

INSTALLATION POSITION: OPTIONAL
EINBAULAGE: BELIEBIG

SOFTWARE VERSION: SEE CCT
SOFTWAREVERSION: SIEHE LEBENSLAUFBLATT

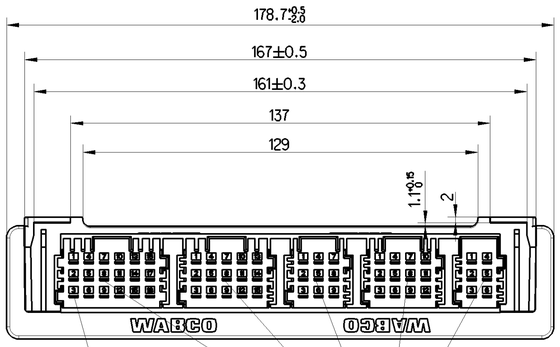

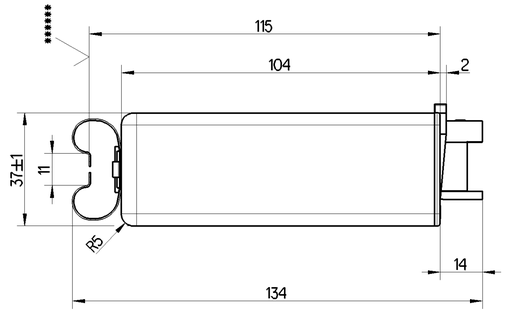

SEE DOCUMENT: 858 000 648 4 (DOC. CODE 007)
SIEHE DOKUMENT: 858 000 648 4 (DOC. CODE 007)

PLUG CONNECTIONS IN ACCORDANCE WITH MB DESIGN RULE A 940 000 97 99
STECKVERBINDUNG GEMAESS MB AUSFUEHRUNGSVORSCHRIFT A 940 000 97 99

LABELING INFORMATION

No	FIELD DESCRIPTION
1	DC -LOGO AND CUSTOMER NUMBER / ZGS
2	WABCO - 16 - JED369
3	PRI
4	DATE OF MANUFACTURE (JED-226) week / year
5	SERIAL NUMBER
6	
7	WABCO IDENTIFICATION NUMBER
8	DEVICE IDENTIFICATION NAME
9	BARCODE ACC. TO ISO/IEC16390 INTERLEAVE 2 OF 5, WITHOUT CHECK DIGIT POS. 1-4: BARCODE HEADER POS. 5-10: SERIAL NUMBER
10	EMC HOMOLOGATION MARK
11	COUNTRY OF ORIGIN
12	
13	
	NOTE FOR 1-13: REFER TO CCT FOR DETAILS

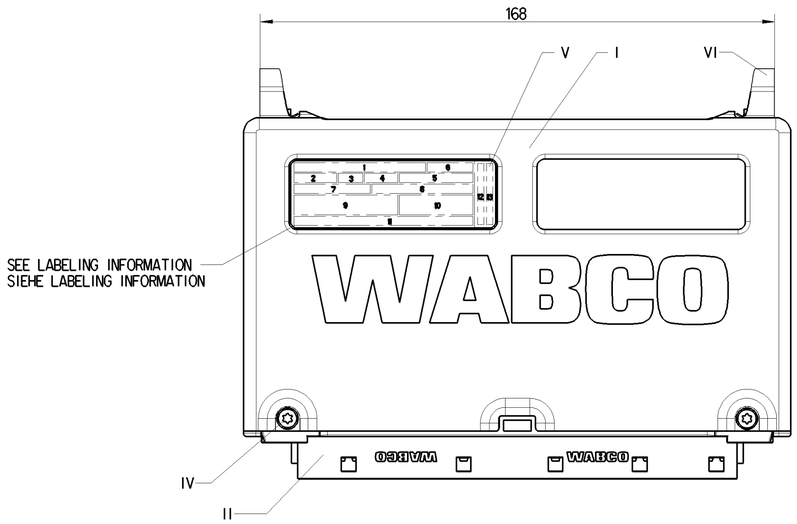

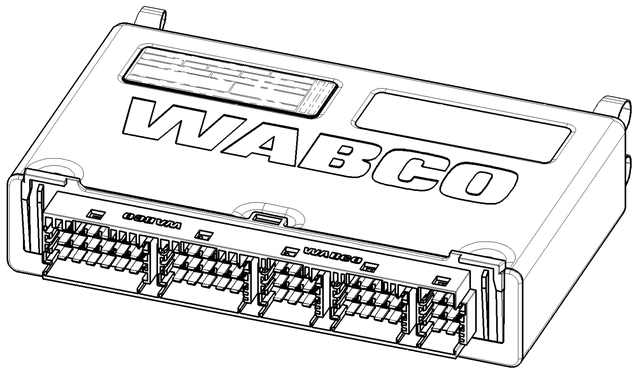

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmustereintragung vorbehalten.

Non è permesso consegnare a terzi o riprodurre questo documento, né utilizzare il contenuto o rendere comunque noto a terzi senza autorizzazione scritta. Tutti i diritti di proprietà industriale, in particolare quelli di brevetto e di registrazione di modelli, sono riservati.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP					
Further Technical Data:					
Doc. Code:		Sheet:		To	
General Tolerances JED-261					
	Range of nominal dimensions in mm				
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine	±0.5	±1	±1.5	±2	
Medium X	±1	±2	±3	±4	±3°
Coarse	±2	±3.5	±5	±6.5	
Tapped Holes acc.					
1) Tolerance Class Applied Crossmarked					

Copyright WABCO®

Date	Signature	
Drawn 2023-02-02	Sobola	
Checked 2023-02-02	Hecht	

WABCO

ECU

Dimensions in mm

Mass	Scale	Material No.	Date of first issue: 2019-06-21	
0.37 kg	1:1	446 130 215 0	Doc.Code 005	Language DE / Sheet 1/1
Size A 1	CAD System CREO			

ECN-No.	Revision	Techn. Resp.	Replacement for
509641	2x B	6830	

100mm