
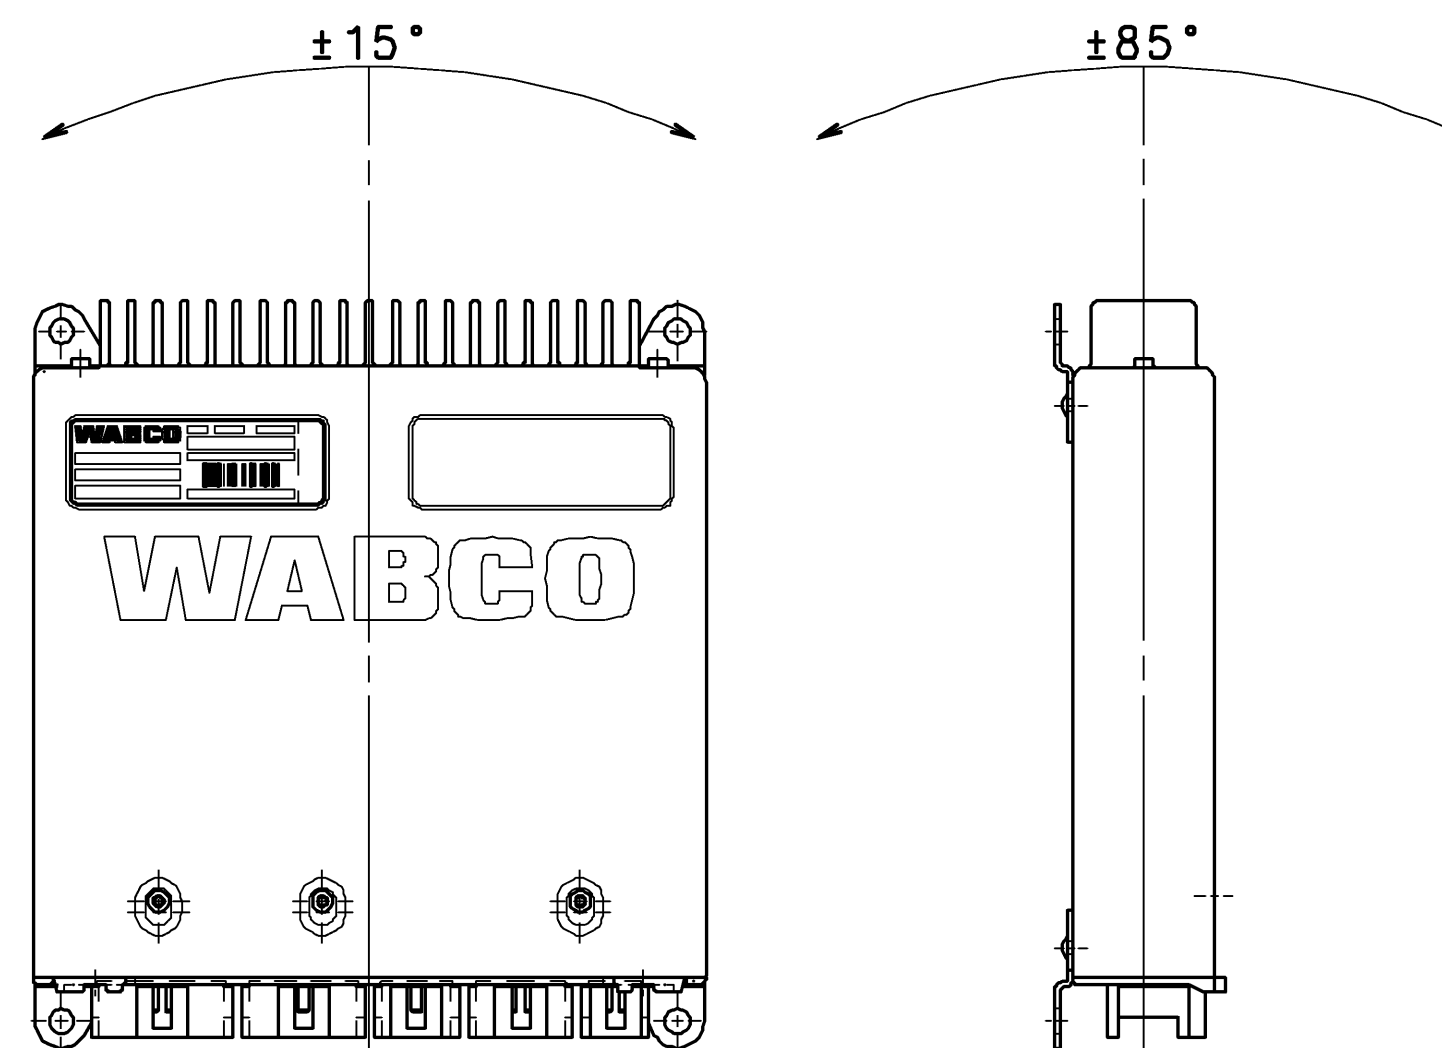


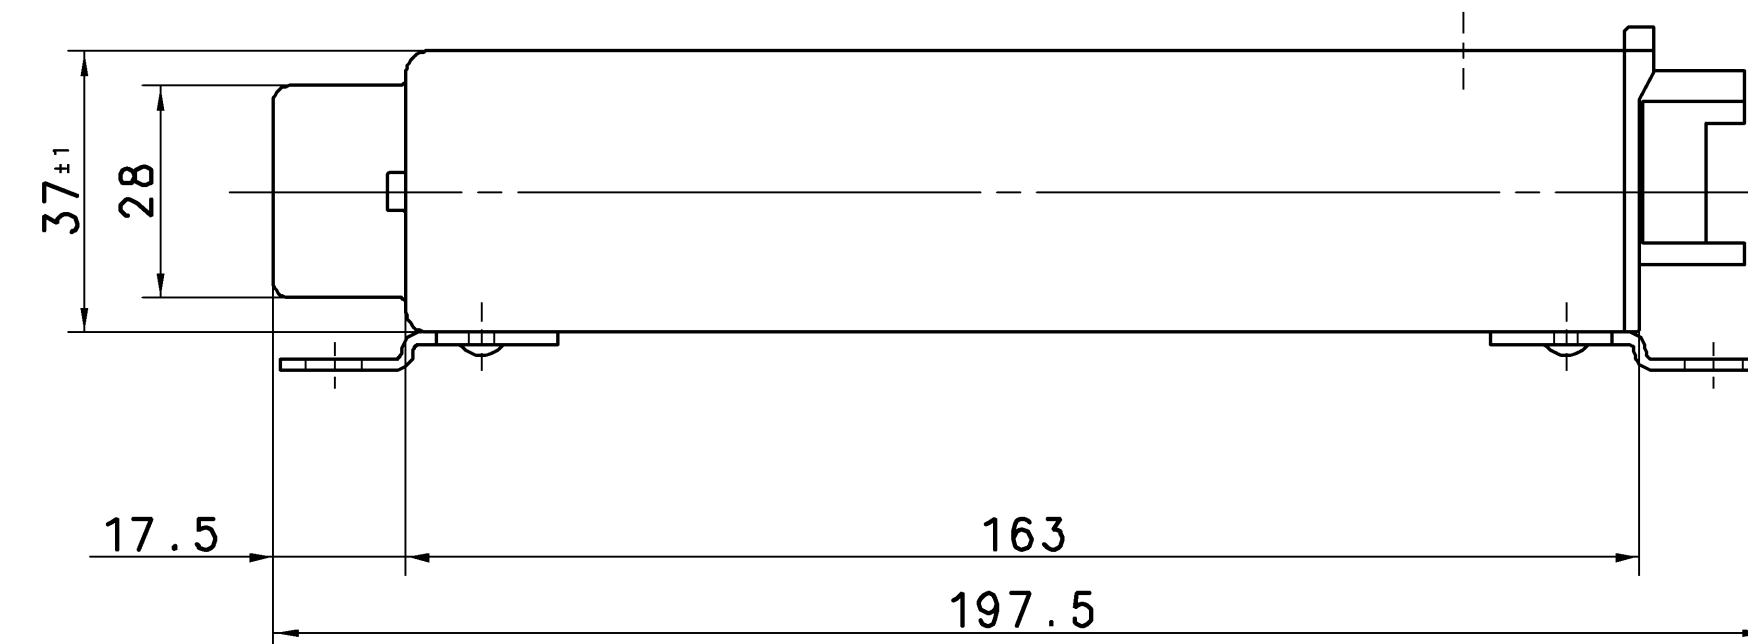

VOLTAGE :
SPANNUNG : 24V ^{+8V} _{-4V} DC *

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°...+75°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

STORING TEMPERATURE :
 LAGERTEMPERATUR : -40°...+90°C *

```

PROTECT TYPE      :
SCHUTZART         :      IP 30 (IEC 529)
MODE DE PROTECTION:
MODULO DI PROTEZIONE:

```

MALE MULTIPPOINT CONNECTOR:	SURFACE PROTECTION	:	TINNED
MESSERLEISTE:	OBERFLAECHENSCHUTZ	:	VERZINNT
CONNECTEUR MALE MULTIBROCHE:	PROTECTION DE SURFACE:	:	ETAME
SPINE MULTIPA:	PROTEZIONE SUPERFICIALE	:	STAGNATO

* FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VERDERE SPECIFICA DI PRODOTTO

* * DATE OF MANUFACTURE :
HERSTELLDATUM : JED-226
DATE DE FABRICATION :
DATA DI FABBRICAZIONE:

```

* * * SERIAL NUMBER GREATER THAN :
Fortschrittszahl grösser als : 4000 (A)
Numero di serie più grande que:
Numero di serie più grande di :

```

General Specification: JED-134-0				Copyright WABCO®							
Further Technical Date:				Date	Signature						
Doc. Code:		Sheet:		To		Drawn		ELECTRONIC EBS ELEKTRONIK EBS-ZENTRALMODUL 08-04-091 STEHR EBS 2000 EXPLOIT ELETTRONICA EBS			
General Reference: JED-261						08-04-091 PFENNIG					
Range of Nominal Dimensions (± mm)						Checked					
						08-04-091 STEHR					
						Exploit					
						HEINRICH					
						Mass		Scale		Material No.	
						0.852 KG		1:1		446 135 030 0	
						Size		CAD System		EDN-No.	
						A 1		CCD		115049	
										Revisions	
										Techn. Resp.	
										6830-E	
										Replacement for	
Tapped Holes acc.											
1) Tolerance Class Applied Crossmarked											