





NON-OPERATING TEMPERATURE:
TEMPERATUR AUßER BETRIEB: -40° ... +90° C *
TEMPERATURE HORS FONCTIONNEMENT:
TEMPERATURA FUORI ESERCIZIO:

PROTECT TYPE: IP 30 (IEC 529)
SCHUTZART:
MODE DE PROTECTION:
MODO DI PROTEZIONE:

FOR FURTHER DETAILS SEE PRODUCT SPECIFICATION
FÜR WEITERE DETAILS SIEHE PRODUKTSPEZIFIKATION
POUR AUTRES DONNÉES TECHNIQUES VOIR SPECIFICATION DU PRODUIT
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

DATE OF MANUFACTURE:
 ** HERSTELLDATUM: JED-226
 DATE DE FABRICATION:
 DATA DI FABBRICAZIONE:

*** SERIESNUMBER GREATER THAN:
FORTSCHRITTSZAHL GOESSER ALS: 10000 ®
NUMERO DE SERIE PLUS GRAND QUE:
NUMERO DI SERIE PIU GRANDE DI:

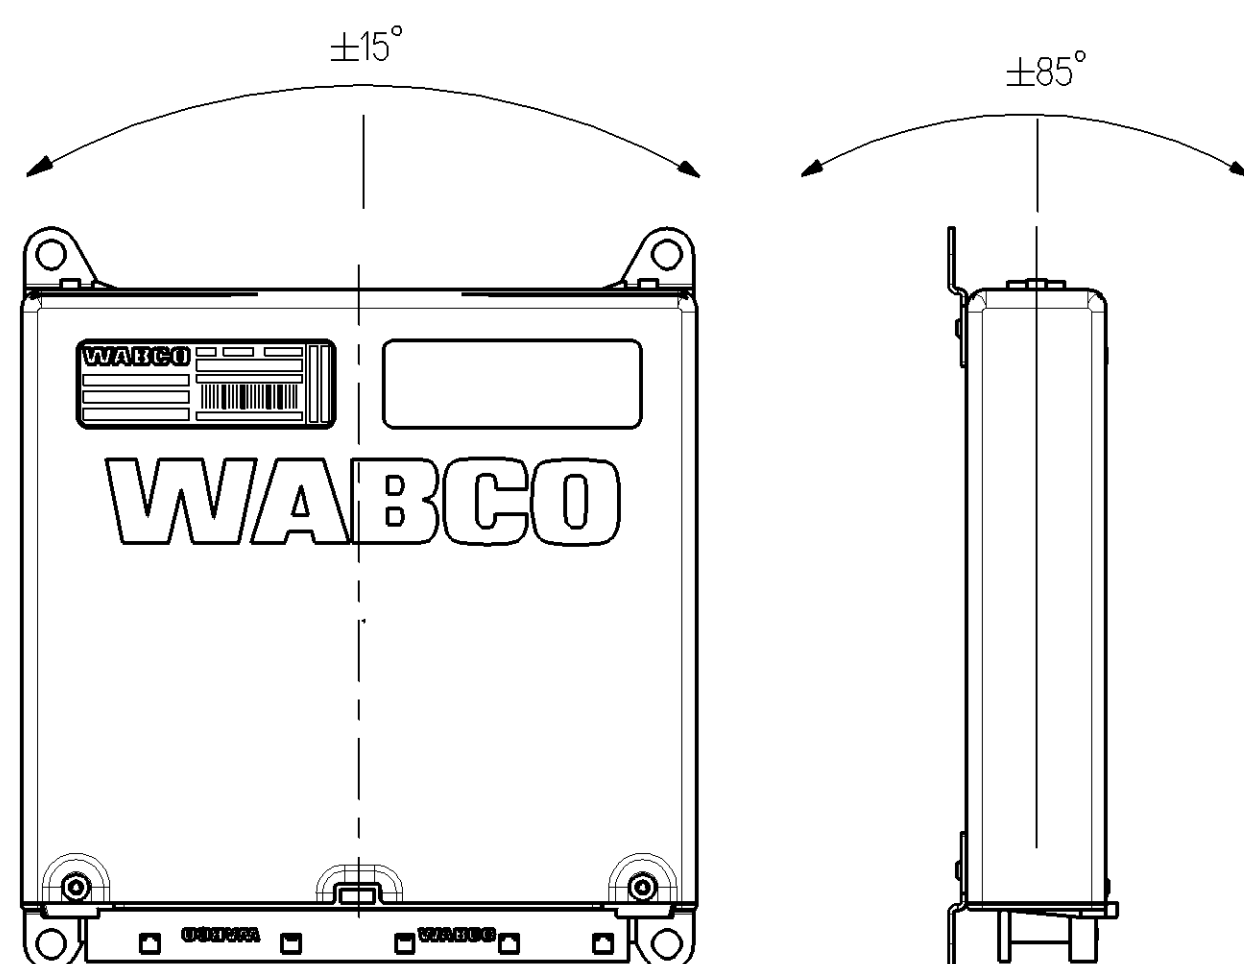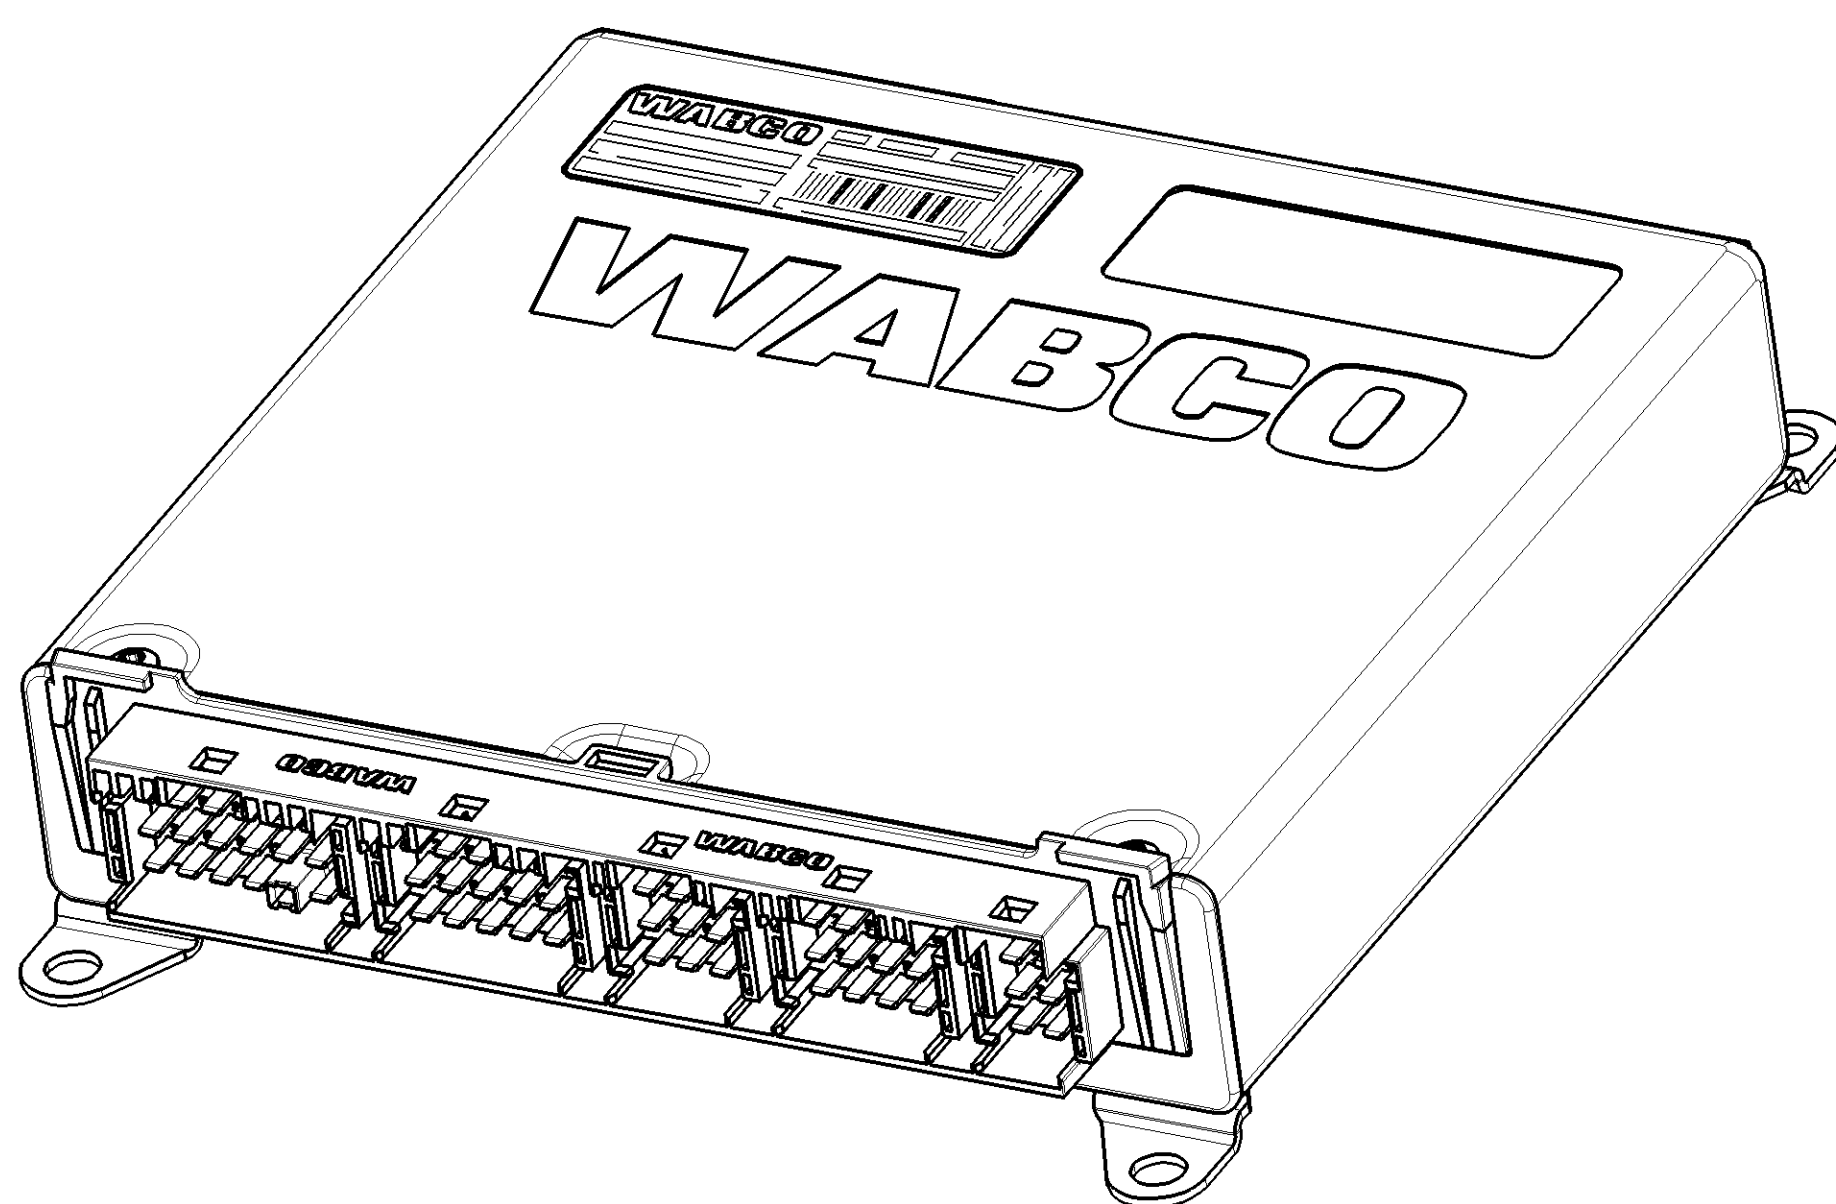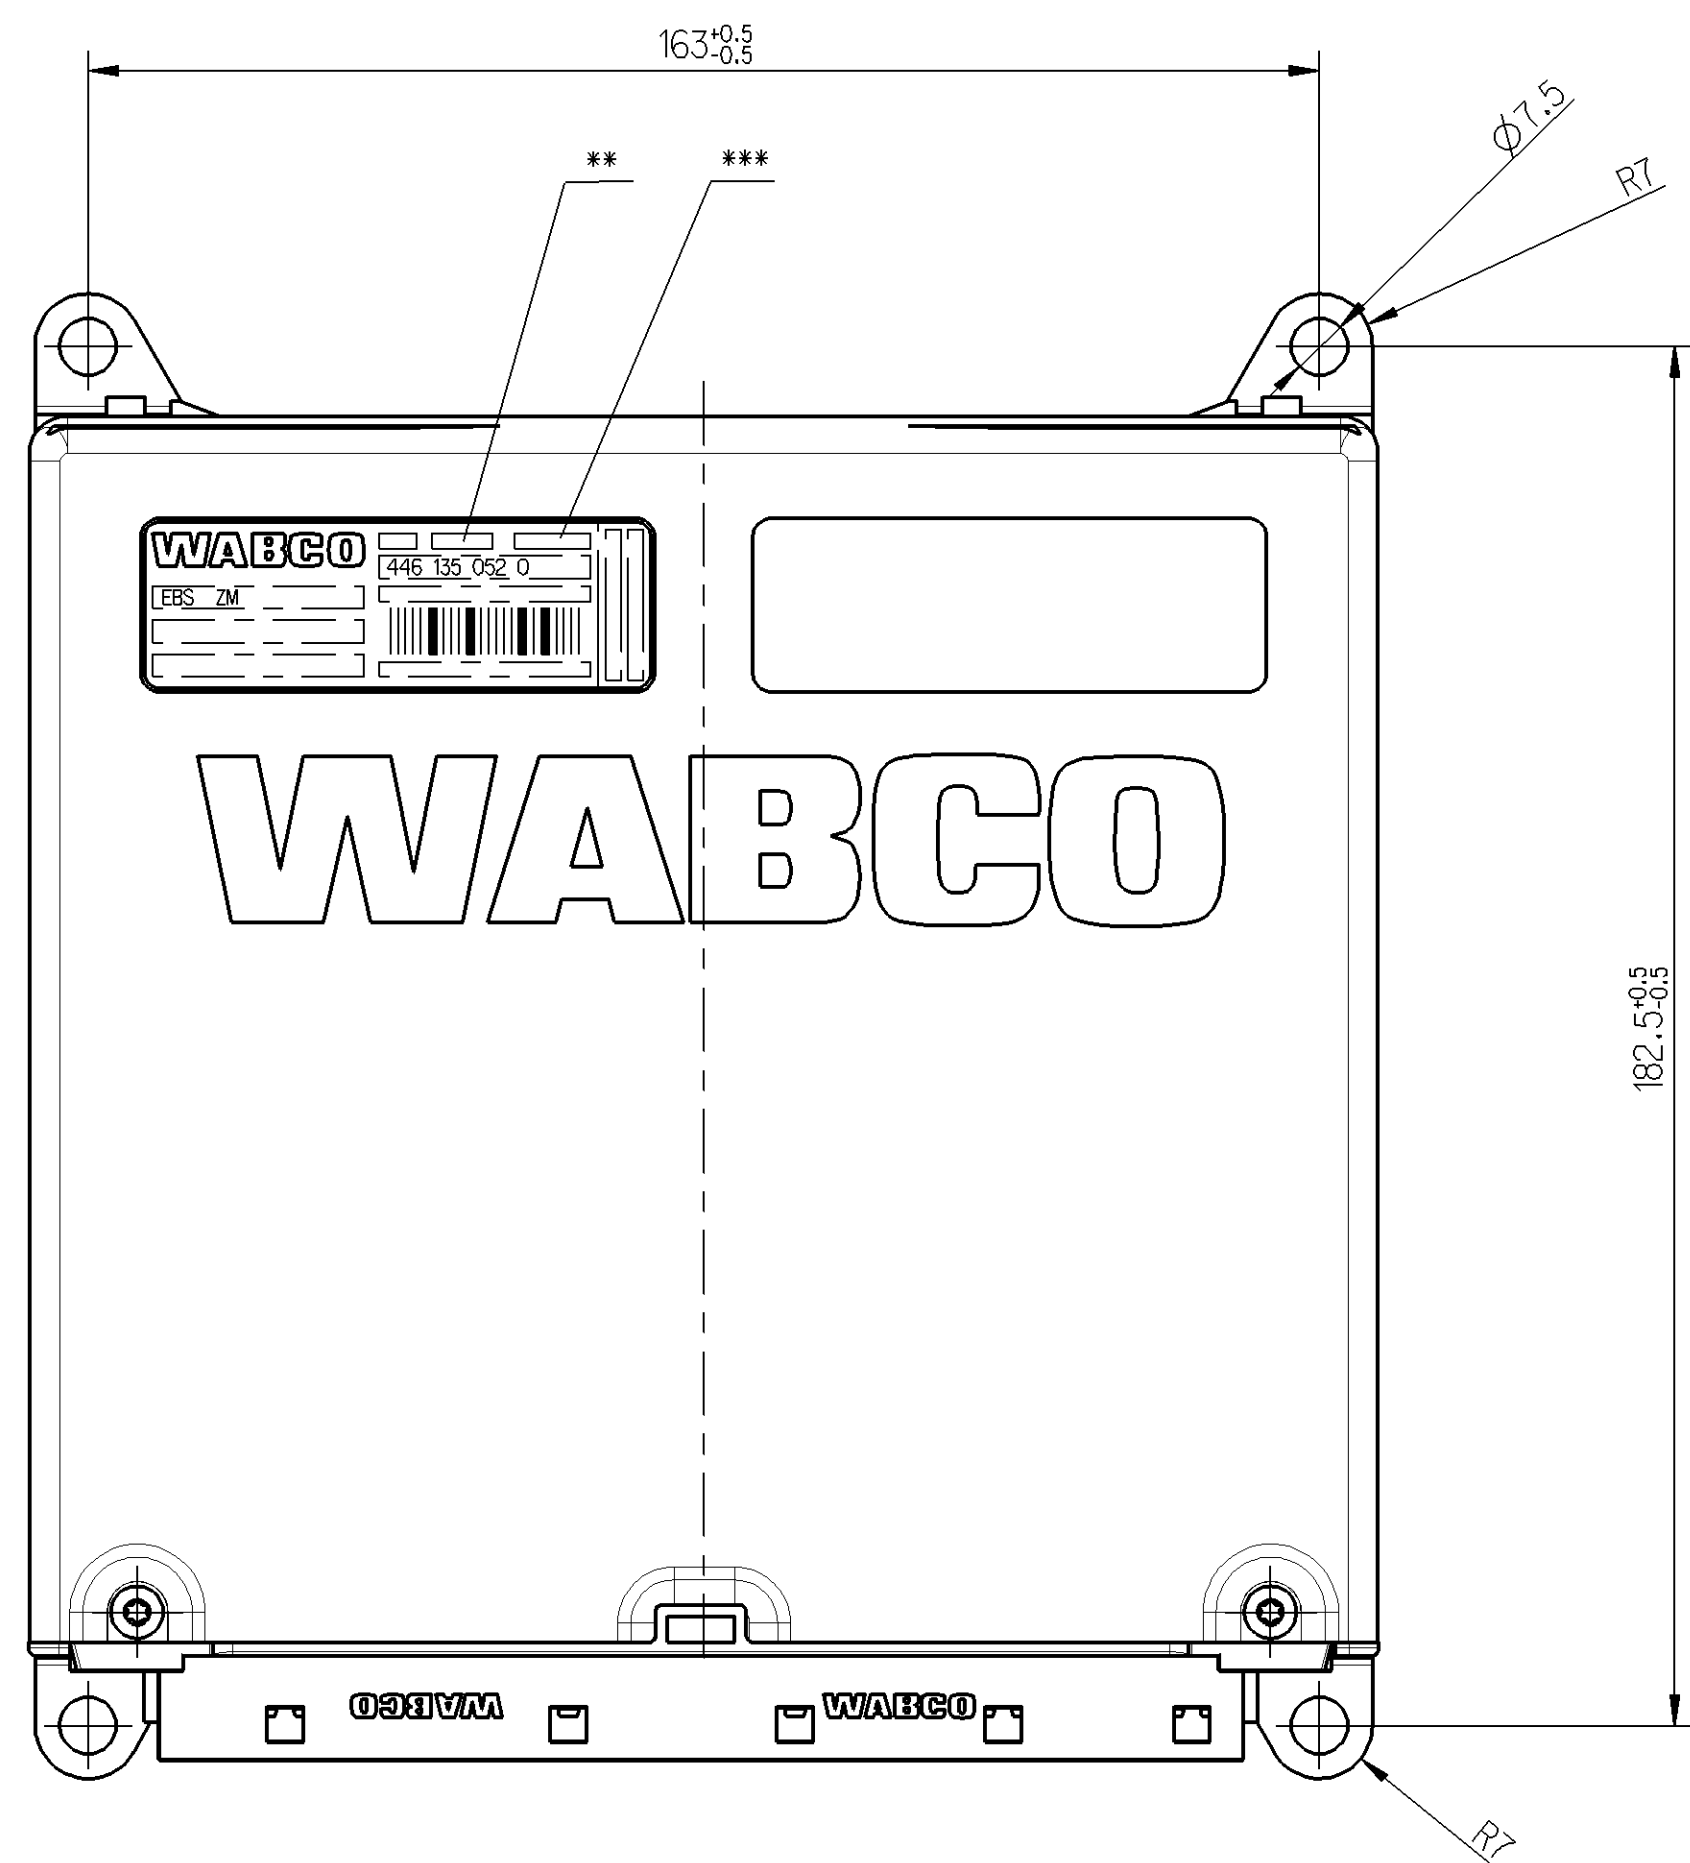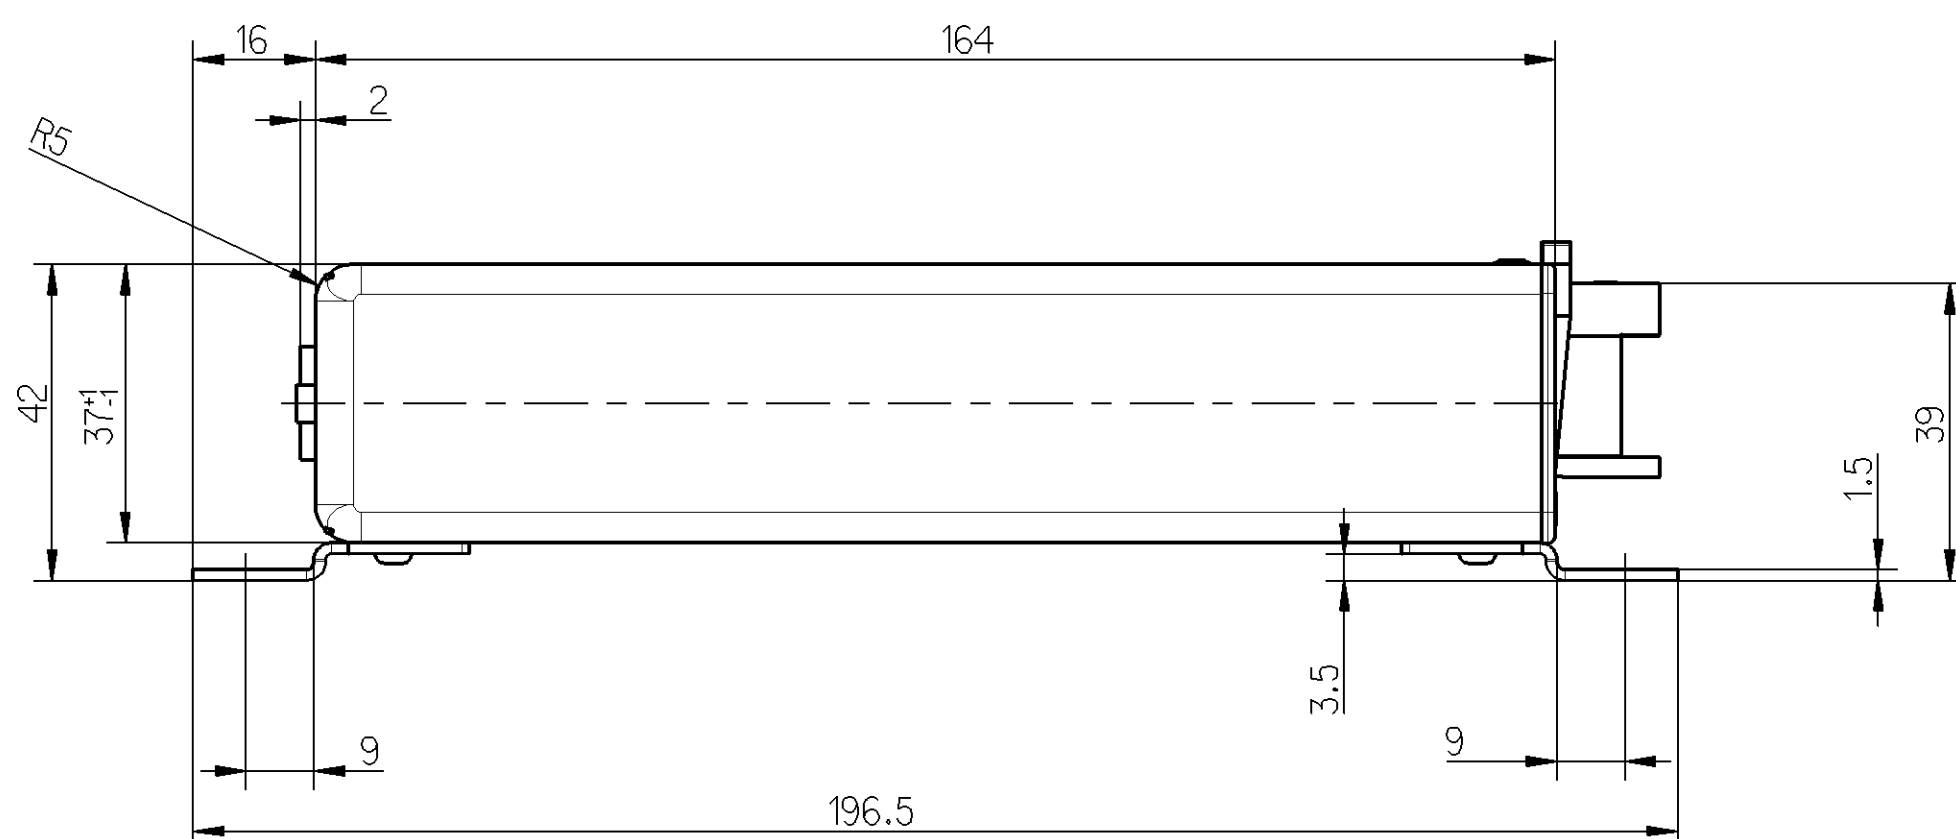

111982	1x8	2007-4
068489	1x4	2006-1
DCN-No.	Rev.	DC

General Specification: JED-334-0					Copyright WABCO ®		WABCO																													
Further Technical Data:					Date		Signature		ELECTRONIC ELEKTRONIK EBS-ZENTRALMODUL ELECTRONIQUE ELETTRONICA 4S/4M																											
Doc. Code:		Sheet: To			Drawn																															
General Tolerances: JED-261					2006-05-16		RATHEN																													
Range of Nominal Dimensions (± mm)					2005-05-26		Willms																													
					Expert																															
					HEINRICH																															
<table><tr><td>Class</td><td>1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>≥ 400</td></tr><tr><td>Fine</td><td></td><td>0,5</td><td>1,0</td><td>1,5</td><td>2,0</td></tr><tr><td>Medium</td><td>X</td><td>1,0</td><td>2,0</td><td>3,0</td><td>4,0</td></tr><tr><td>Coarse</td><td></td><td>2,0</td><td>3,5</td><td>5,0</td><td>6,5</td></tr></table>					Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	≥ 400	Fine		0,5	1,0	1,5	2,0	Medium	X	1,0	2,0	3,0	4,0	Coarse		2,0	3,5	5,0	6,5	Mass		Scale		Material No.		WABCO Id. No.: 4461350520	
					Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	≥ 400																										
					Fine		0,5	1,0	1,5	2,0																										
					Medium	X	1,0	2,0	3,0	4,0																										
Coarse		2,0	3,5	5,0	6,5																															
					0,6 KG		1:1		446 135 052 0		605 en/de fr/it		1/1																							
					Size		TRI																													
Tapped Holes acc.					A 1		620				Function Code		CAD System		Prod. Type		Replacement for																			
(1) Tolerance Class Applied Crossmarked											Pro/E		Prod. X																							