
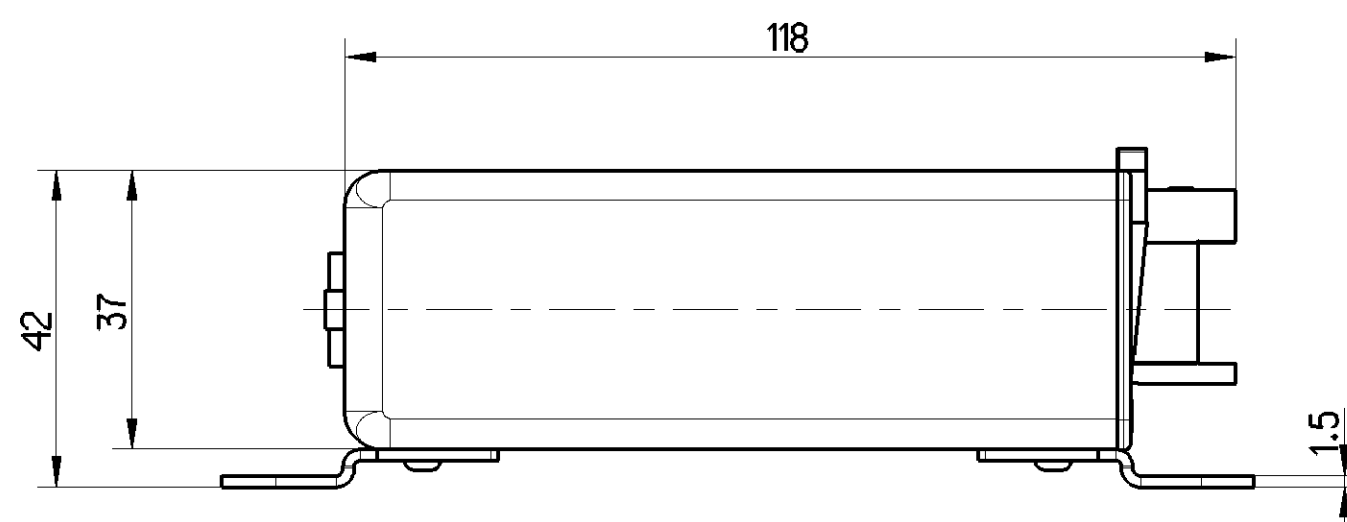


<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0

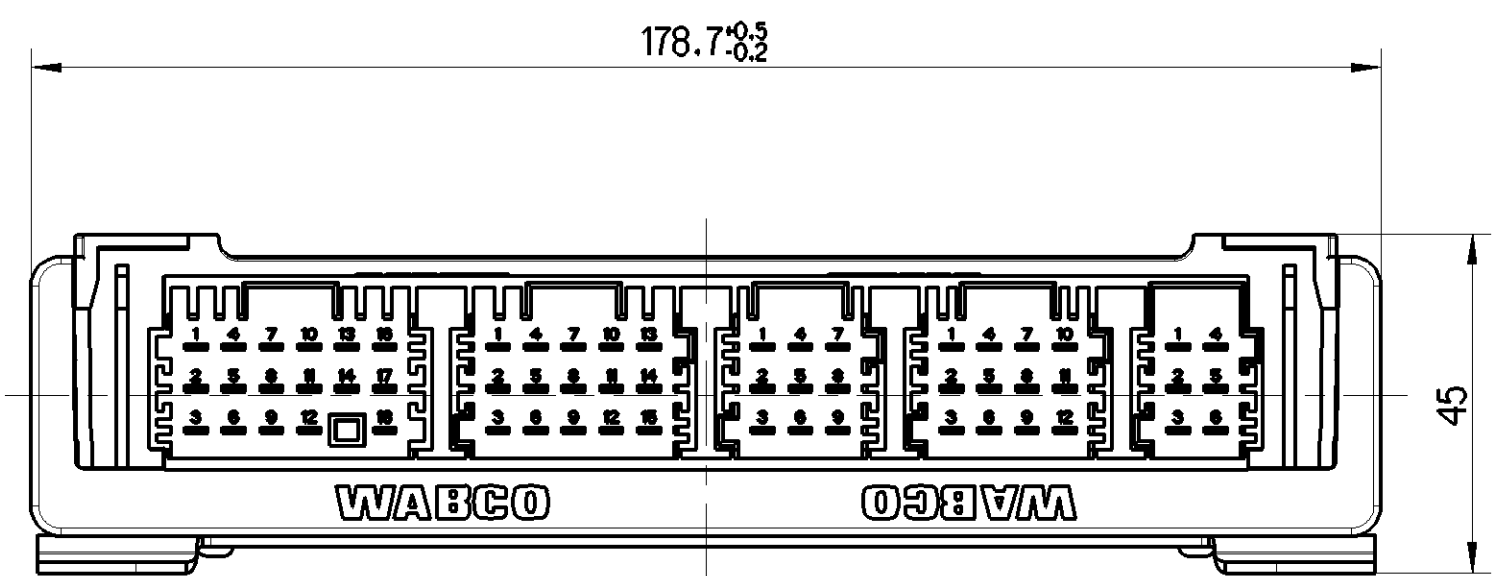

VOLTAGE:
SPANNUNG: 24V +8/-4 DC

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40 °C ... +75 °C

NON-OPERATING TEMPERATURE:
TEMPERATUR AUSSER BETRIEB: -40 °C ... +90 °C

PROTECT TYPE:
SCHUTZART: IP 30 (IEC 529)




MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION: TINNED
MESSERLEISTE: OBERFLÄCHENSCHUTZ: VERZINNT

FOR FURTHER DETAILS SEE PRODUCT SPECIFICATION
FÜR WEITERE DETAILS SIEHE PRODUKTSPEZIFIKATION

DATE OF MANUFACTURE:
* HERSTELLDATUM: JED-226

SERIESNUMBER GREATER THAN:
** FORTSCHRITTSZAHL GOESSER ALS: SEE CCT

INSPECTION MARK: SEE LABELING INFORMATION
 *** PRUEFZEICHEN: SIEHE LABELING INFORMATION

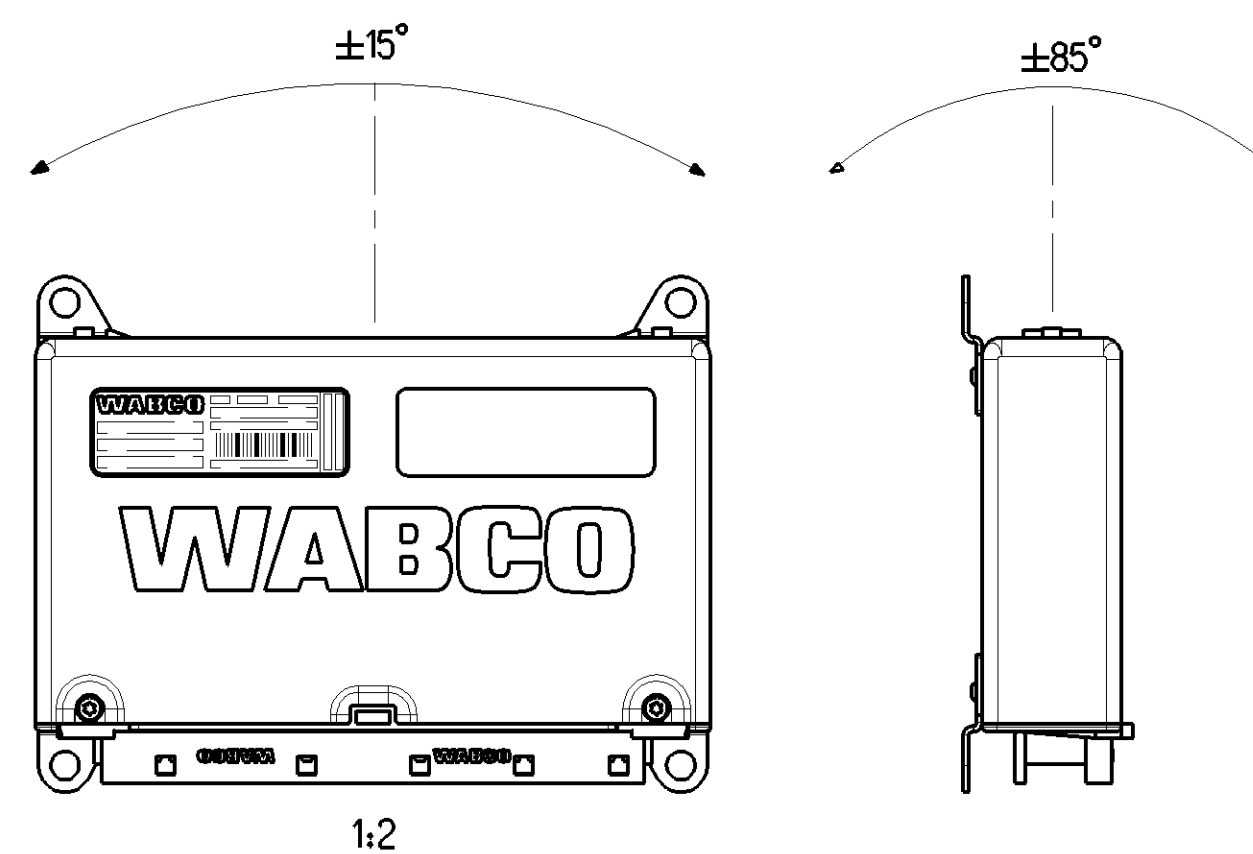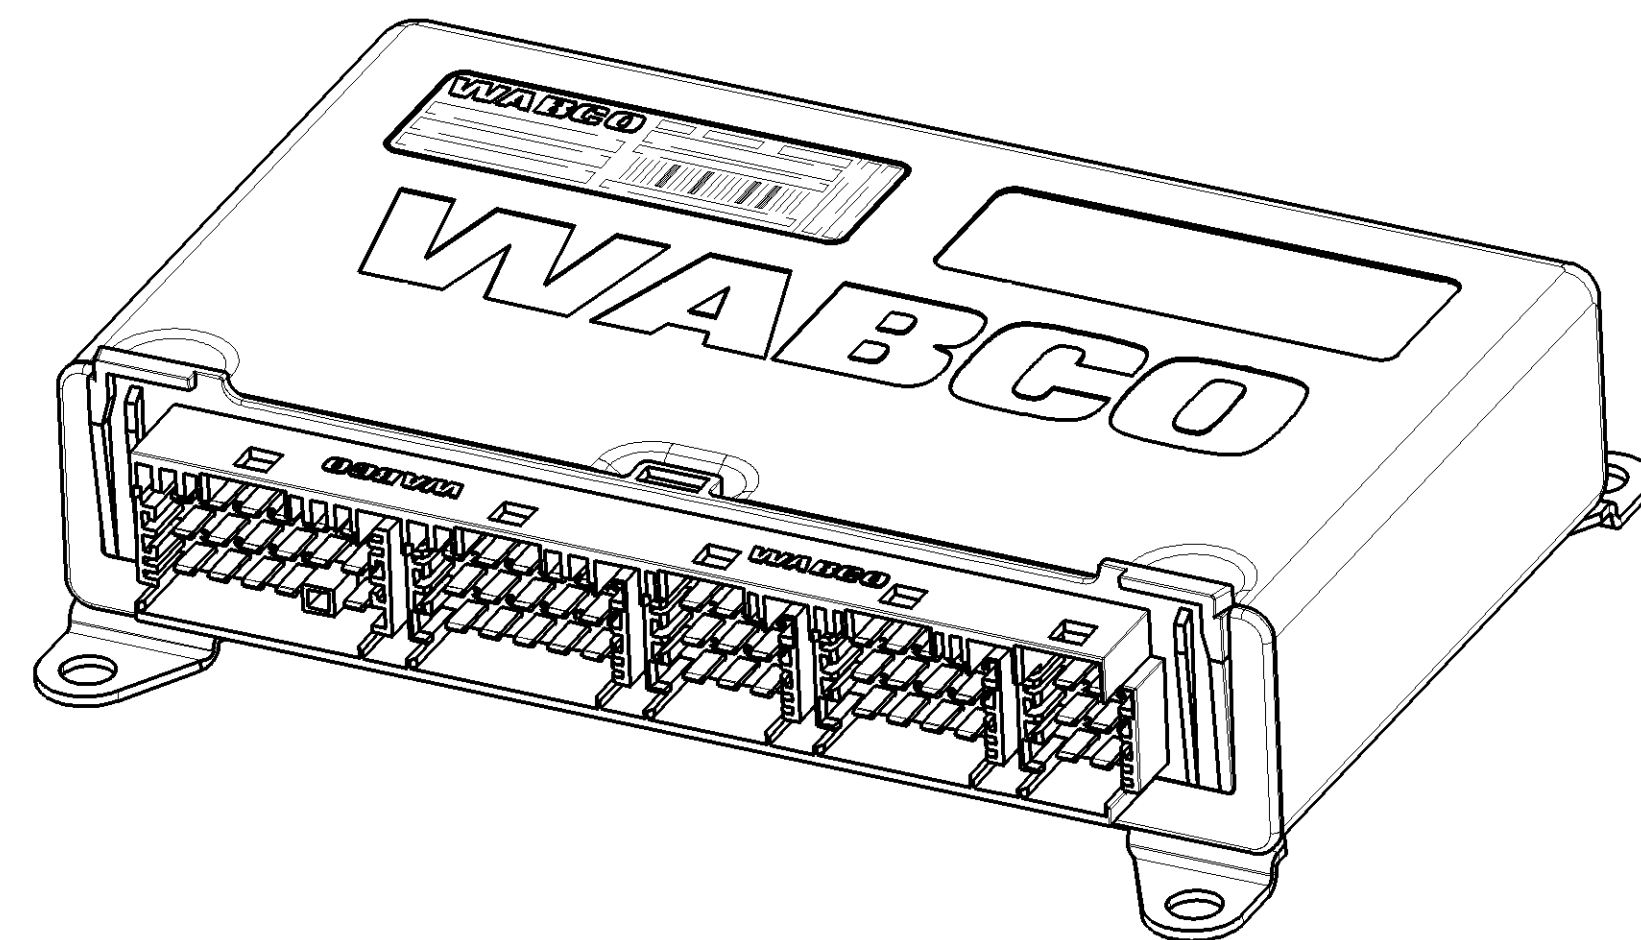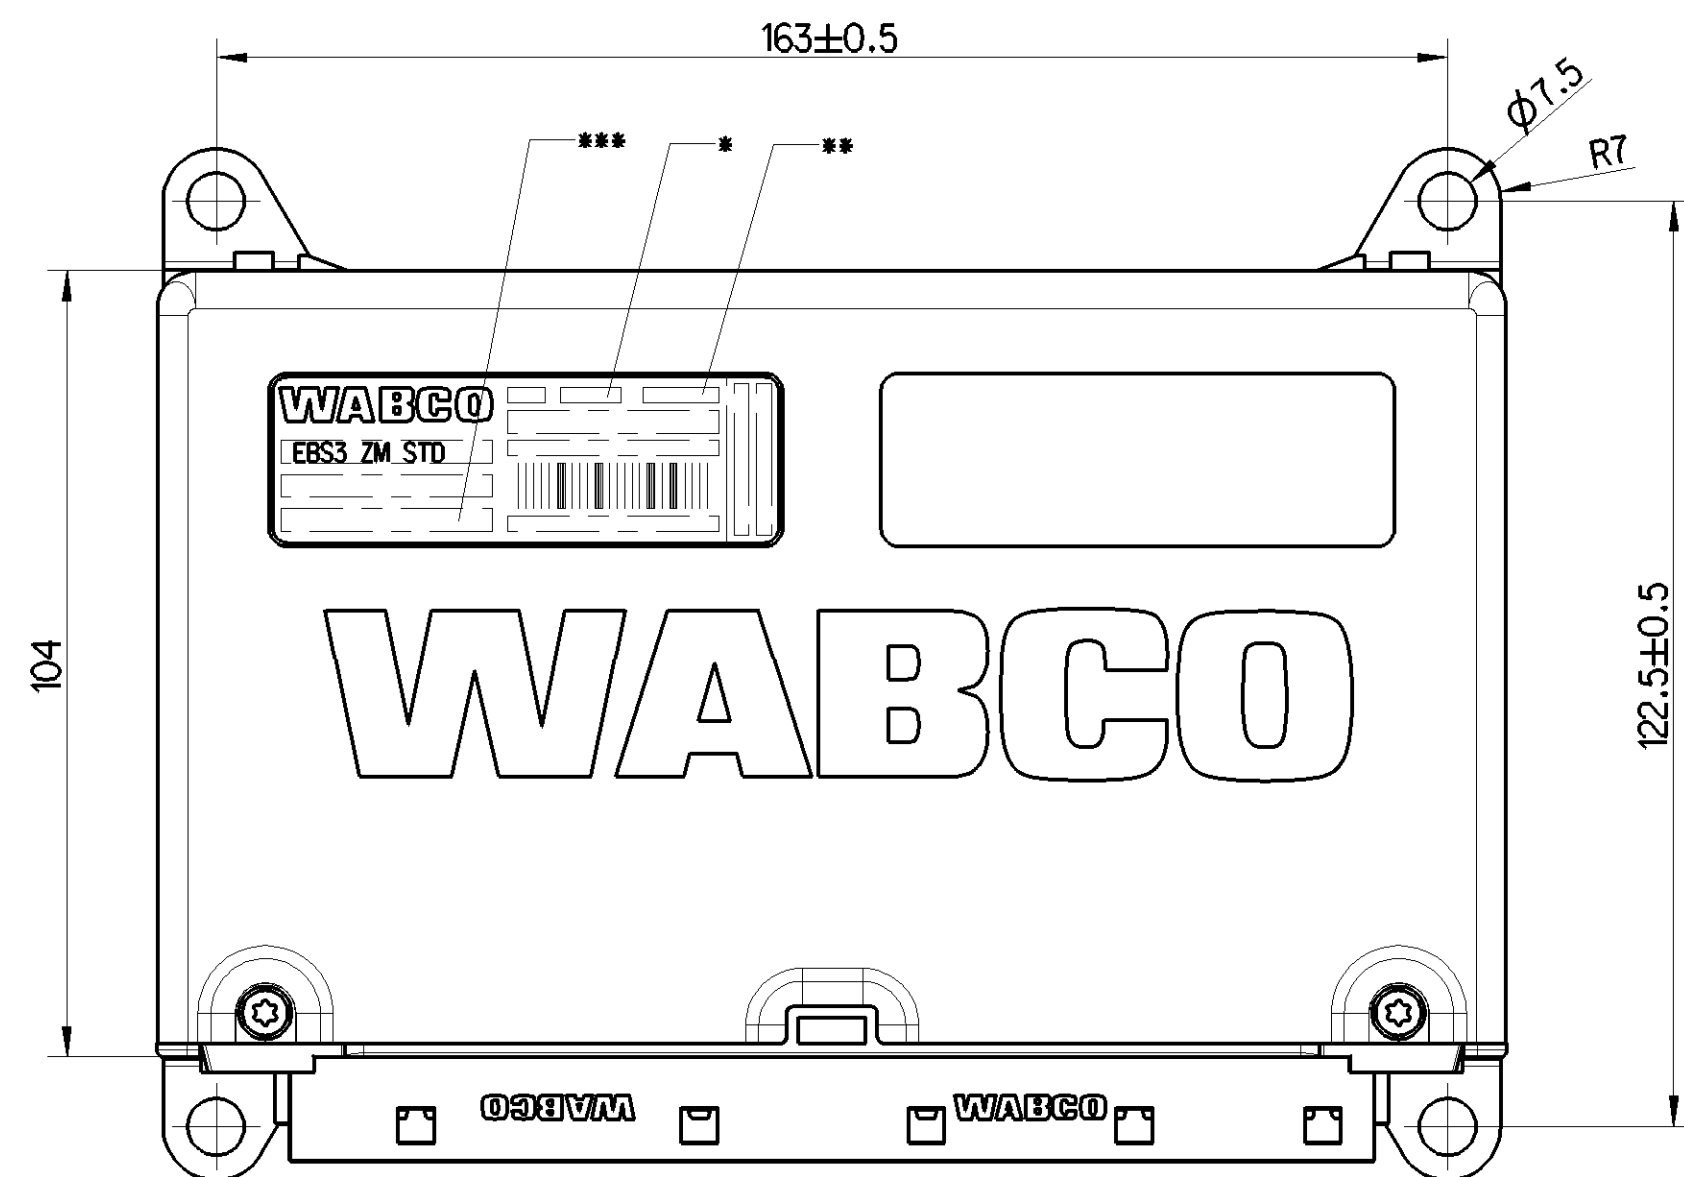

INSTALLATION POSITION:
EINBAULAGE:

DEVIATING MOUNTING POSITIONS TO BE APPROVED BY WABCO
ABWEICHENDE EINBAULAGEN SIND MIT WABCO ABZUSTIMMEN

General Specifications: JED-334-I						Copyright WABCO®				WABCO ECU EBS3.3 STD					
Further Technical Data:						Date		Drawn						Signature	
Doc. Code:		Sheet:		To		2018-05-31		Plemig						Checked	
General Tolerances JED-261						2018-05-31		Hechl						Expert	
Range of Nominal Dimensions (± mm)						2018-05-31		Hechl							
Class	1)	≤ 50	> 50 ≤ 180	≤ 180 ≤ 400	> 400										
Fine		0,5	1,0	1,5	2,0										
Medium	X	1,0	2,0	3,0	4,0										
Coarse		2,0	3,5	5,0	6,5										
±3°															
Tapped Holes acc.															
1) Tolerance Class Applied Crossmarked															

Mass		Scale		Material No.		Date of first issue:		2018-05-31	
0.5 kg	1:1 (1:2)			446 135 246 0		Doc.Code		Language	
X	Size					005		DE	
CAP System								1/1	
A 1		Pro/E				ECN-No.		Revision	
						-		-	
						Tech. Respo.		6830	
						Replacement for			