

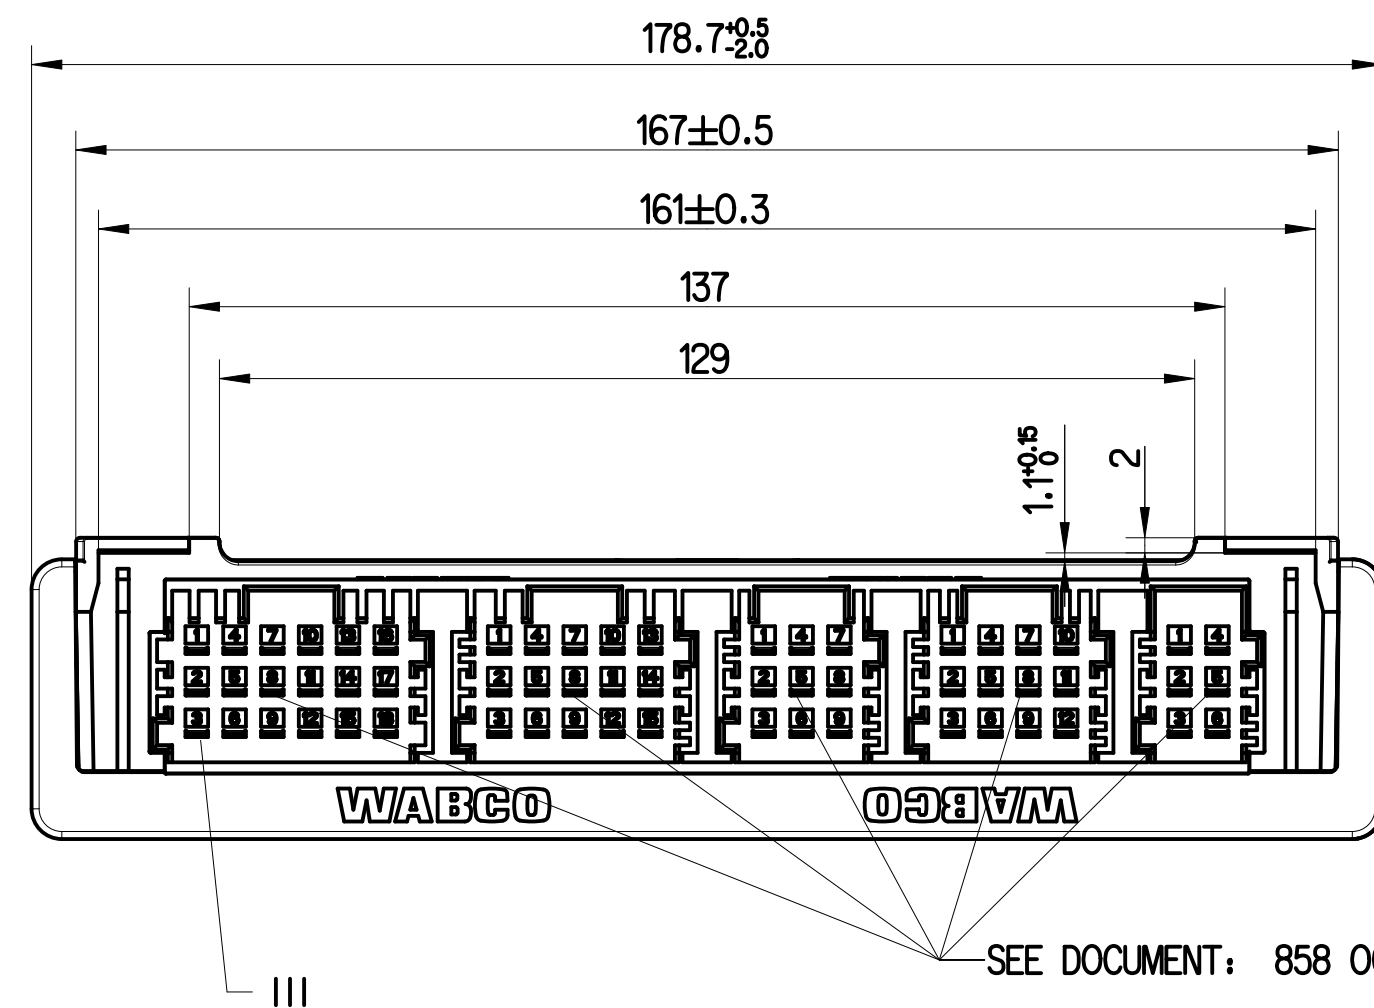


1		2
A	MATERIAL	SURFACE PROTECTION
	I Al 99	
	II PBT GF20	
	III CuSn0.15	Sn
	IV Steel 20MnB4	Zn-Ni
	V ACRYLATE	
	VI X10CrNi18-8	

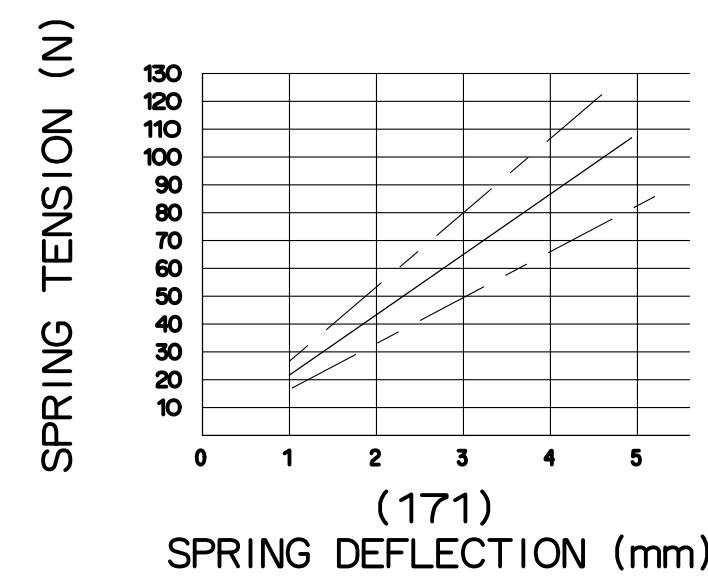

—SEE DOCUMENT: 858 000 648 4 (DOC. CODE 007)

PLUG CONNECTIONS IN ACCORDANCE WITH MB DESIGN RULE A 940 000 97 99

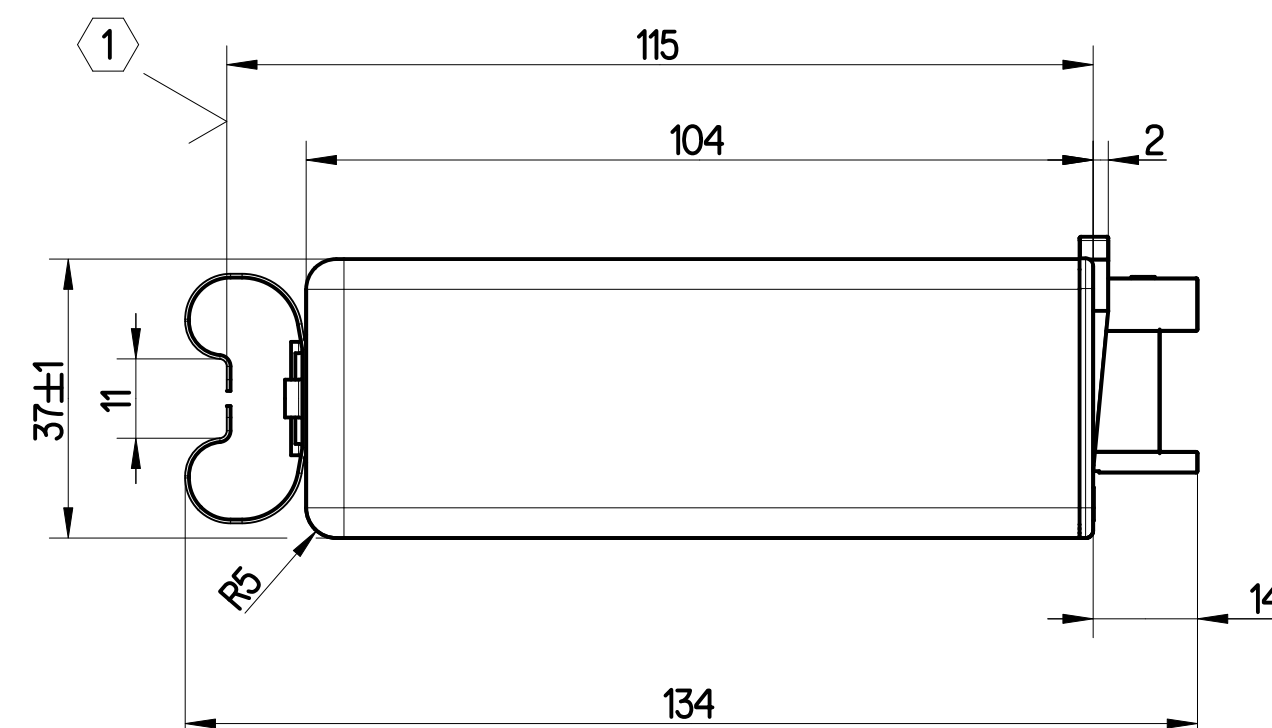

VOLTAGE: 20V...32V DC *

THERMAL RANGE OF APPLICATION: -40° ... +75° C

NON-OPERATING TEMPERATURE: -40° ... +90° C *




PROTECT TYPE: IP 30 (IEC 529)

MAX. CURRENT TERMINAL:15: 2mA MAX. CURRENT TERMINAL: 30ab: 24A

INSTALLATION POSITION: OPTIONAL

SOFTWARE VERSION: SEE CCT

LABELING INFORMATION	
No	FIELD DESCRIPTION
1	
2	WABCO - 16 - JED369
3	PRI
4	DATE OF MANUFACTURE (JED-226) week / year
5	SERIAL NUMBER
6	
7	WABCO IDENTIFICATION NUMBER
8	DEVICE IDENTIFICATION NAME
9	BARCODE ACC. TO ISO/IEC16390 INTERLEAVE 2 OF 5, WITHOUT CHECK DIGIT POS. 1-4; BARCODE HEADER POS. 5-10; SERIAL NUMBER
10	EMC HOMOLOGATION MARK
11	COUNTRY OF ORIGIN
12	
13	
	REFER TO DOC. CODE 922 FOR DETAILS

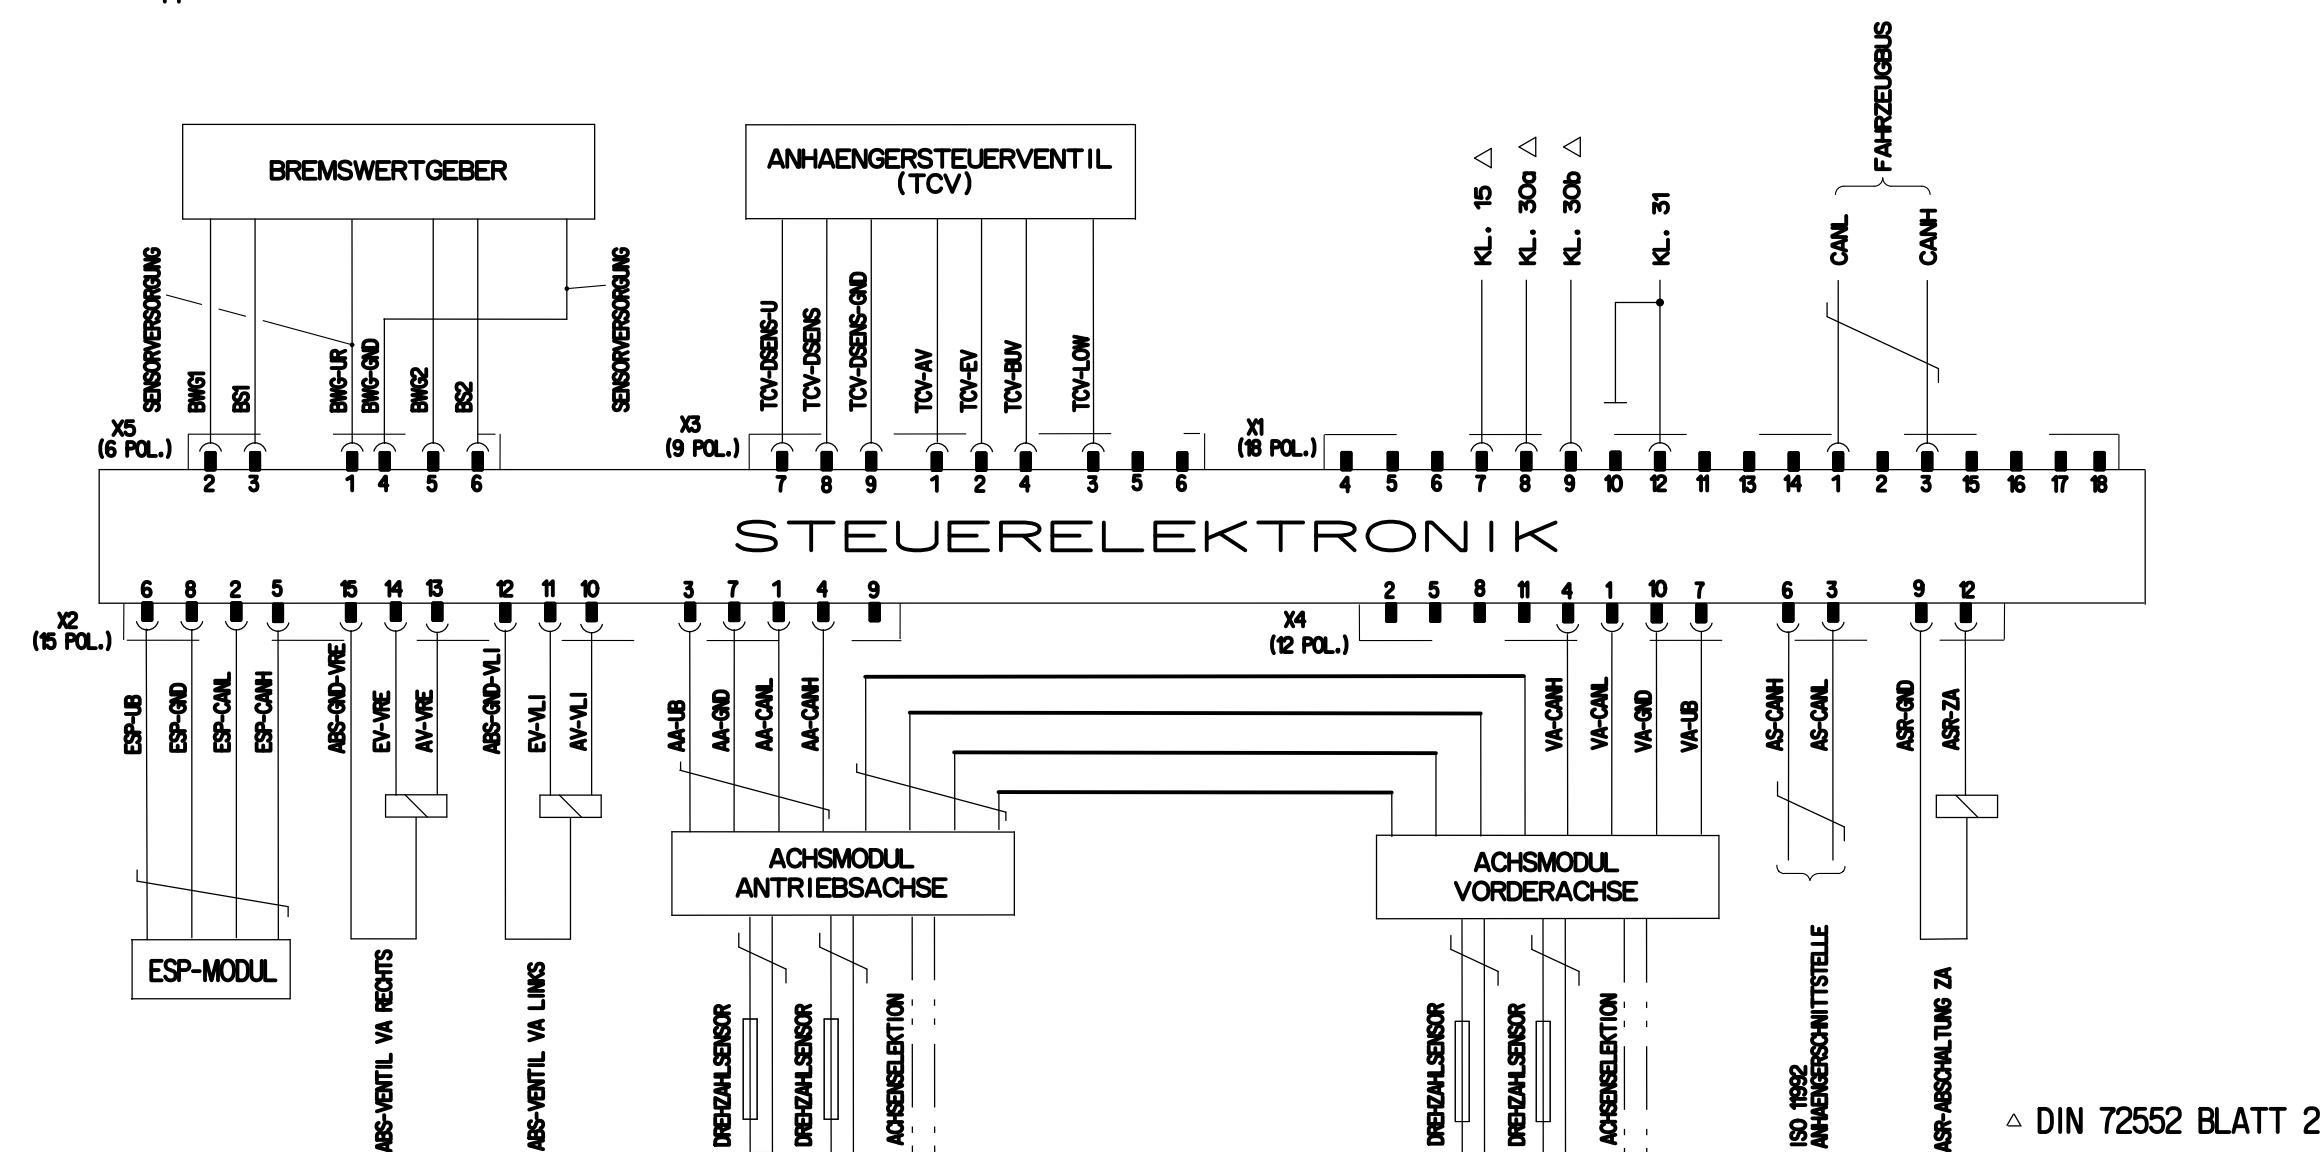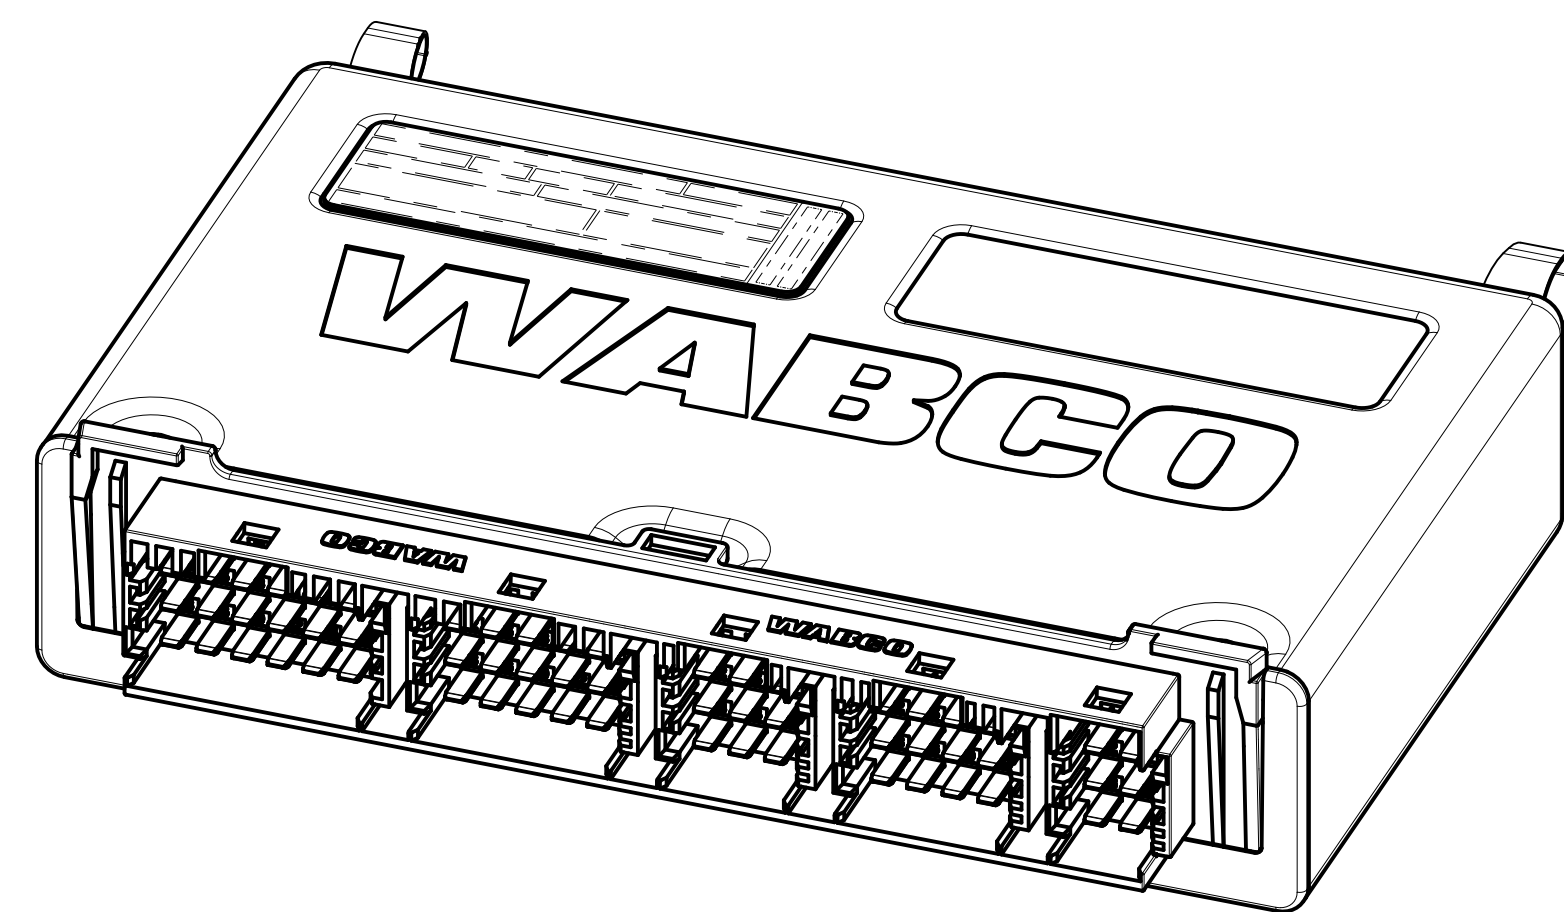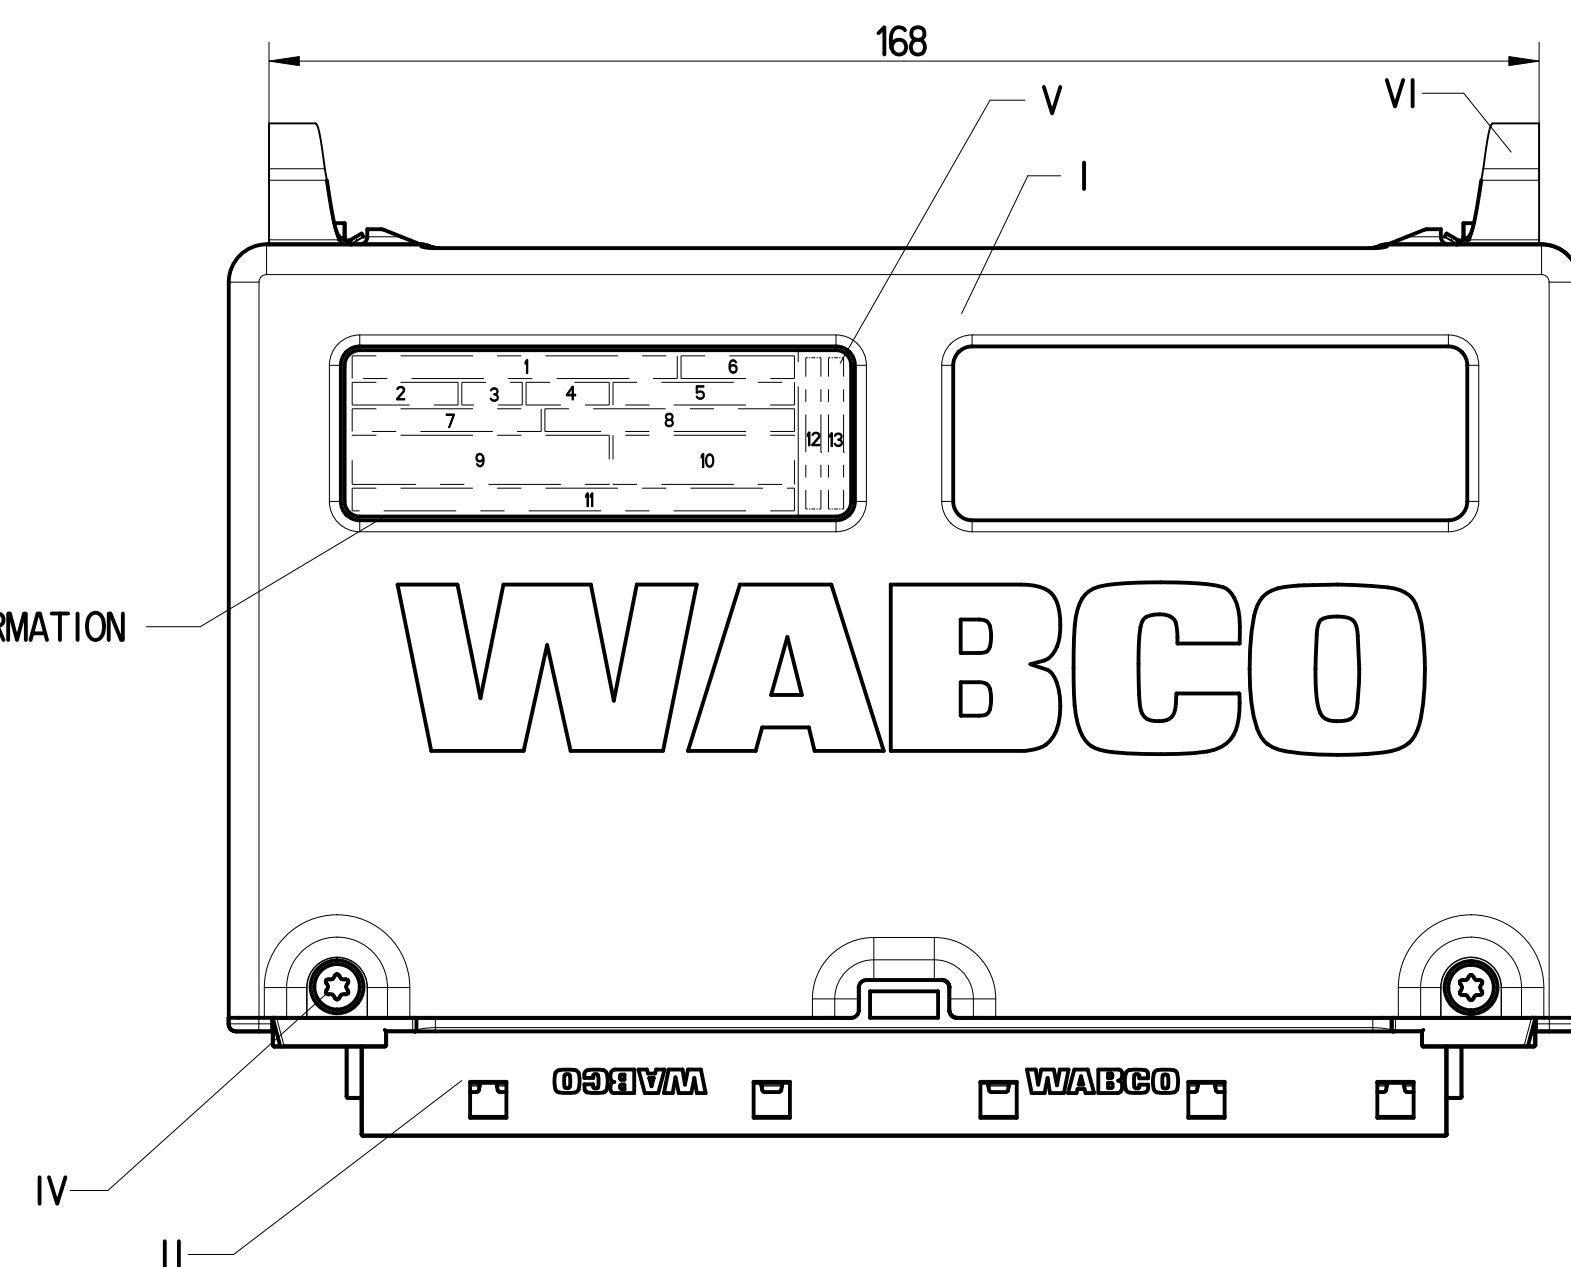

General Specification: ISO 8015, JED-334-1, Size ISO 14403 LP				Copyright ZF®			
Further Technical Data: Product Specification				Date	Signature		
Doc. Code: C35		Sheet: 1 To 37		2024-08-05	Pakula		
General Tolerances JED-261				Checked	Pawłowski		
Range of nominal dimensions in mm				ECU			
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
Fine	X	±0.5	±1	±1.5	±2	±3°	
Medium		±1	±2	±3	±4		
Coarse		±2	±3.5	±5	±6		
Mass				Scale		Material No.	
0.37 kg		1:1		446 139 213 0		Date of first issue: 2024-08-06	
Size				CAD System		Doc. Code Language Sheet	
A 1				CREO		005 EN 1/1	
Tapped Holes acc. -				ECH-No.		Revision	
1) Tolerance Class Applied Crossmarked				-		Tech. Resp.	
				-		6830_Asp	
				-		Replacement for	