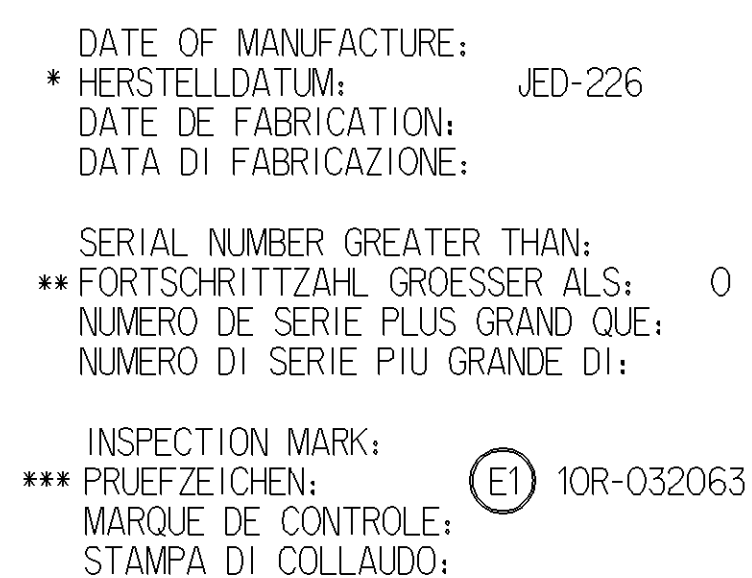
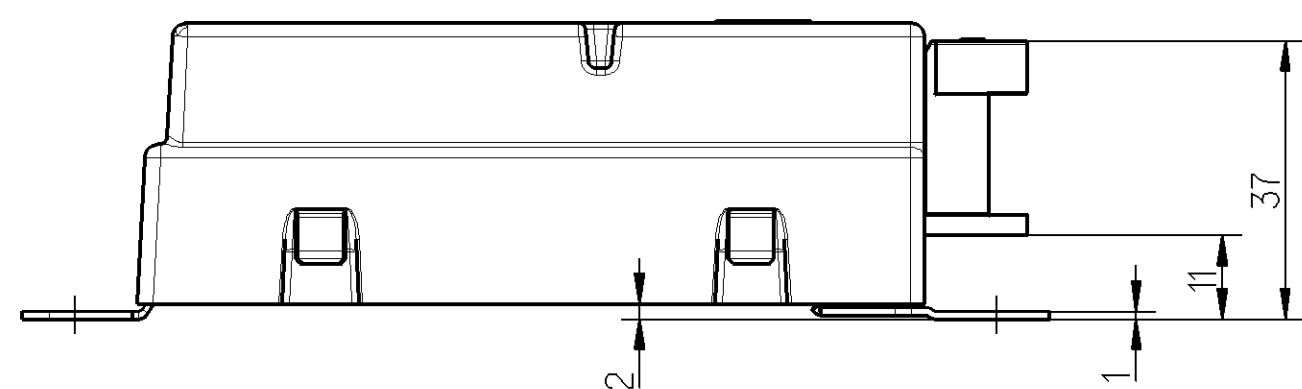


[illegible]

VOLTAGE:
SPANNUNG: 22 V ... 32 V DC
TENSION:
TENSIONE:

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40 °C ... +75 °C
GAMME D'APPLICATION THERMIQUE:
CAMPO TERMICO D'APPLICAZIONE:



STORAGE TEMPERATURE:
LAGERTEMPORATUR: -40 °C ... +90 °C
TEMPERATURE DE STOCKAGE:
TEMPERATURA DI IMMAGAZZINAMENTO:

DEGREE OF PROTECTION:
SCHUTZART: IP 30 (IEC 529)
DEGRE DE PROTECTION:
GRADO DI PROTEZIONE:

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION:
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
(INDEX BEACHTEN): 446 170 225 0 (DOC. CODE 435)
POUR AUTRES DONNEES TECHNIQUES VOIR SPECIFICATION DU PRODUIT:
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO:

FINISHING VARNISH ON THE PRINTED BOARD:
UEBERZUGSLACK AUF DER LEITERPLATTE: JED-543
VERNIS ENDUIT SUR CARTE IMPRIMEE:
VERNICE DI RIVESTIMENTO SULLA PIASTRA STAMPTA:

INSTALLATION POSITION:
EINBAULAGE:
POSITION D'INSTALLATION:
POSIZIONE DI MONTAGGIO:

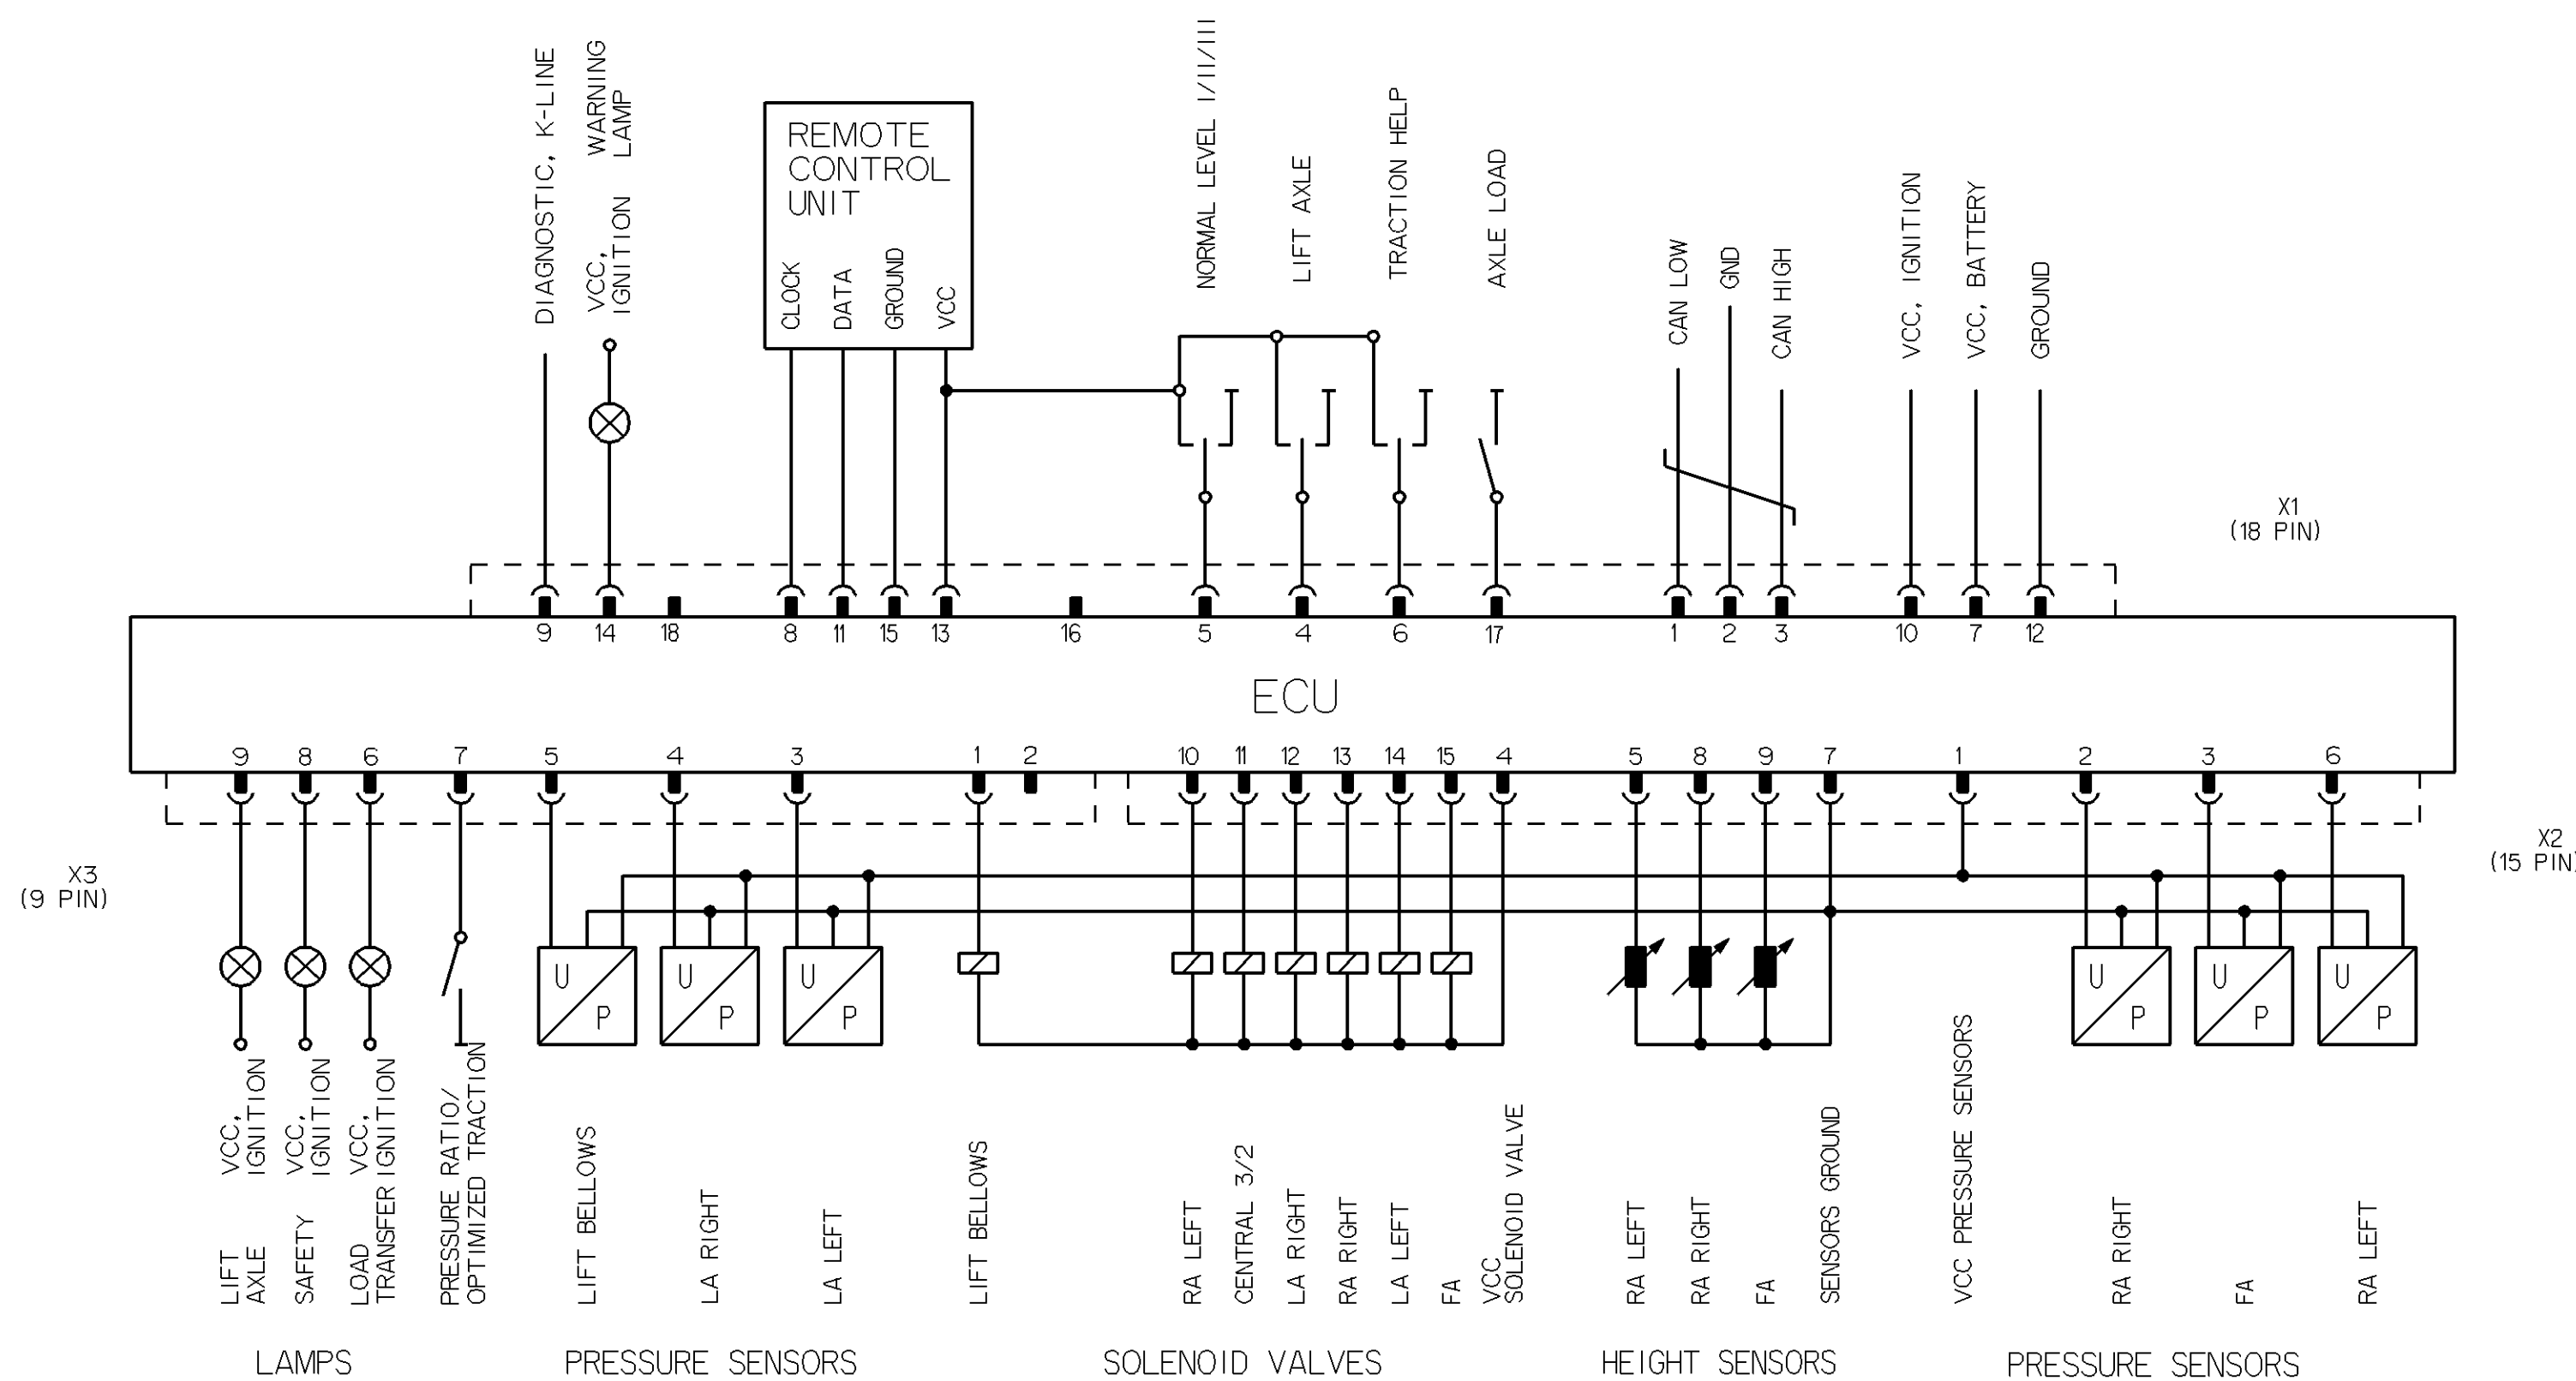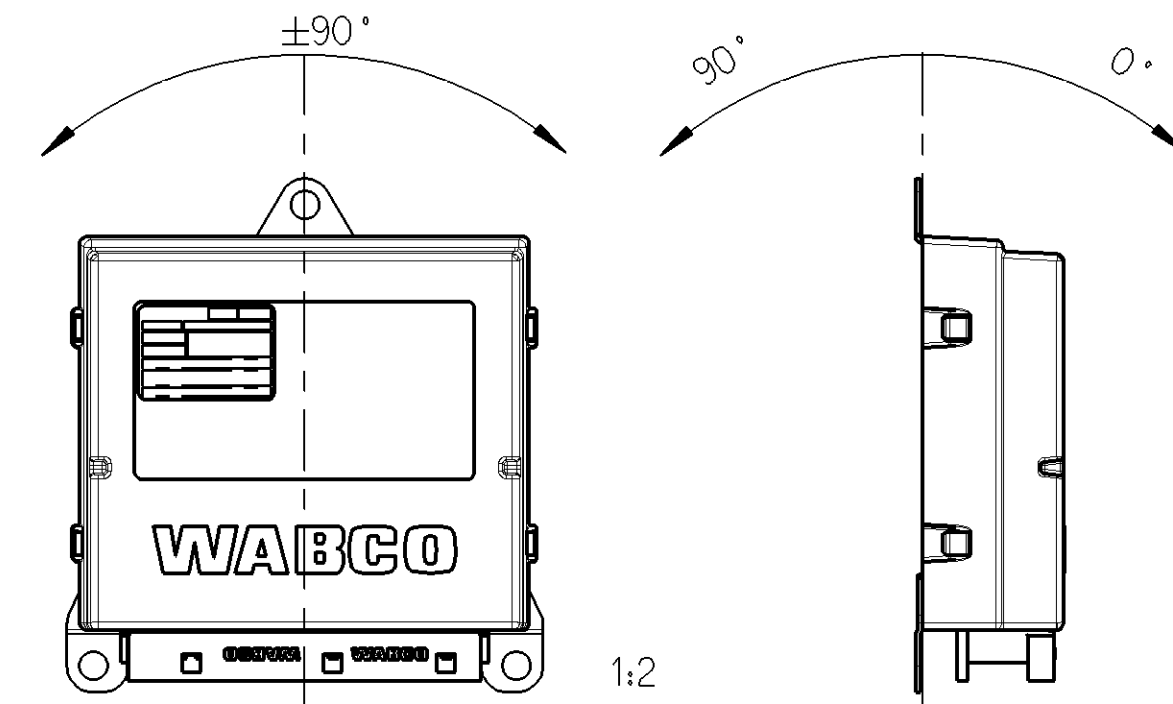

General Specification: JED-334-0 , Size 150 1440S-1 E				Copyright WABCO®		WABCO			
Further Technical Data:				Date		Drawn		Signature	
Doc. Code		Sheet		To		2012-09-27		Slowski	
General Tolerances JED-261						Checked		2012-09-27	
Range of Nominal Dimensions (± mm)						Lentz		ELECTRONIC ELEKTRONIK ECAS 6x2 CAN ELECTRONIQUE ELETTRONICA	
Class 1) ≤ 50 > 50 ≤ 180 > 180 > 400						Expert			
						LENTZ			
Fine 0,5 1,0 1,5 2,0						Maternal No.		Date of first issue 2012-09-27	
Medium X 1,0 2,0 3,0 4,0						0.280 1:1 (1:2)		Doc.Code Language Sheet	
Coarse 2,0 3,5 5,0 6,5						446 170 225 0		005 ML 1/1	
Tapped Holes acc.						Size CAD System			
1) Tolerance Class Applied Crossmarked						A 1 Pro/E		ECN-No. Revision Techn. Resp. Replacement for	
						-		- 6650 446 170 217 0	