
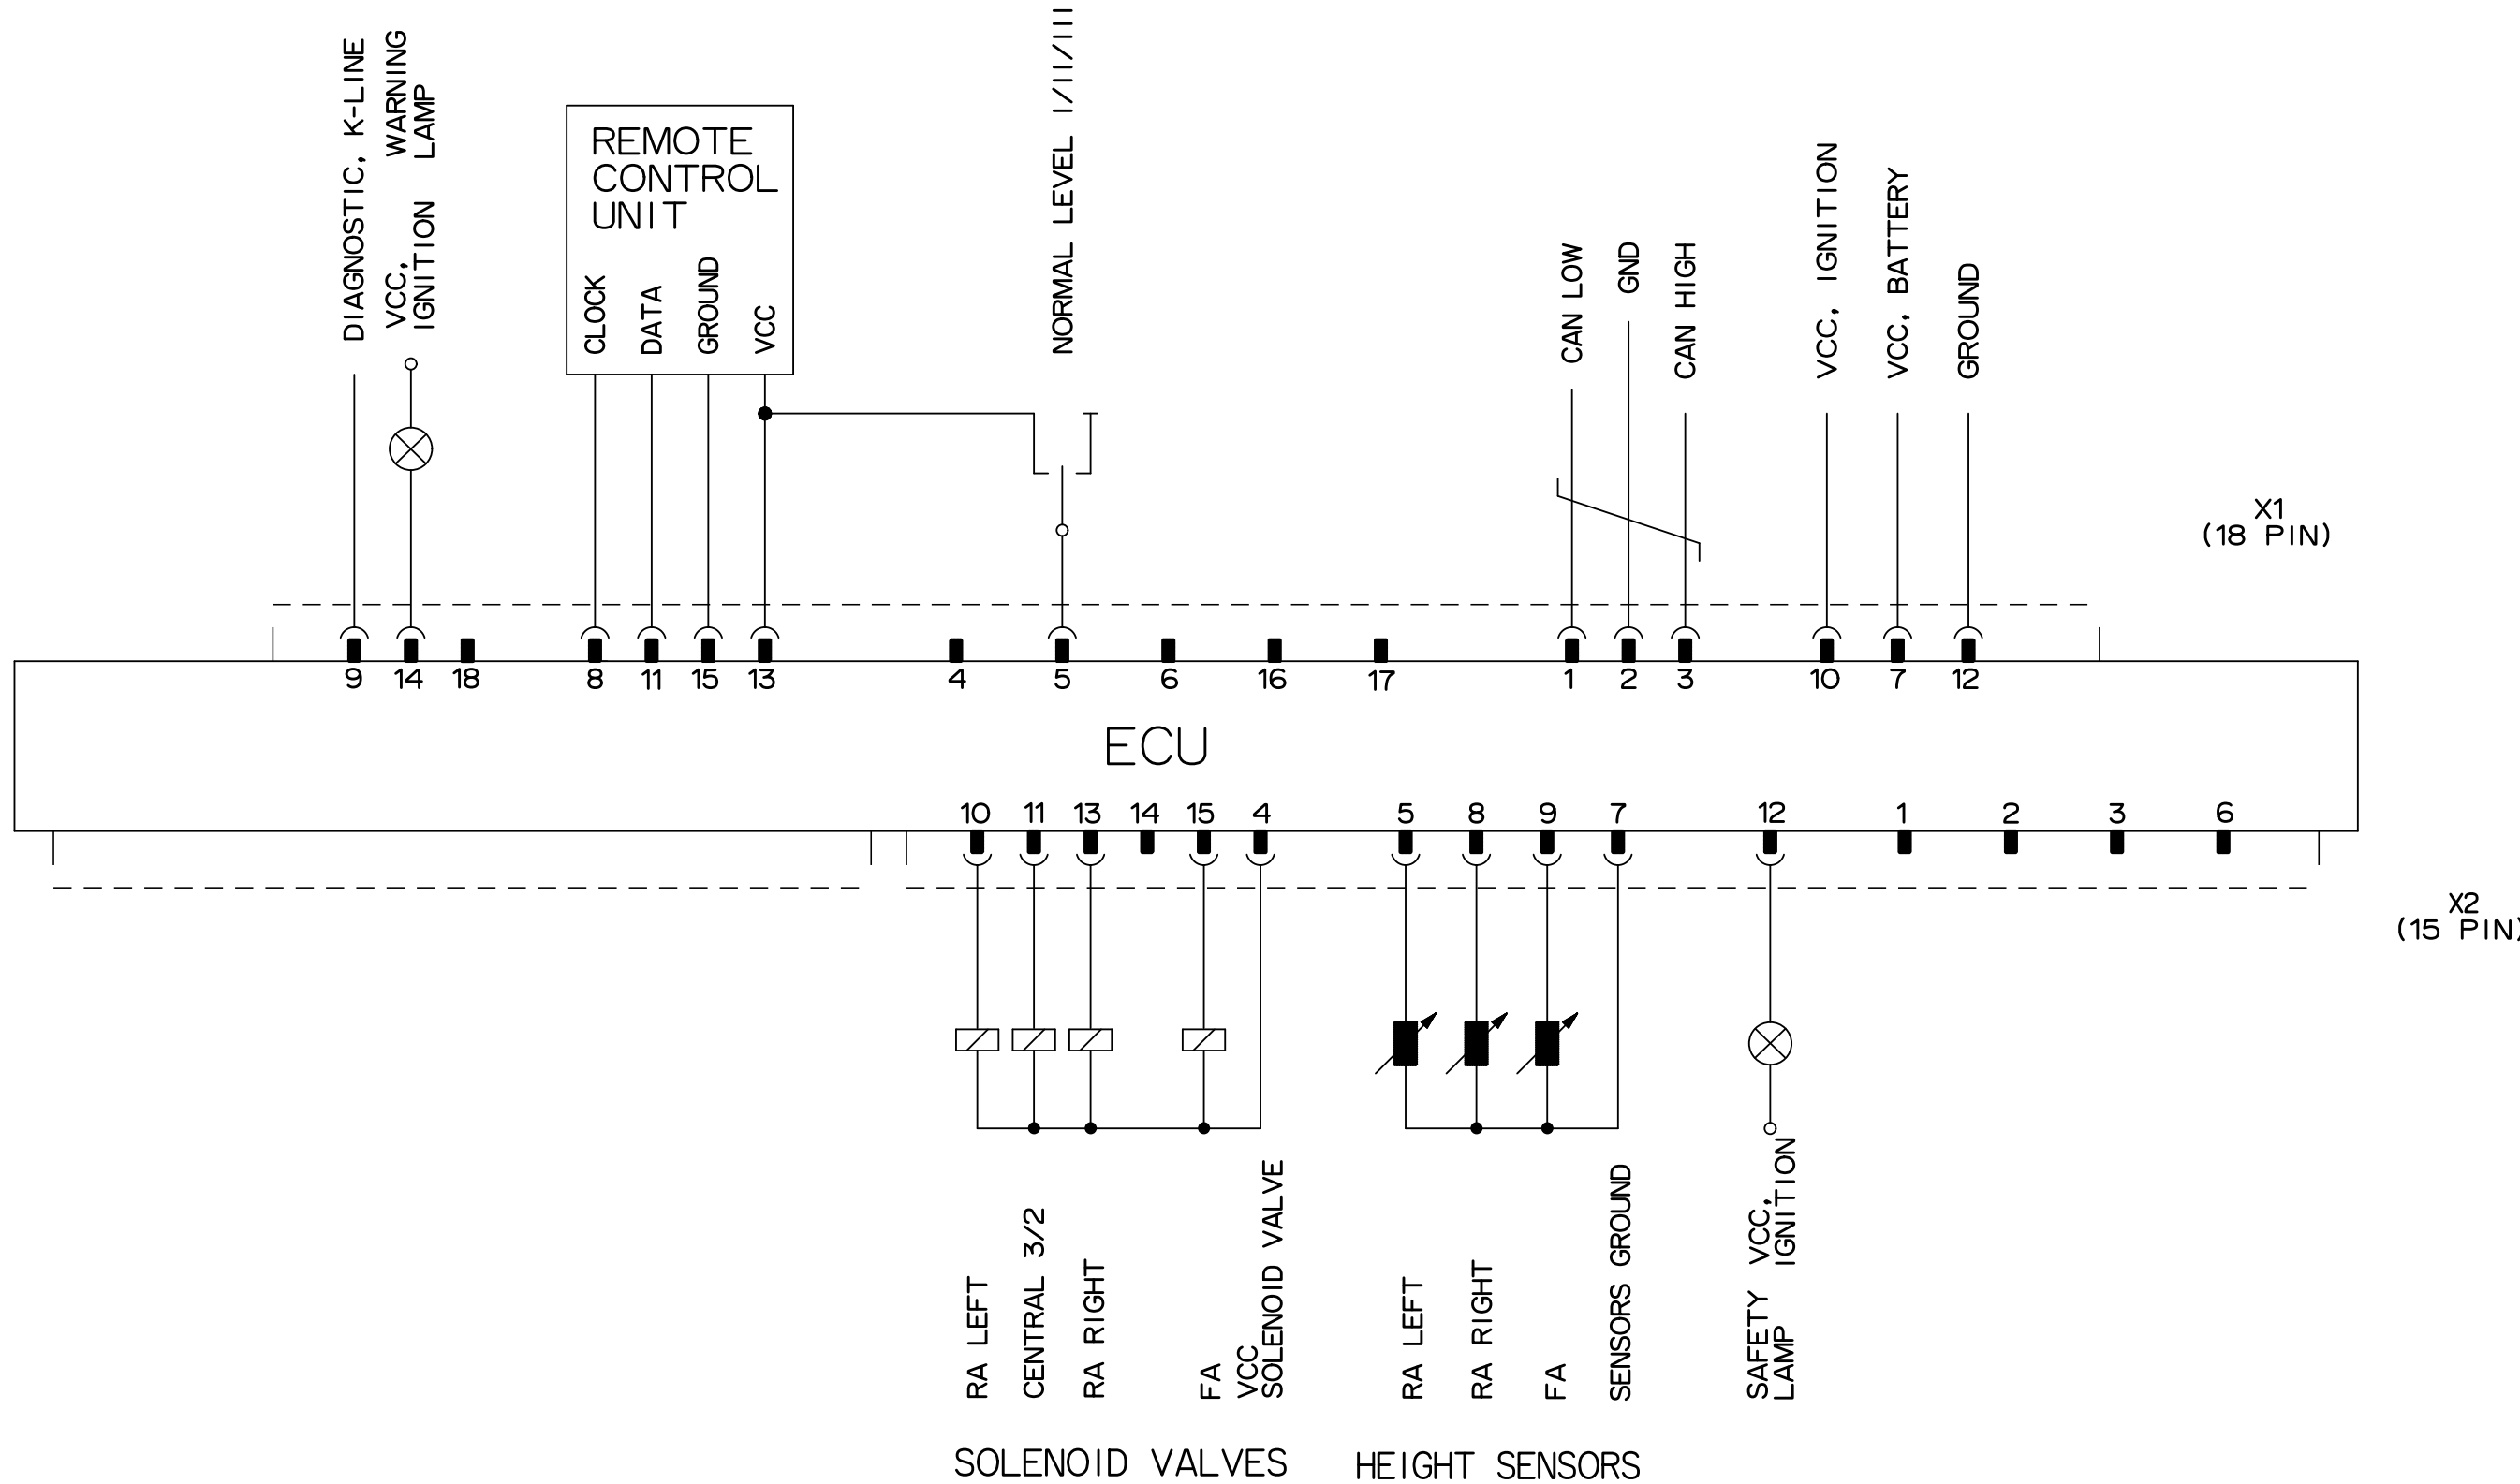
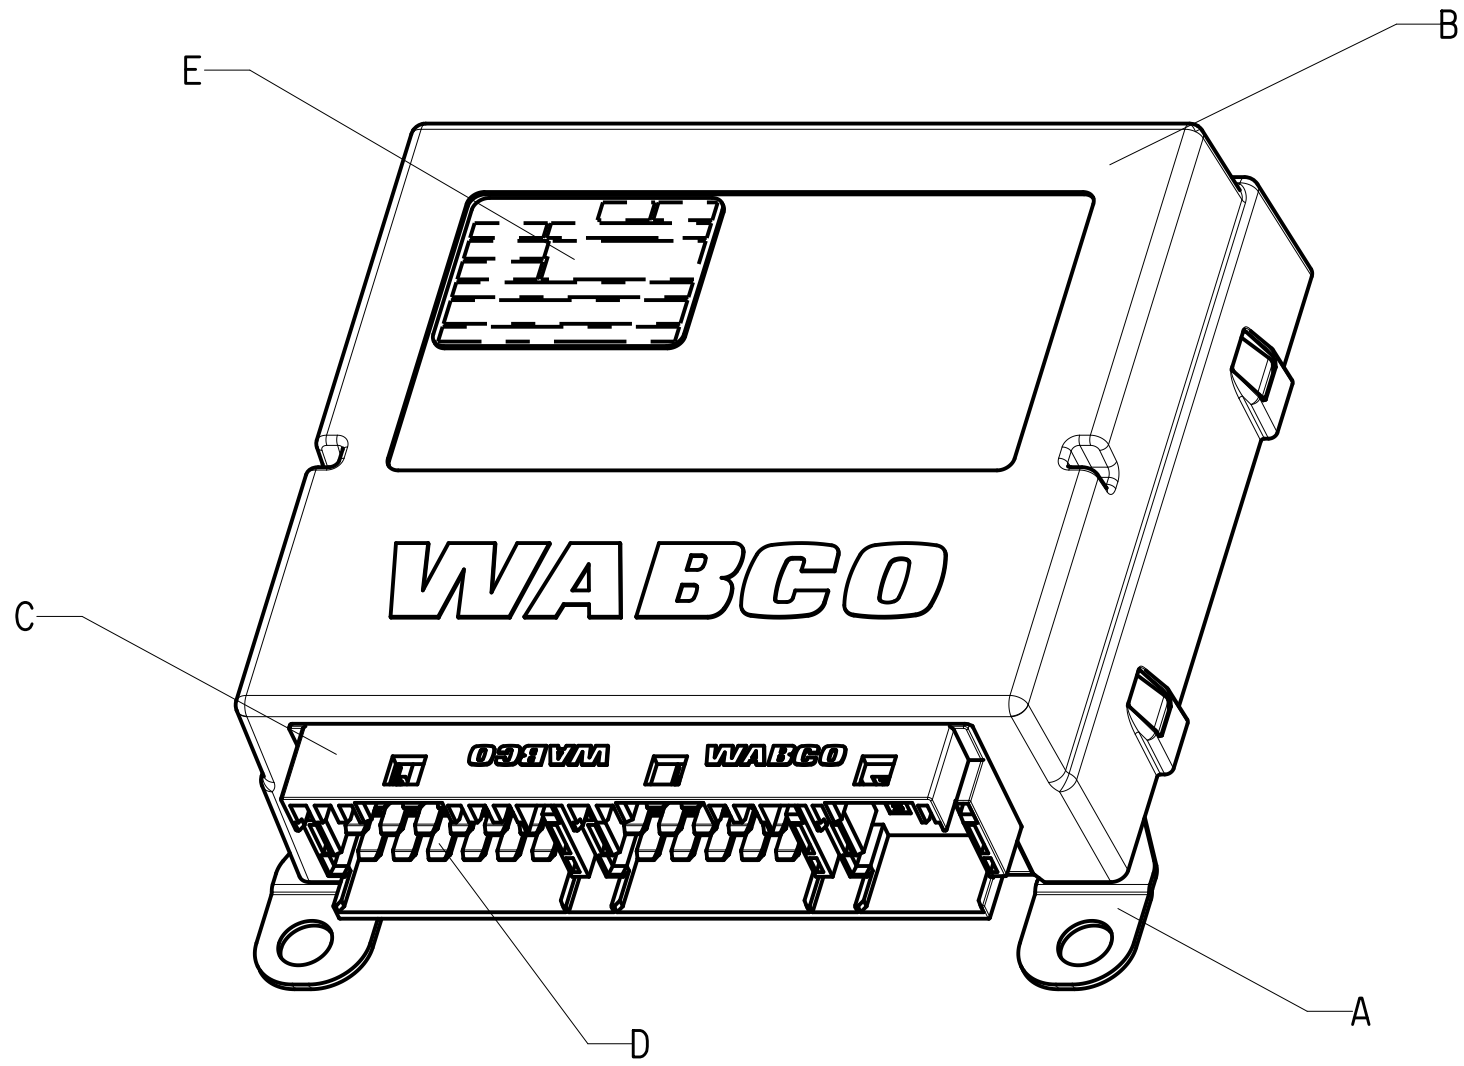
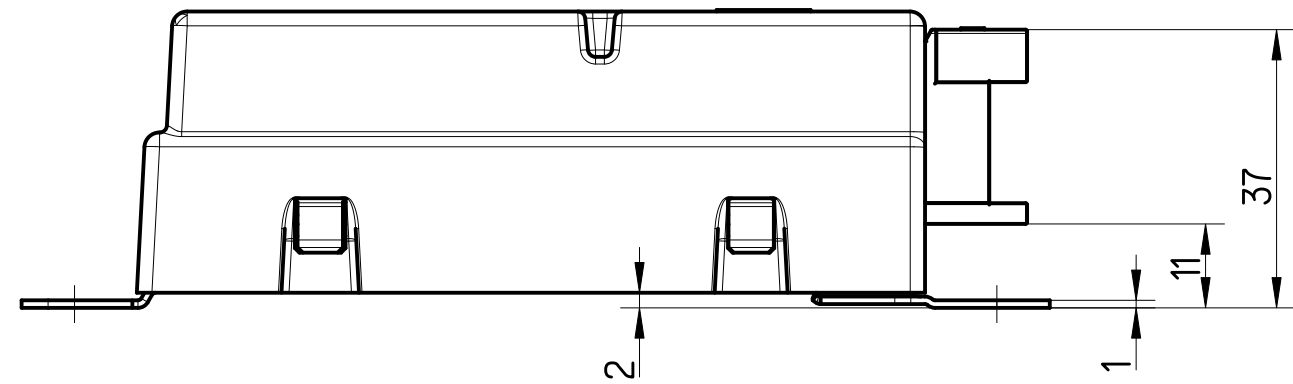


Tout le contenu de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite de WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de WABCO est formellement interdite. Toute violation de ces droits de propriété intellectuelle sera poursuivie en justice. Alle Rechte für den Fall der Patentverletzung oder Patentschutzverletzung vorbehalten.

Non è permesso copiare o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto di WABCO. È vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto di WABCO. Qualsiasi violazione di questi diritti di proprietà intellettuale sarà perseguita legalmente. Alle Rechte für den Fall der Patentverletzung oder Patentschutzverletzung vorbehalten.

Copyright of this document and giving it to others and the use or communication of the content thereof, are forbidden without express written permission of WABCO. Any unauthorized reproduction or use of this document without the written permission of WABCO is expressly prohibited. Any violation of these rights of intellectual property will be pursued in court. This document is the subject of copyright.

A	ZINC COATED STEEL	JED-585-2
B	ABS	JED-465-5
C	PBT GF20	JED-375-1
D	TIN-PLATED COPPER	JED-570-545
E	POLYESTER	

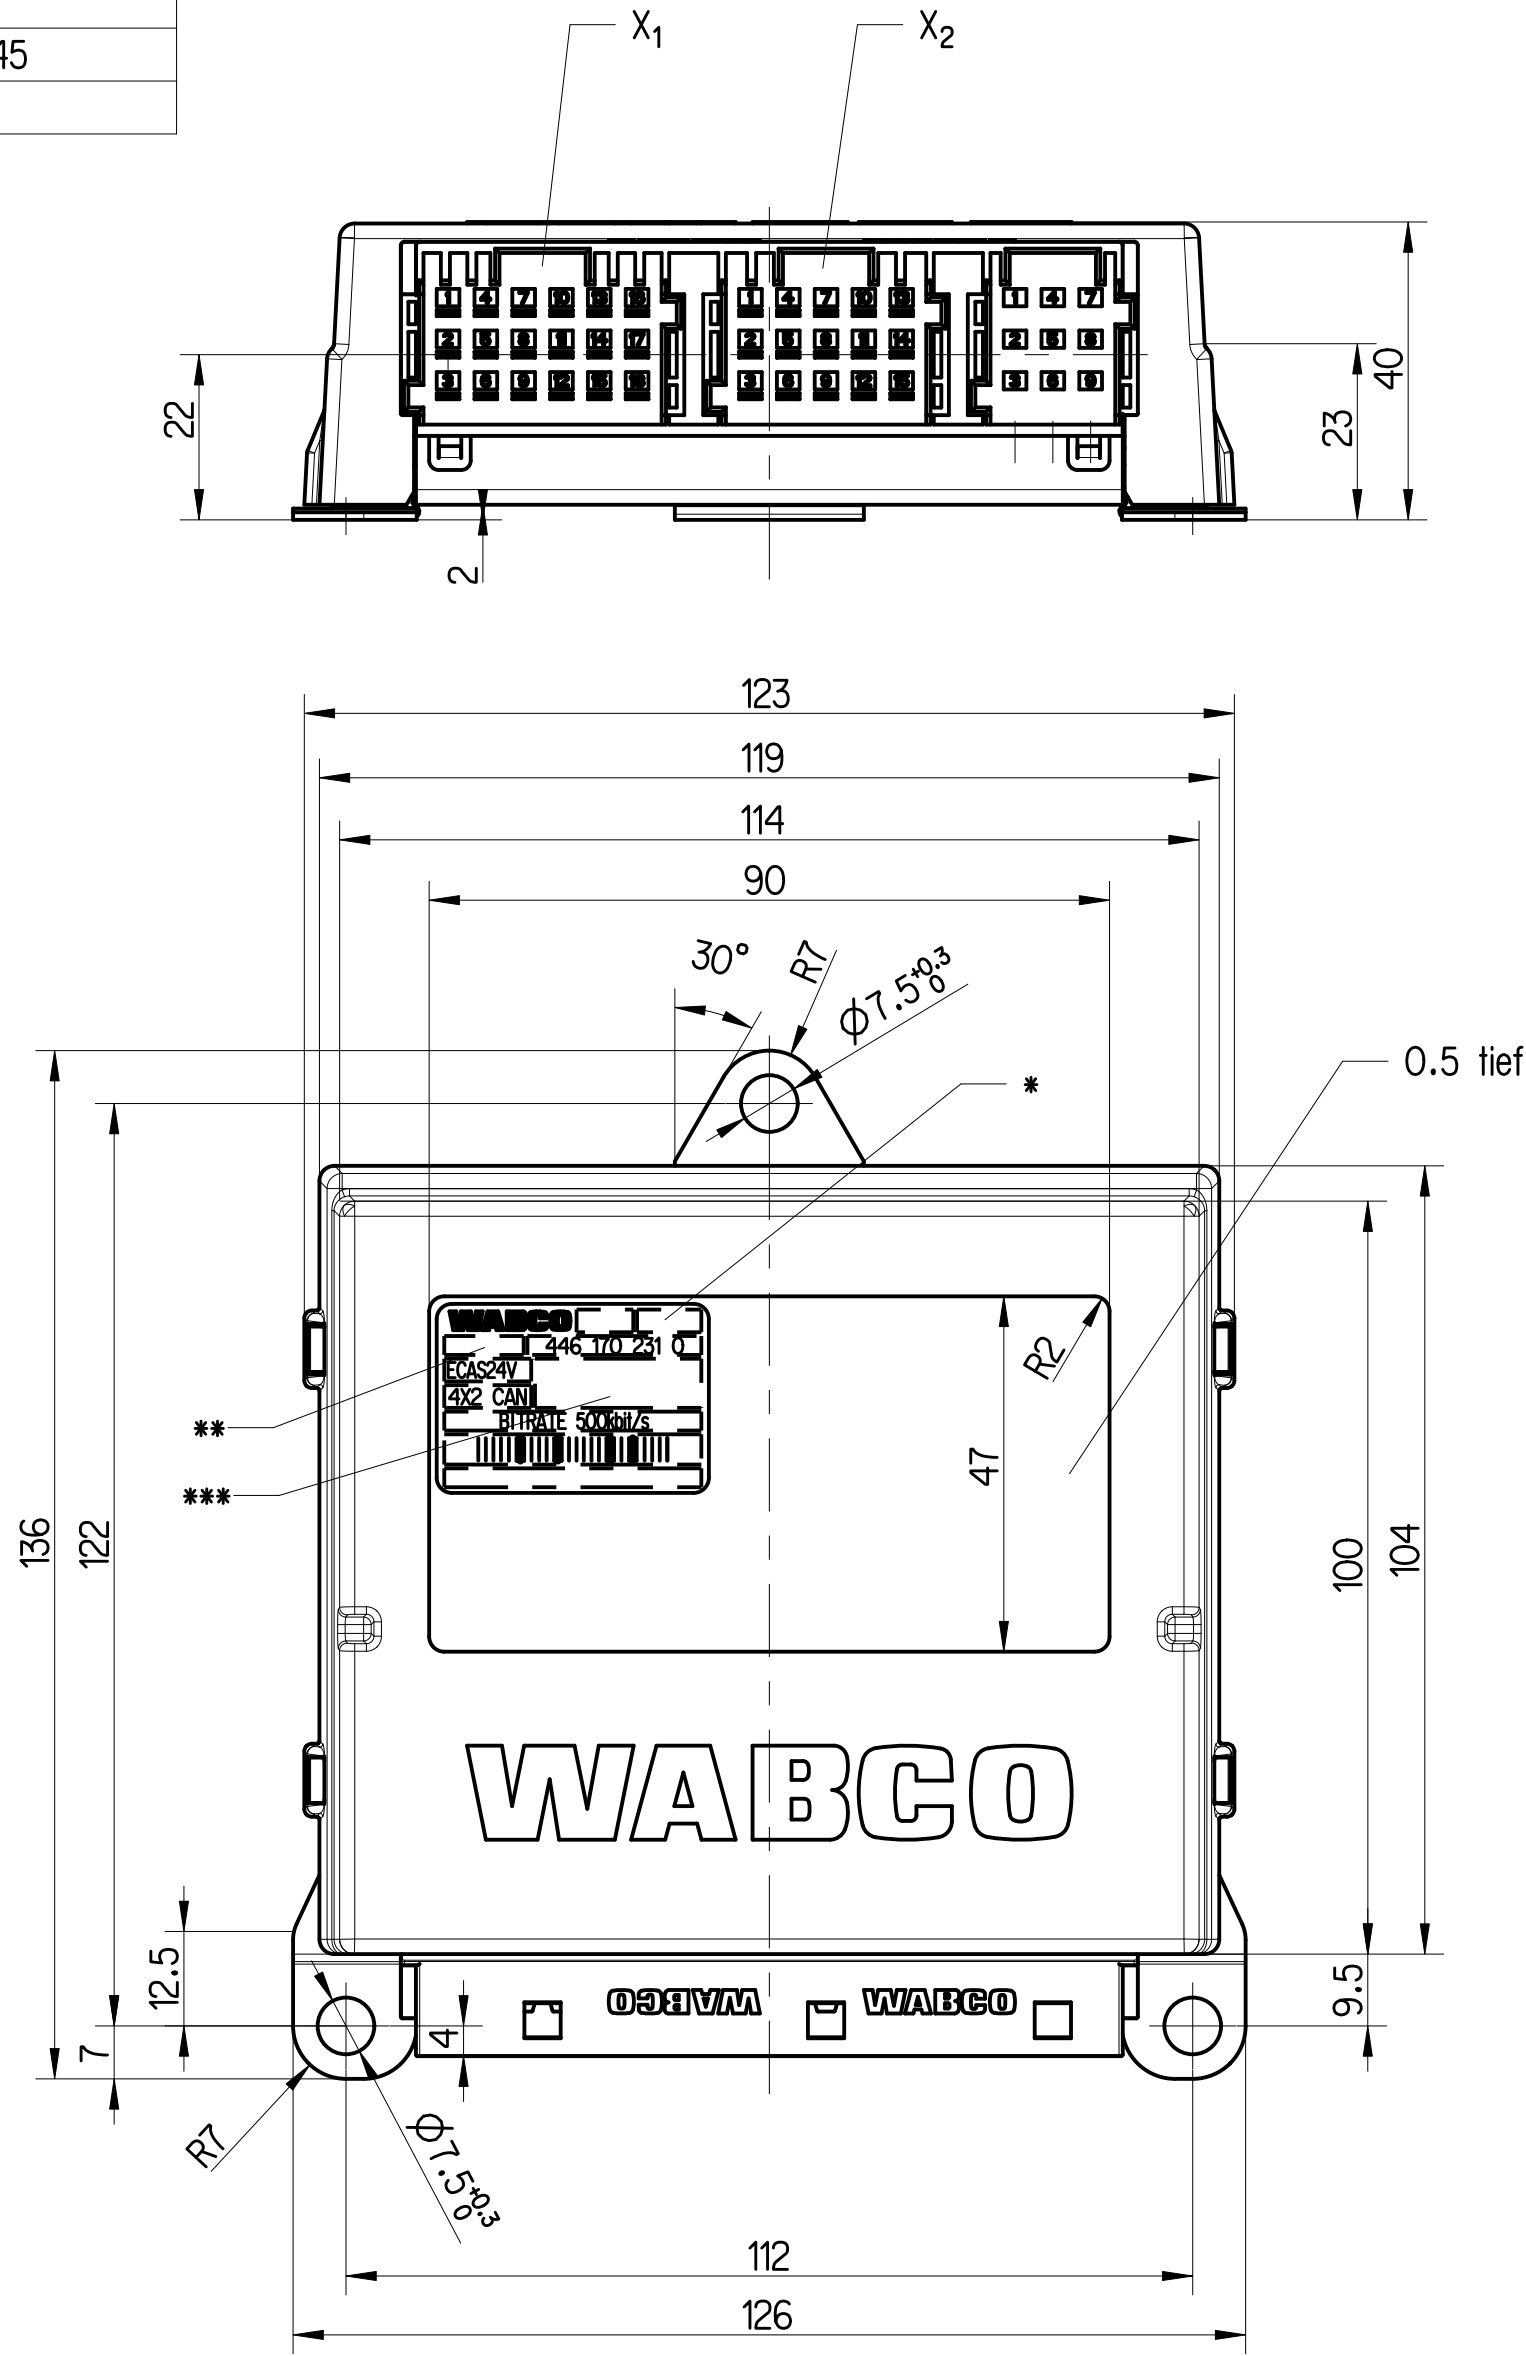

DATE OF MANUFACTURE:
* HERSTELLDATUM: JED-226
DATE DE FABRICATION:
DATA DI FABRICAZIONE:

SERIAL NUMBER GREATER THAN:
** FORTSCHRITTZAHL GRÖßER ALS: 0
NUMERO DE SERIE PLUS GRAND QUE:
NUMERO DI SERIE PIU GRANDE DI:

INSPECTION MARK:
*** PRUEFZEICHEN: (E1) 10R-062063 (B)
MARQUE DE CONTROLE:
STAMPA DI COLLAUDO:

VOLTAGE:
SPANNUNG: 22 V ... 32 V DC
TENSION:
TENSIONE:

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40 °C ... +75 °C
GAMME D'APPLICATION THERMIQUE:
CAMPO TERMICO D'APPLICAZIONE:


STORAGE TEMPERATURE:
LAGERTEMPORATUR: -40 °C ... +90 °C
TEMPERATURE DE STOCKAGE:
TEMPERATURA DI IMMAGAZZINAMENTO:

DEGREE OF PROTECTION:
SCHUTZART: IP 30 (IEC 529)
DEGRE DE PROTECTION:
GRADO DI PROTEZIONE:

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION:
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION (INDEX BEACHTEN): 446 170 231 0 (DOC. CODE 035)
POUR AUTRES DONNEES TECHNIQUES VOIR SPECIFICATION DU PRODUIT:
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO:

FINISHING VARNISH ON THE PRINTED BOARD:
UEBERZUGSLACK AUF DER LEITERPLATTE: JED-543
VERNIS ENDUIT SUR CARTE IMPRIMEE:
VERNICE DI RIVESTIMENTO SULLA PIASTRA STAMPTA:

INSTALLATION POSITION:
EINBAULAGE:
POSITION D'INSTALLATION:
POSIZIONE DI MONTAGGIO:

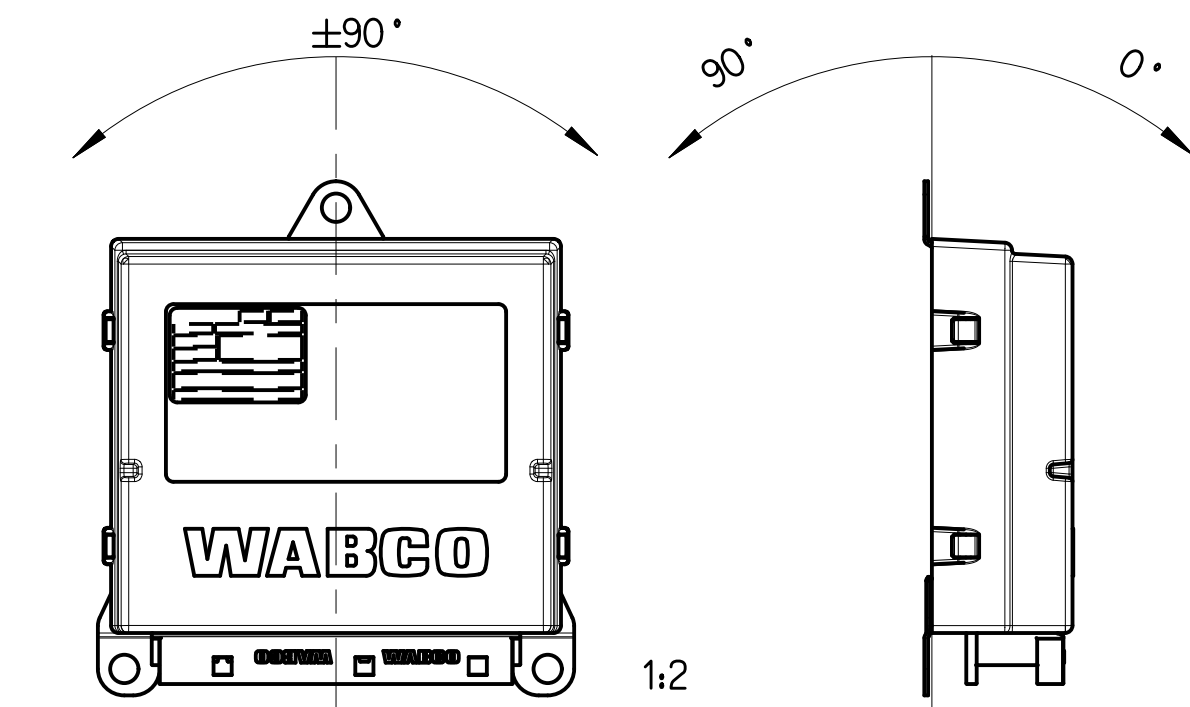

General Specification: JED-334-0		Copyright WABCO®		WABCO ELECTRONIC ELEKTRONIK ECAS 4x2 CAN 500kBit/s ELECTRONIQUE ELETTRONICA	
Further Technical Data:		Date	Signature		
Doc. Code:	Sheet: To	2025-09-16	Heyda		
General Tolerances JED-261		2025-09-25	Lucas		
Range of Nominal Dimensions (± mm)		Expert			
Class	1)	> 50	> 180	> 400	
		> 50	> 180	> 400	
Fine	X	0.5	1.0	1.5	2.0
Medium	X	1.0	2.0	3.0	4.0
Coarse	X	2.0	3.5	5.0	6.5
Tapped Holes acc.		JOVERS			
1) Tolerance Class Applied Crossmarked		Mass	Scale	Material No.	Date of first issue: 2014-11-20
		0.280	1:1 (1/2)	446 170 231 0	Doc.Code Language Sheet
		Size	CAD System		
		A 1	Pro/E		005 ML 1/1
		ECN-No.		Revision	Tech. Resp.
		517727		1x B	6650
				Replacement for	