

<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0





VOLTAGE:
SPANNUNG: 24V $\pm$ 8V DC
VOLTAGE:
VOLTAGGIO:

DEGREE OF PROTECTION PROVIDED BY ENCLOSURE:
COMPLETE DEVICE WITH MOUNTED CONNECTOR SOCKET:
SCHUTZART: IP6K6, IP6K7, IP6K9K *


KOMPLETTES GERÄT MIT MONTIERTER STECKVERBINDUNG: ISO 20653
MODE DE PROTECTION:
APPAREIL COMPLET AVEC L'ACCOUPLEMENT:
MODULO DI PROTEZIONE:
APPARECCHIO COMPLETO CON ACCOPIAMENTO MONTATO:

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40 °C ... +80 °C
GAMME D'APPLICATION THERMIQUE:
CAMPO TERMICO D'APPLICAZIONE:

NON-OPERATING TEMPERATURE
TEMPERATUR AUßER BETRIEB -40...+90 °C *
TEMPERATURE HORS FONCTIONNEMENT MAX 100 °C FOR 2h
TEMPERATURA FUORI ESERCIZIO

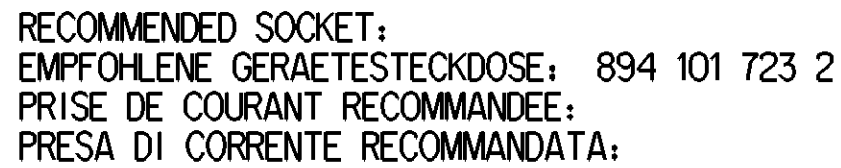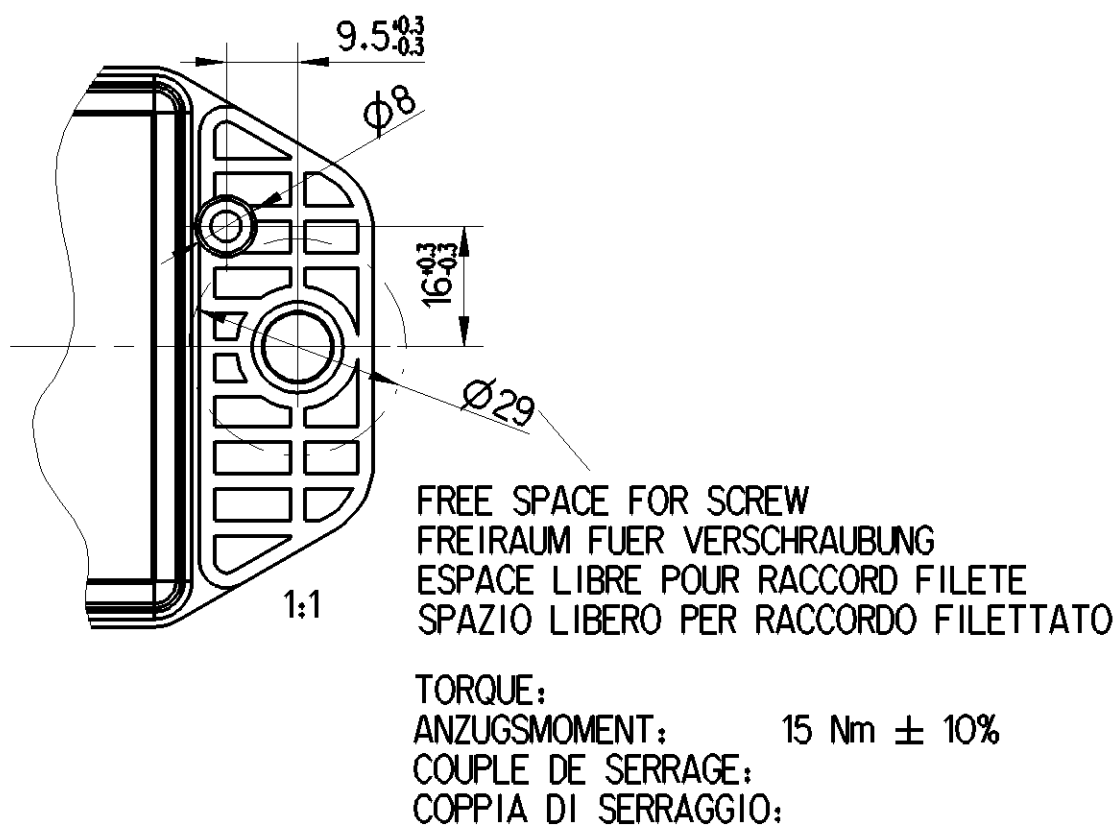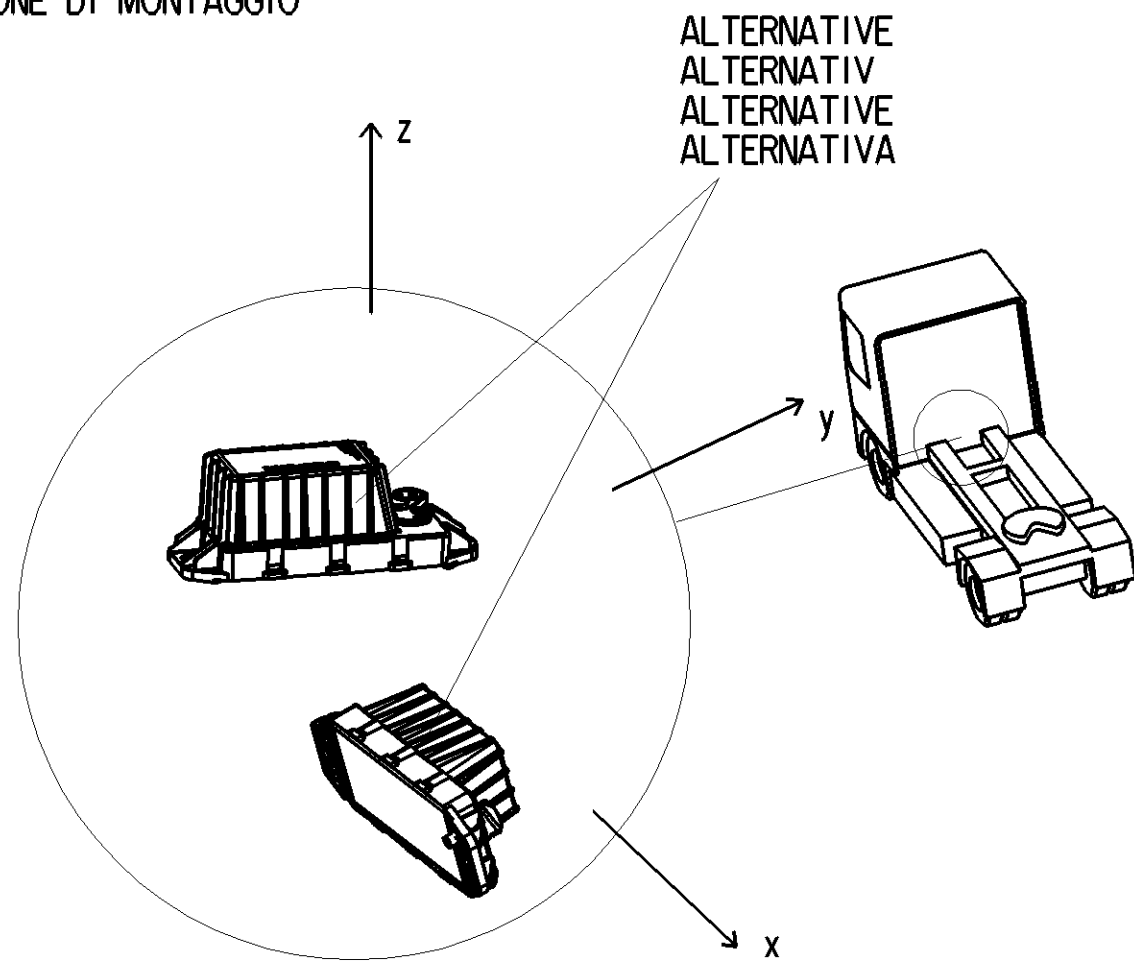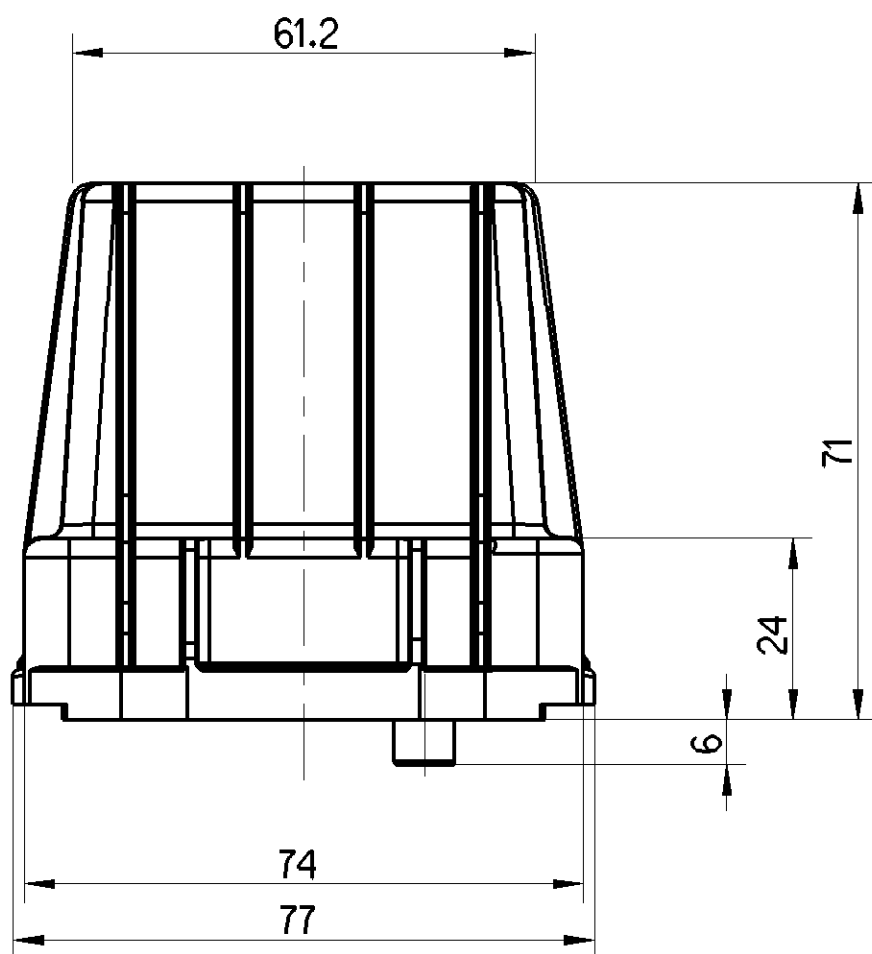

PORT ANSCHLUSS	PORT ATTACCO	FUNCTION FUNKTION	FUNCTION FUNZIONE
1		CAN LOW CAN LOW	CAN LOW CAN LOW
2		NOT CONNECTED NICHT BELEG	NE PAS CONNECTE NON COLLEGATO
3		GROUND MASSE	MASSE MASSA
4		NOT CONNECTED NICHT BELEG	NE PAS CONNECTE NON COLLEGATO
5		IGNITION ZUENDUNG	ALLUMAGE ACCENSIONE
6		CAN HIGH CAN HIGH	CAN HIGH CAN HIGH
7		UB UB	UB UB

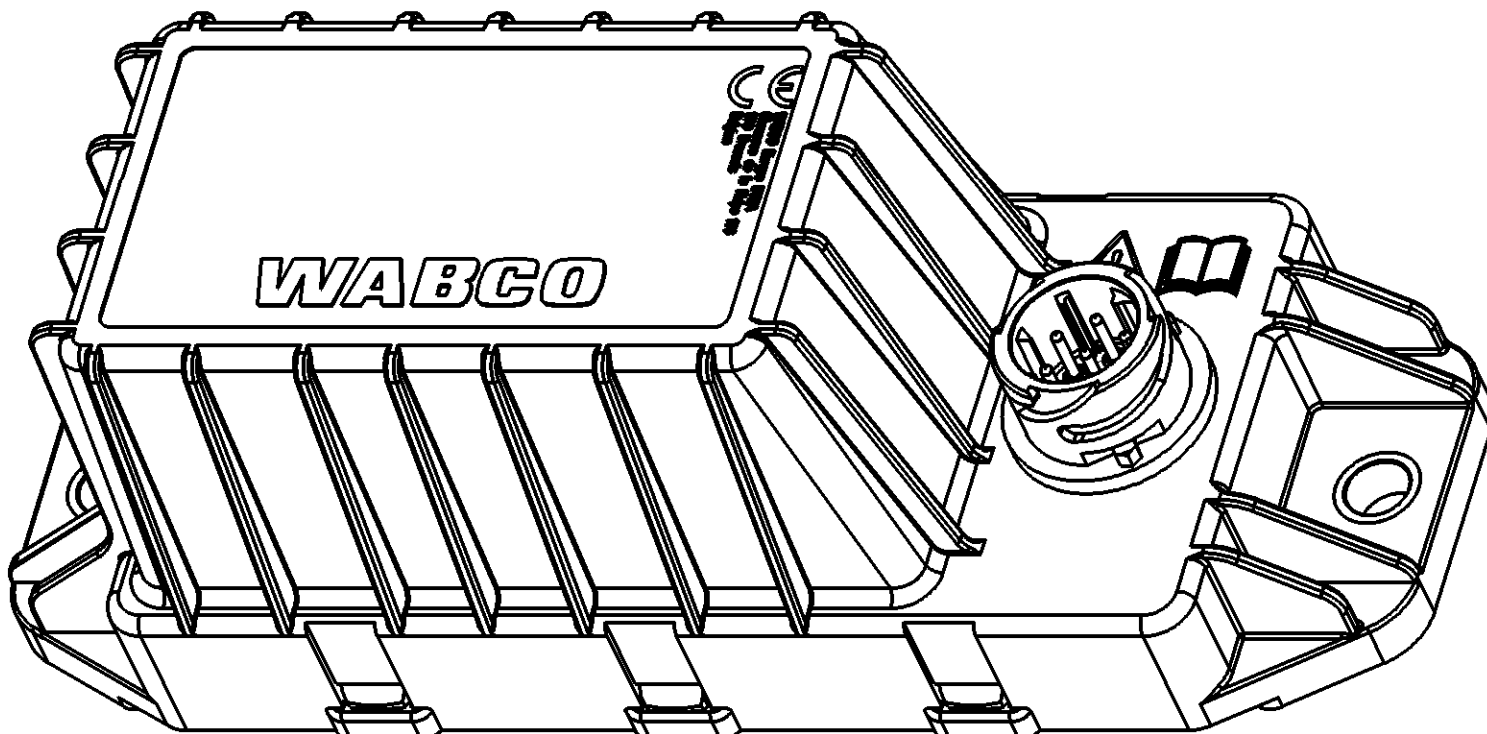

General Specification: JED-334-1, Size 130-1440S LP					Copyright WABCO®		WABCO		
Further Technical Data:					Date		Signature		
Doc. Code:		Sheet:		To		Drawn		ELECTRONIK IVTM TRUCK VOLVO	
General Tolerances JED-261					2017-12-08		Colombiowski		
Range of Nominal Dimensions (± mm)					Checked		Cornelius		
					Expert				
					Belczocko				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	△	Mass	Material No.		Date of first issues
Fine		0,5	1,0	1,5	2,0	0.320	1:1		Doc.Code
Medium	X	1,0	2,0	3,0	4,0	KG	446 220 011 0		Language
Coarse		2,0	3,5	5,0	6,5	Size	CAD System		Sheet
									005
									ML
									1/1
Tapped Holes acc.									
1) Tolerance Class Applied Crossmarked									
A 1		CREO				ECN-No.		Revision	Techn. Resp.
						174779		1	G
								6031	884 907 367 0