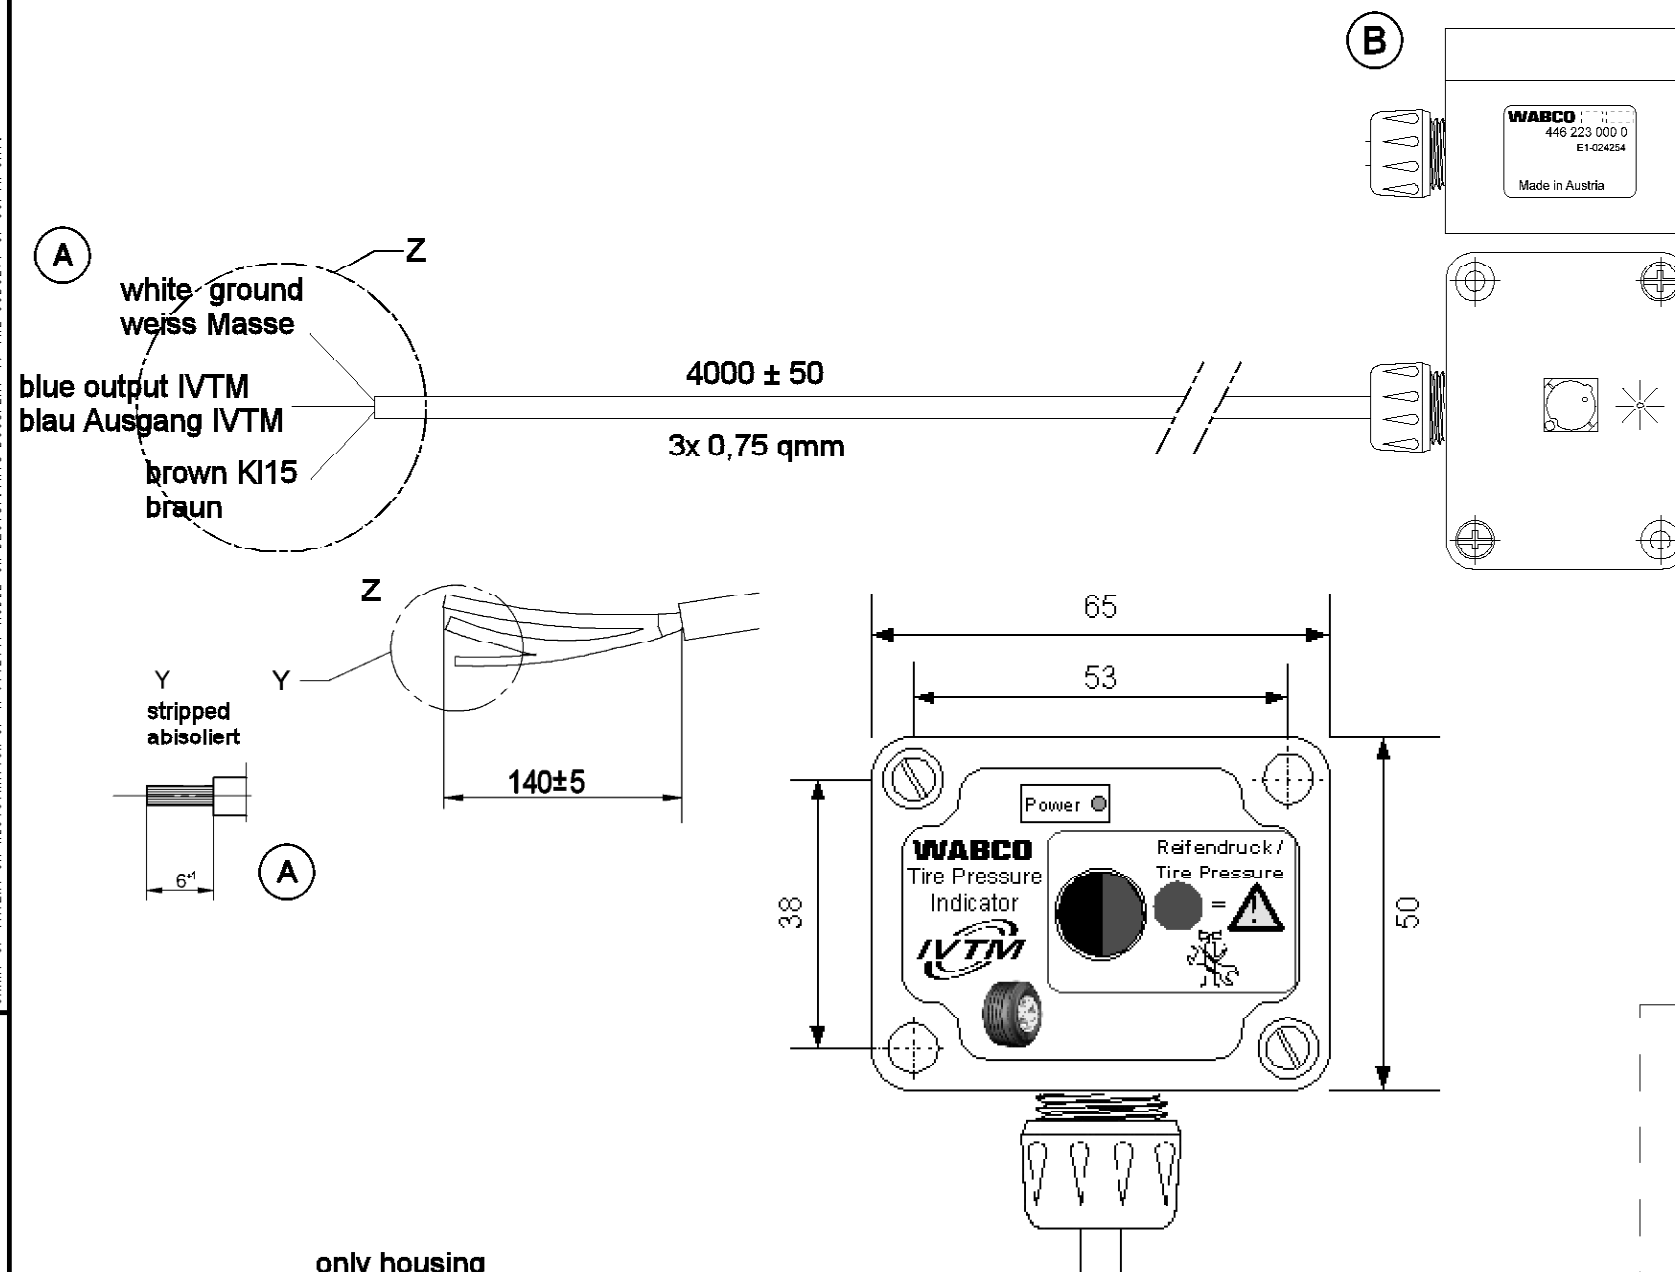


[illegible]

VOLTAGE
SPANNUNG
VOLTAGE
VOLTAGGIO

19V ... 30V

THERMAL RANGE OF APPLICATION
THERM. ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

-40°C...+65°C


STORING TEMPERATURE
LAGERTEMPERATUR
TEMPERATURE D'UTILISATION
TEMPERATURA DI ESERCIZIO


-40°C...+80°C

**PROTECTION TYPE
SCHUTZART
MODE DE PROTECTION
MODO DI PROTEZIONE**

IP66

**FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR OUTRES CARACTERSTIQUES "VOIR" PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VERDERE SPECIFICA DI PRODOTTO DOCUMENTO**

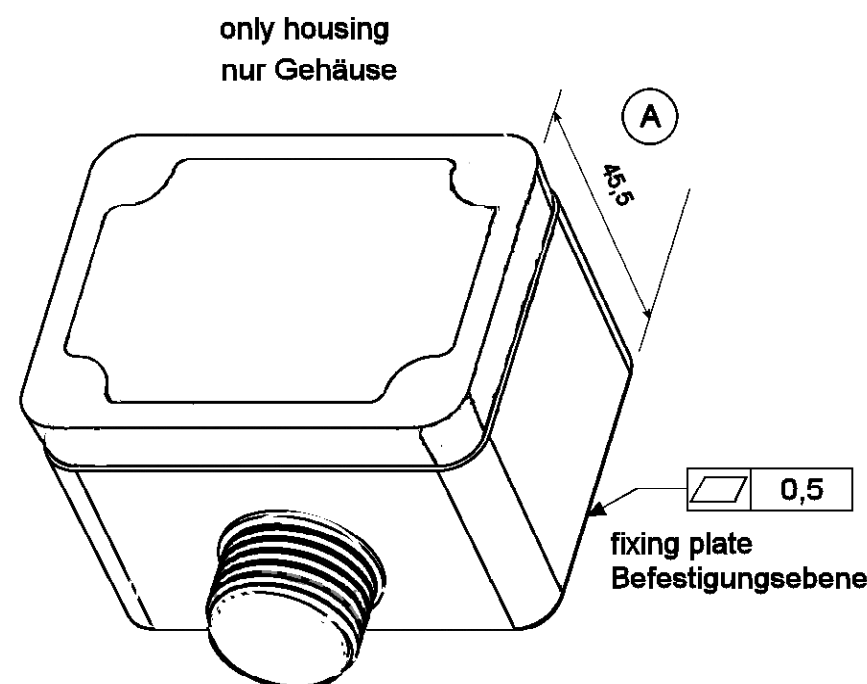

GENERAL SPECIFICATION:			JED-334-0						Pre/ENGINEER DRAWING COPYRIGHT			WABCO Tire Pressure Indicator Reifendruckwarnanzeige										
FURTHER TECHNICAL DATA:									DATE		SIGNATURE											
DOC. CODE:			SHEET:			TO			DRAWN													
GENERAL TOLERANCES									2004-10-05		PFENNIG											
RANGE OF NOMINAL DIMENSIONS (± mm)									CHECKED													
CLASS		1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400				2004-10-05		MEIER										
FINE			0.5	1.0	1.5	2.0	±3°				EXPERT CODE		772									
MEDIUM		✗	1.0	2.0	3.0	4.0					2004-10-05		HEIDER									
COARSE			2.0	3.5	5.0	6.5					MASS		SCALE									
TAPPED HOLES ACC. ISO 4039 / JED-152						93493	1xB	05-02-16	0.4 kg				PRODUCT IDENTIFICATION NO. 446 223 000 0		DOC. CODE		SHEET					
1) TOLERANCE CLASS APPLIED CROSSMARKED						93485	3xA	05-02-09	SIZE						TRI		605		1/1			
						DCN-NO.	REV.	DATE	A 3		620				FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR	
															02		✗					

Drw.: DRW00002

Vol.: BOND1 a.1