

VOLTAGE
SPANNUNG 0 ... 24V +20%
VOLTAGE
VOLTAGGIO

STORAGE TEMPERATURE FROM
LAGERTEMPORATUR VON
TEMPERATURE DE MAGASINAGE DE -20 +60°C
TEMPERATURA DELL'IMMAGAZZINAMENTO DA



THERMAL RANGE OF APPLICATION
THERM. ANWENDUNGSBEREICH 0 +60°C
PLAGE DE TEMPERATURE EN UTILISATION
CAMPO TERMICO DI APPLICAZIONE

PROTECTION TYPE
SCHUTZART
MODE DE PROTECTION
MODO DI PROTEZIONE

IP20(DIN 40050)

SURFACE GRAINED ACCORDING TO JED-533.063
OBERFLÄCHE GENARBT GEMAESS JED-533.063
SURFACE GRAINEE SELON JED-533.063
SUPERFICIE GRANITA SECONDO JED-533.063

COLOUR : BLACK
FARBE : SCHWARZ RAL 9011
COLOR : NOIR
COLORE : NERO

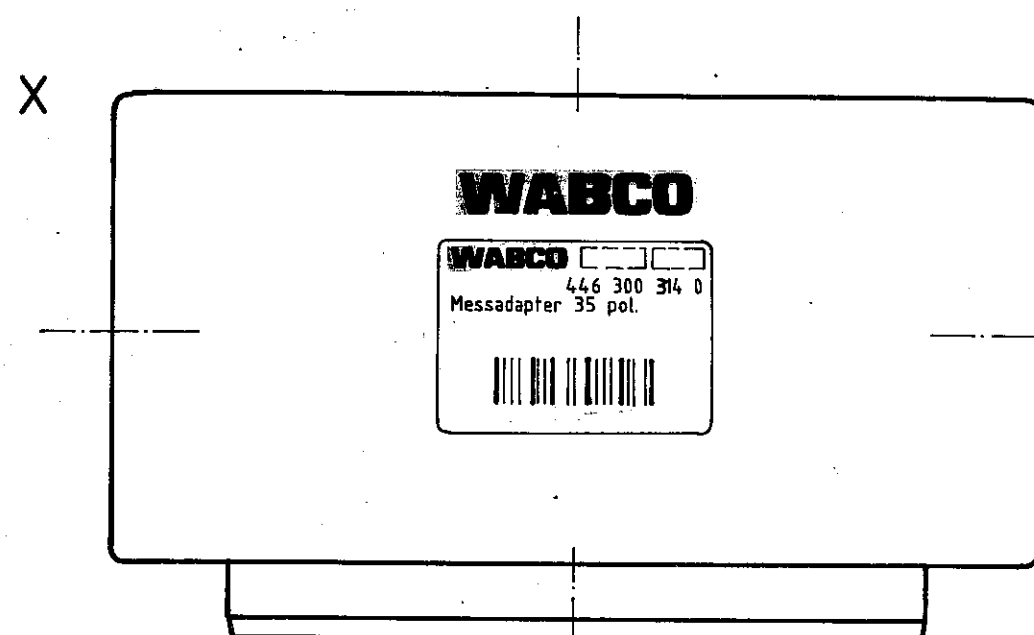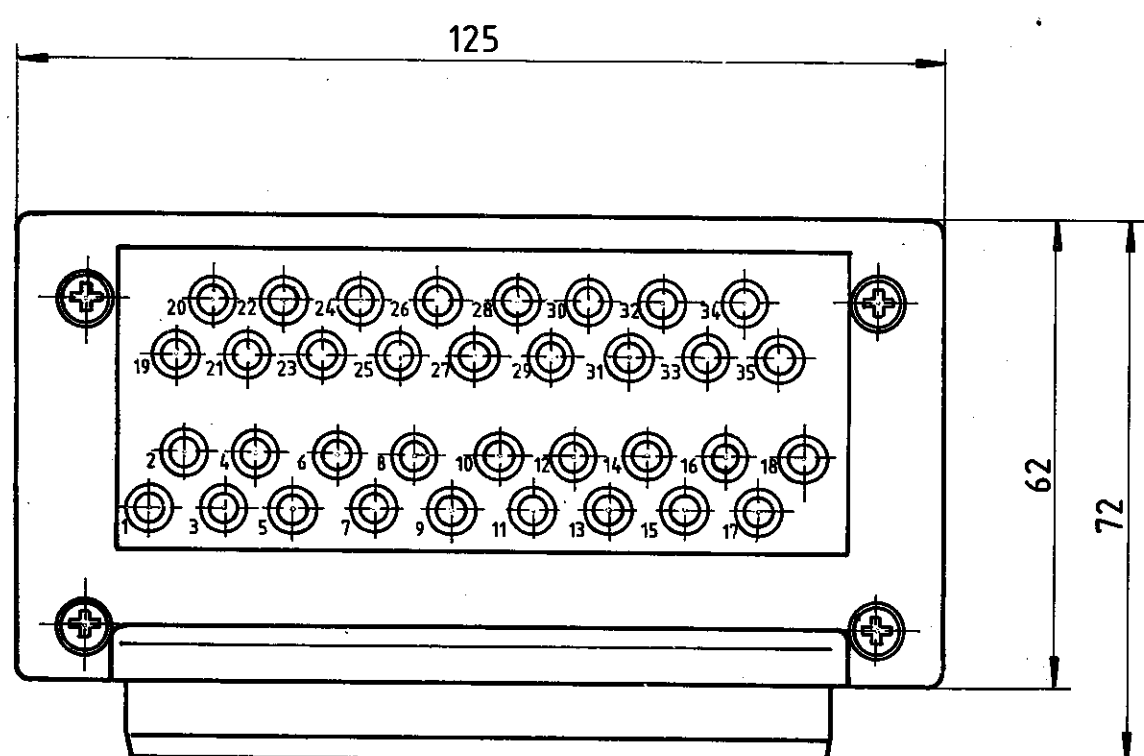

FURTHER TECHNICAL DATA SEE							L		COPYRIGHT BY WABCO		WABCO		
IDENTIFICATION No.:							K		DATE	SIGNATURE			
CODE FOR DOCUMENT: 605					SHEET:			J	91.01.16	<i>[Signature]</i>	MEASURING ADAPTER 35 PINS		
GENERAL TOLERANCES							H		91.01.16	<i>[Signature]</i>	MESSADAPTER 35 POL.		
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)				★		G		CHECKED		(A)	ADAPTER DE MEASUR 35 POL.	
	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400		> 400		F		STANDARDIZATION			
I	*	0,5	1	1,5	2	± 3°	E		91-04-30	<i>[Signature]</i>	ADATTORE DA MESSO 35 POL.		
II		1	2	3	4			D		MASS		PRODUCT IDENTIFICATION NO.	
III		2	3,5	5	6,5			C		0,116 kg	SCALE 1:1	446 300 314 0	
TAPPED HOLES ACC. ISO 4039 / JED-152					48826	A	91-07-15		SIZE	T.R.I.	CODE FOR DOCUMENT 605		
1) TOLERANCE CLASS APPLIED CROSSMARKED					OCN.No.	REV.	DATE	A 2	142		CODE F. PROD.GROUP	CODE FOR SHAPE	SHEET 1 / 1
											REPLACEMENT FOR		