



**A** SOCKET  
GERÄTESTECKDOSE  
PRISE DE COURANT  
PRESA DI CORRENTE


**B** SOCKET  
GERÄTESTECKDOSE  
PRISE DE COURANT  
PRESA DI CORRENTE

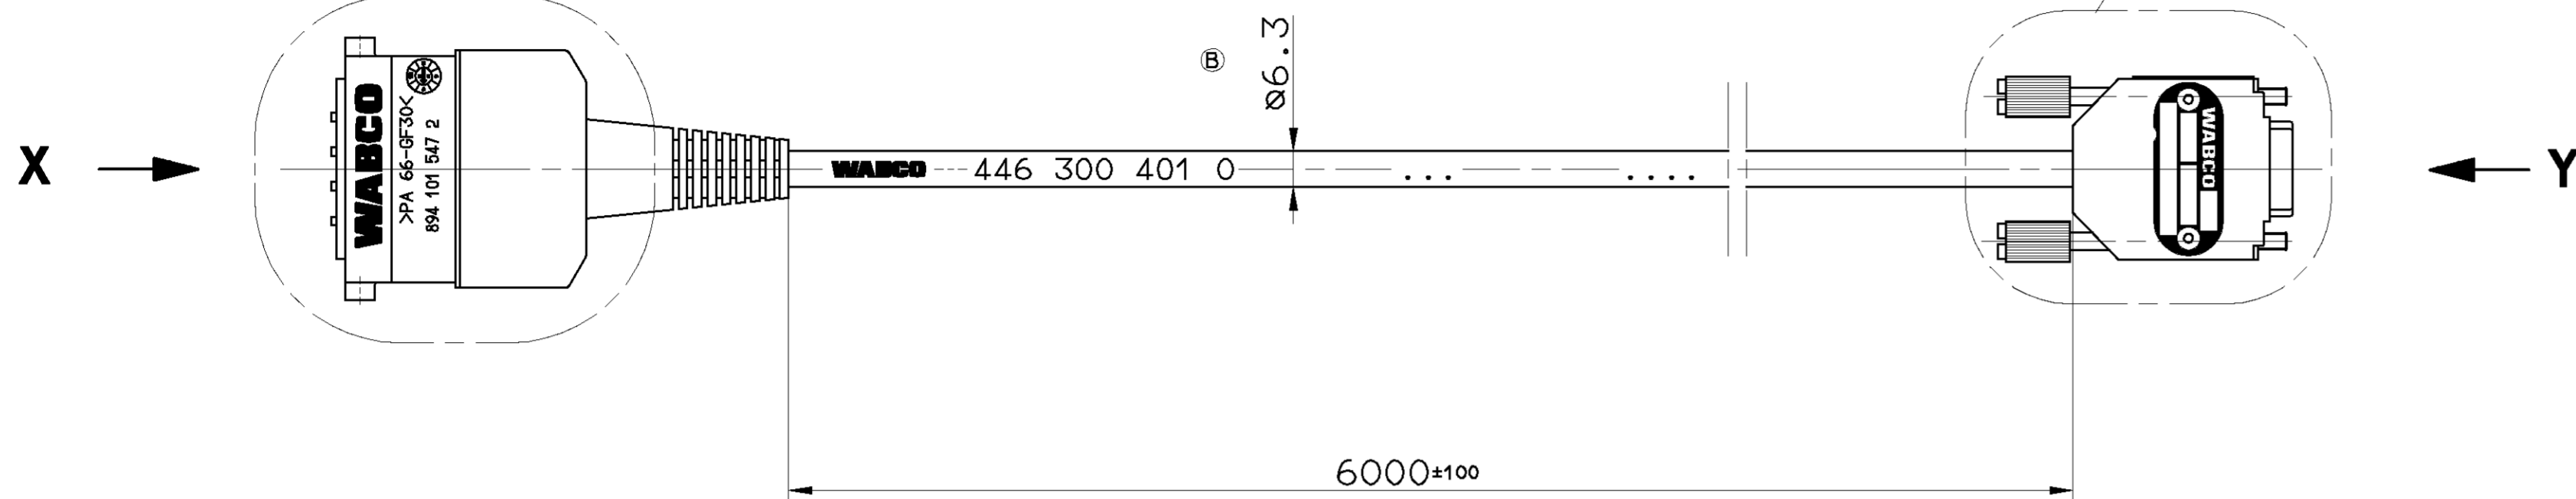

**X 2:1**

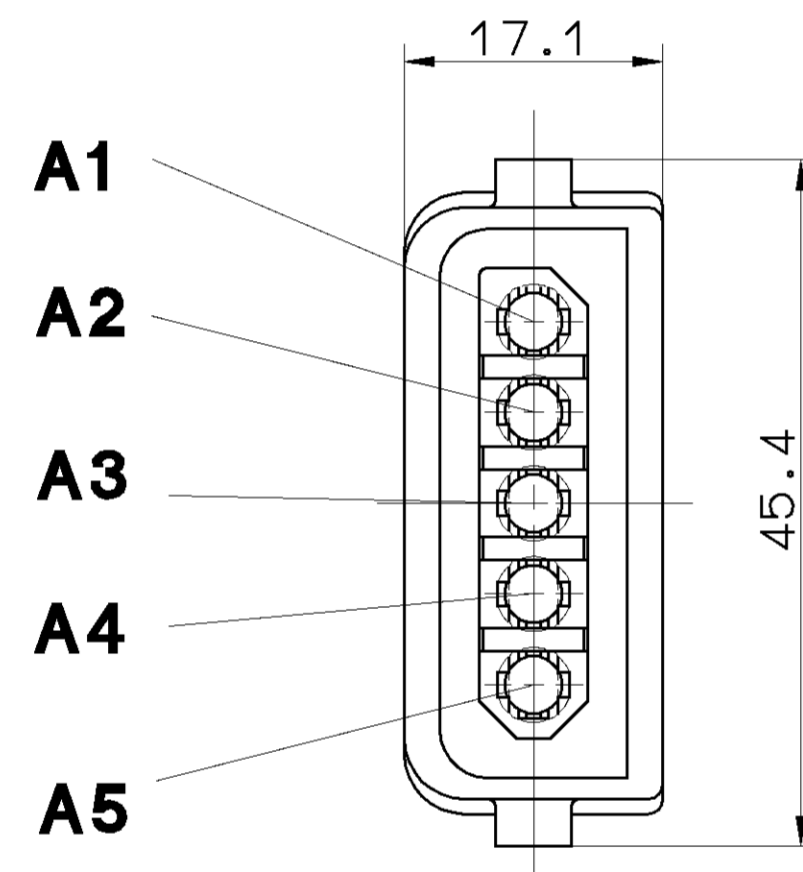

**Y 2:1**

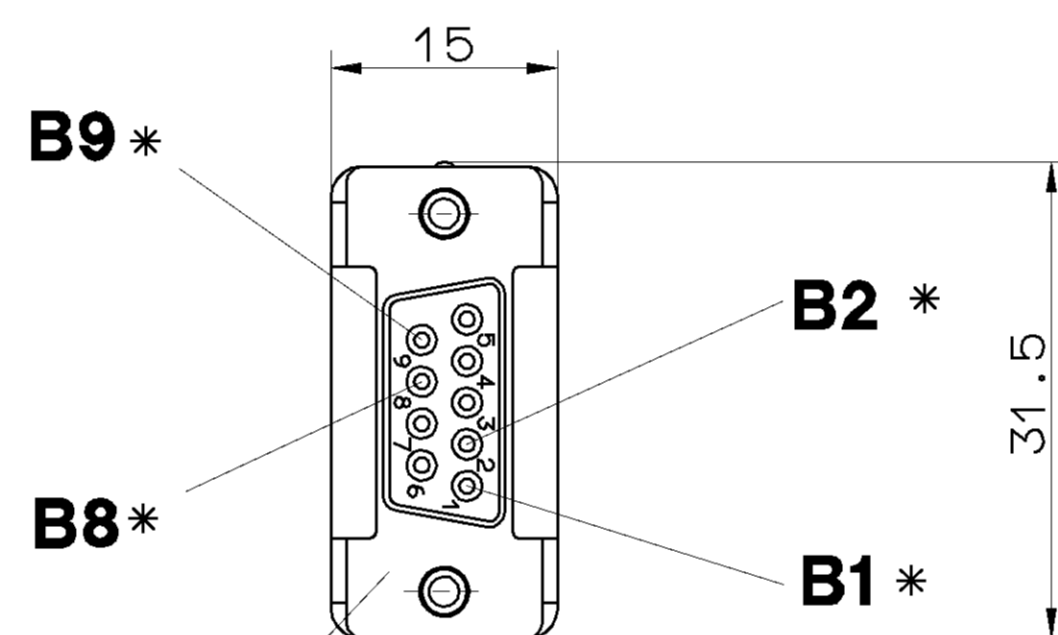

MATING PART  
GEGENSTUECK  
PENDANT  
ACCOPIAMENTO  
DIN 41 652

THERMAL RANGE OF APPLICATION  
THERMISCHER ANWENDUNGSBEREICH  
GAMME D'APPLICATION THERMIQUE  
CAMPO DI APPLICAZIONE TERMICA } -20° C...+60° C

5-CORE CABLE  
LEITUNG 5-ADRIG  
CABLE A 5-CONDUCTEURS  
CAVO A 5-CONDUTTORI } PUR  
4x0,5mm<sup>2</sup> <sup>Ⓟ</sup>

TYPE OF PROTECTION  
SCHUTZART  
MODE DE PROTECTION  
TIPO DI PROTEZIONE } SOCKET  
GERÄTESTECKDOSE : **A** IP 67 , IP 69K  
PRISE DE COURANT : **B** IP 30  
PRESA DI CORRENTE :

RESISTANT TO  
BESTÄNDIG GEGEN  
RESISTANT A  
RESISTENTE A } AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTS PRAY  
LUFT, WASSER, MINERALÖL, BENZIN, DIESELOEL, SALZSPRUEHNEBEL  
AIR, ÉAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN  
ARIA, AQUA, OLIO, MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

SURFACE PROTECTION : gal Sn  
OBERFLÄCHENSCHUTZ :  
PROTECTION DE SURFACE :  
PROTEZIONE SUPERFICI :

CHAMBER IN : KAMMER IN : CHAMBRE EN : CAMERA IN :	WIRE COLOUR ADER FARBE FIL COLOUR FILO COLORE	CROSS SECTION QUERSCHNITT SECTION DE TRANSVERSALE SEZIONE TRASVERSALE	CHAMBER IN : KAMMER IN : CHAMBRE EN : CAMERA IN :
<b>A</b>			<b>B</b>
<b>A1</b>	YELLOW GELB JAUNE GIALLO	0.5 mm <sup>2</sup>	<b>B8</b>
<b>A2</b>	GREEN GRÜN VERT VERDE	0.5 mm <sup>2</sup>	<b>B9</b>
<b>A3</b>	RED ROT ROUGE ROSSO	0.5 mm <sup>2</sup>	<b>B1</b>
<b>A4</b>	BROWN BRAUN BRUN MARRONE	0.5 mm <sup>2</sup>	<b>B2</b>
<b>A5</b>		NOT CONNECTED NIGHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)	<b>B</b>

First production samples, samples from new or modified moulds or changes of every kind must be approved by Engineering Department.  
Teile der ersten Produktion, Teile aus neuen oder geänderten Formenkäusen oder Änderungen jeglicher Art bedürfen der Genehmigung durch die Entwicklungsabteilung.  
Les premières pièces de production, les pièces provenant de nouveaux moules ou de moules modifiés, ou toutes autres modifications, doivent être approuvées par le département des études.  
Campioni di inizio produzione, campioni ottenuti con stampi nuovi o modificati o con qualsiasi genere di modifica devono essere approvati dall'ufficio tecnico.

GENERAL SPECIFICATION: JED-034	DATE: _____	SIGNATURE: _____
FURTHER TECHNICAL DATA:	DRAWN: 94-09-26 WEBER	
DOC. CODE: _____	CHECKED: 94-09-26 SCHM/REIN	
	STANDARDIZATION: 94-09-26 PANTZER	
GENERAL TOLERANCES ( ± mm )	PRODUCT IDENTIFICATION NO.	
CLASS 1) <table border="1"><tr><td><math>\le 50</math></td><td><math>50 > 180</math></td><td><math>180 > 400</math></td><td>>400</td></tr></table>	446 300 401 0	
FINE 0,5 1,0 1,5 2,0	DOC. CODE: 605	
MEDIUM 1,0 2,0 3,0 4,0	SHEET: 1/1	
COARSE 2,0 3,5 5,0 6,5	REPLACEMENT FOR: _____	
TAPPED HOLES ACC. ISO 4039 / JED-162	SHAPE CODE: _____	
1) TOLERANCE CLASS APPLIED CROSSMARKED	REPLACEMENT FOR: _____	