

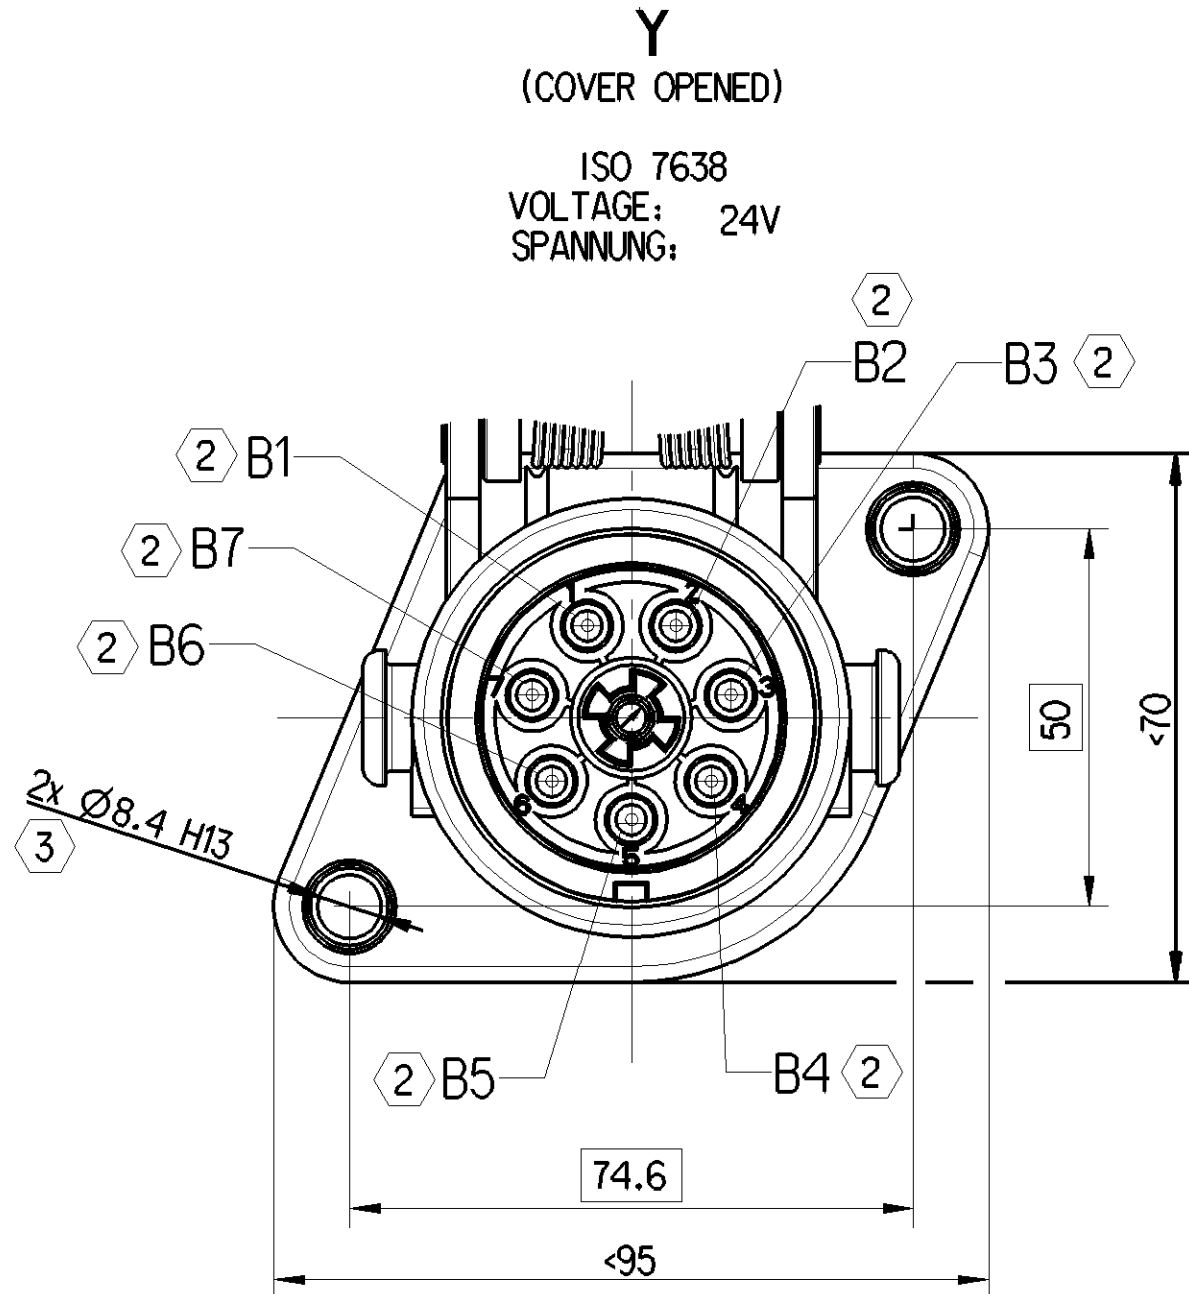
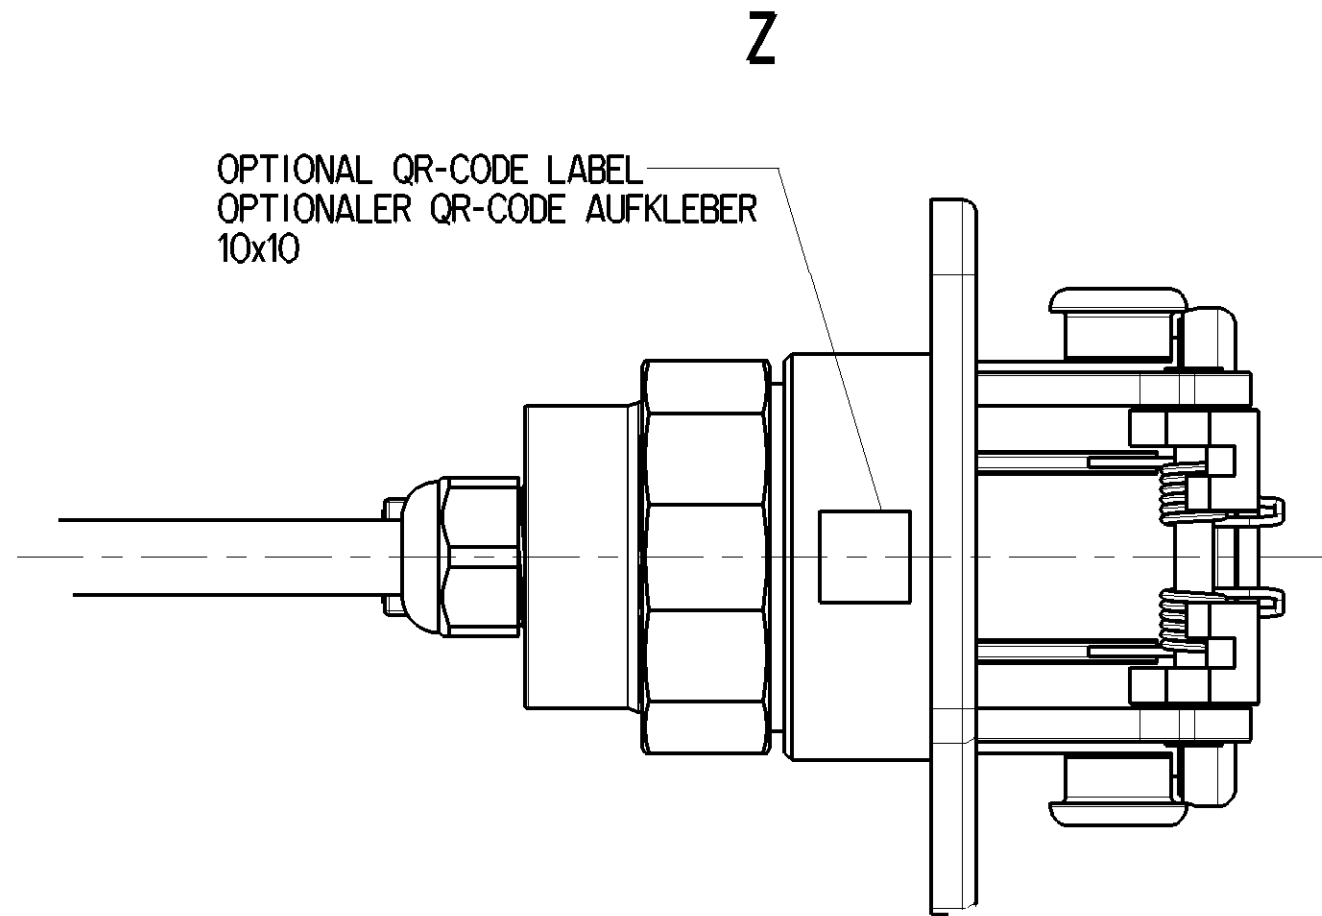


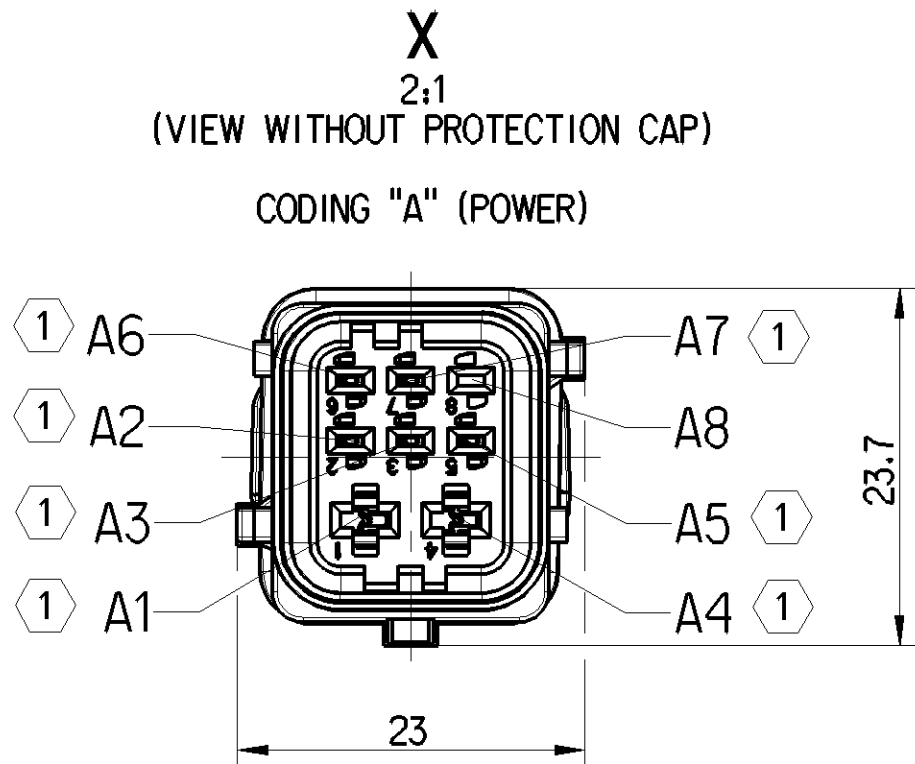

CONNECTOR
GERÄTESTECKDOSE A

CONNECTOR MATING PART:
WABCO EBS TRAILER MODULATOR
STECKVERBINDER GEGENSTUECK:
WABCO EBS-ANHAENGERMODULATOR

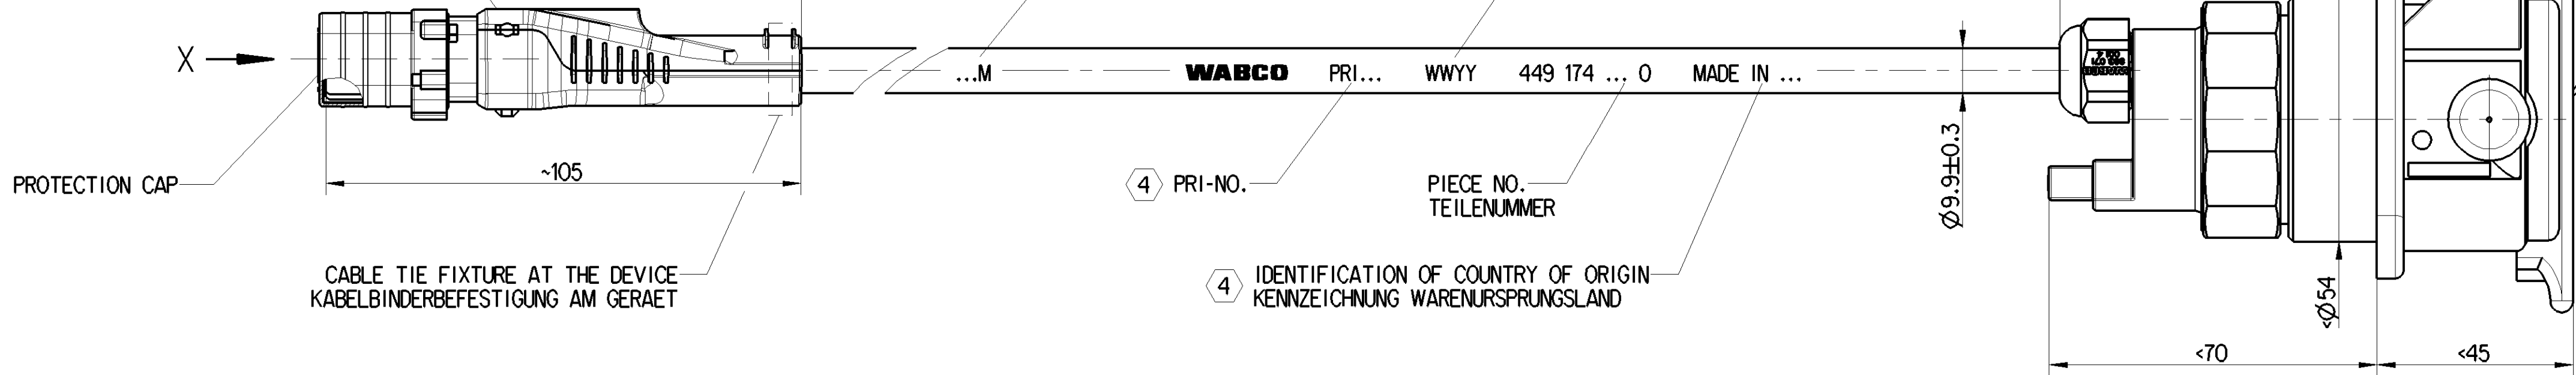

CHAMBER IN: KAMMER IN:	A	CROSS SECTION QUERSCHNITT	CHAMBER IN: KAMMER IN:	B
1		1.5mm ²	1	
2		1.0mm ²	2	
3		1.0mm ²	3	
4		1.5mm ²	4	
5		0.75mm ²	5	
6		0.75mm ²	6	
7		0.75mm ²	7	
8		NOT CONNECTED NICHT BELEGT		

CODE OF LENGTH LAENGENCODIERUNG	
PART NO TEILE NR.	449 174 L[m] □ □ □ 0
EXAMPLE BEISPIEL	L = 12m 449 174 12 0
MIN/MAX LENGTH MIN/MAX LAENGE	L _{min} = 0.2m L _{max} = 18m
TOLERANCES TOLERANZEN	L < 10m ±0.050m L > 10m ±0.075m

④ PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

③ Ø8.4 H13

+0.220

0

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT :
EINBAUINWEISE FUER KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT : 449 000 000 0 / 011

MOUNTED CABLE RESISTANT TO : AIR, WATER, MINERAL OIL, DIESELOIL, SALTSPRAY
MONTIERTES KABEL BESTAENDIG GEGEN: LUFT, WASSER, MINERALOEL, DIESELOEL, SALZSPRUEHNEBEL

7-CORE CABLE: PVC
KABEL 7-ADRIG: 2x1.5mm²+2x1mm²+0.75mm²+(2x0.75mm²)(CAN)


SURFACE PROTECTION : ① Sn ② Ni
OBERFLAECHENSCHUTZ :

FIELD OF APPLICATION : TRAILER
EINSATZBEREICH : ANHAENGER

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH: -40 °C.....+80 °C

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG): A: IP 54 / IP 6K7 / IP 6K6K / IP 6K9K B: IP 54
SCHUTZART (IN VERBINDUNG MIT STECKER): ISO 20653

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

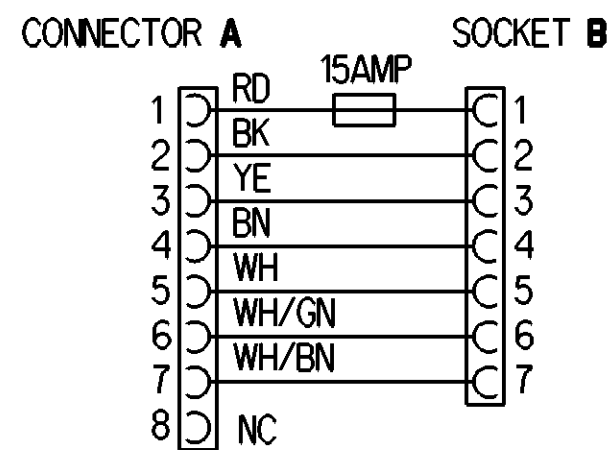

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2022-03-25		Signature: Centkowski	
Doc. Code: Sheet: To:		2022-04-04		Checked: Grychowicz	
General Tolerances JED-261		Range of nominal dimensions in mm		Dimensions in mm	
Class 1) ≤ 50		≤ 180		≤ 400	
Fine ± 0.5		± 1		± 1.5	
Medium ± 1		± 2		± 3	
Coarse ± 2		± 3.5		± 5	
Tapped Holes acc. -				$\pm 3^\circ$	
1) Tolerance Class Applied: Crossmarked					
Mass: / kg		Scale: 1:1		Material No.: 449 174 000 0	
Size: CAD System		Revision: 1x		Date of first issue: 2019-01-23	
A 1 CREO		B 6930_WH		Doc. Code: 053	
				Language: ML	
				Sheet: 1/1	
				Replacement for:	