

Non e' permesso cedere, o terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents hereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modes.

Wskazanie swego wykorzystania tego dokumentu, jego rozpowszechnienie i przekazanie jego zawartosci innym osobom, sa zabronione bez wyrazonego zezwolenia. Wskazanie swego wykorzystania tego dokumentu, jego rozpowszechnienie i przekazanie jego zawartosci innym osobom, sa zabronione bez wyrazonego zezwolenia. Wskazanie swego wykorzystania tego dokumentu, jego rozpowszechnienie i przekazanie jego zawartosci innym osobom, sa zabronione bez wyrazonego zezwolenia.

- 1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 2 WABCO LOGO
- 3 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 4 DATE OF MANUFACTURE
- 5 WABCO IDENTIFICATION NUMBER 449 275 XXX 0
- 6 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

DEGREE OF PROTECTION (IN CONNECTION WITH COUNTERPART CONNECTOR):
CONNECTOR A: IP 6K6K / IP 6K7 / IP 6K9K (ISO 20653)
CONNECTOR B: IP 54
PROTECTION CAP: IP 54

THERMAL RANGE OF APPLICATION: -40°C ... +80°C

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

CONTACTS' SURFACE PROTECTION:
CONNECTOR A: Sn / CONNECTOR B: Sn

CABLE: PVC / 2x4.0mm²+3x1.5mm²+2x1.0mm²


MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED.
SEE DOCUMENT: 449 000 000 0 / 011

FIELD OF APPLICATION : TRAILER

- 8 PROTECTION CAP
- 9 CABLE TIE FIXATION POINT AT THE DEVICE

X
2:1
VIEW WITHOUT PROTECTION CAP
CODING: A

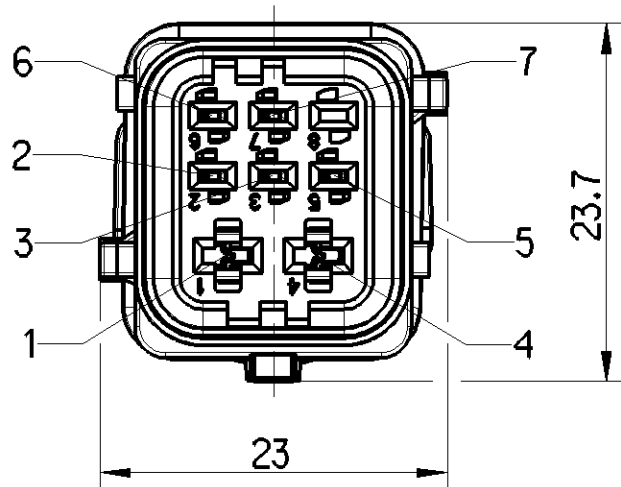


CONNECTOR A

1	RD	4.0mm ²	C	1
2	BK	1.5mm ²	C	2
3	YE	1.5mm ²	C	3
4	BN	4.0mm ²	C	4
5	WH	1.5mm ²	C	5
6	WH/GN	1.0mm ²	C	6
7	WH/BN	1.0mm ²	C	7
8	N.C.		C	7


COLOR CODING
FOR WIRES:
BK - BLACK
BU - BLUE
BN - BROWN
GN - GREEN
RD - RED
WH - WHITE
YE - YELLOW
VT - VIOLET
PK - PINK

CODE OF LENGTH	
PART NO	449 275 □□.□ 0
EXAMPLE	L = 12.5m 449 275 125 0
MIN/MAX LENGTH	L _{min} = 0.2m L _{max} = 18.0m
TOLERANCES	L ≤ 10m ± 0,050m L > 10m ± 0,075m

Y
ISO 7638
VOLTAGE: 24V

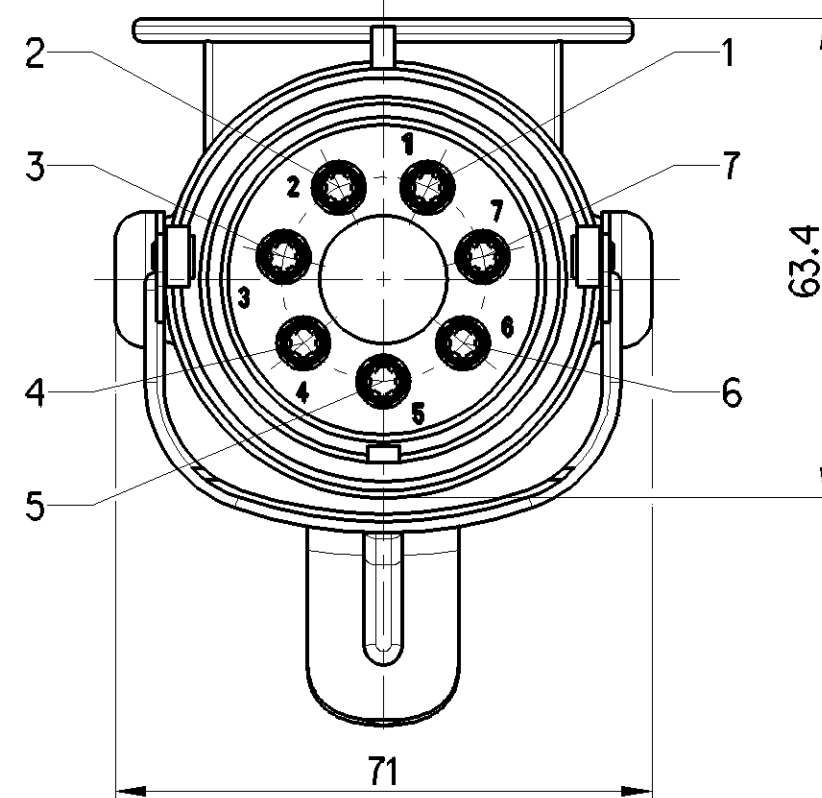

CONNECTOR B

General Specification: JED-334-1, Size ISO 14405 LP						Copyright WABCO®		WABCO SUPPLY CABLE						
Further Technical Data:						Date	Signature							
Doc. Code:		Sheet:		To		Drawn	Osinski							
General Tolerances JED-261						Checked								
Range of Nominal Dimensions (± mm)						2021-07-27	Grychowicz							
Class 1)							Expert							
						Overhage								
Fine		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	Mass	Scale	Material No.		Date of first issue: 2020-01-22			
Medium		X	1.0	2.0	3.0		4.0	/	1:1 2:1	449 275 000 0		Doc.Code	Language	Sheet
Coarse			2.0	3.5	5.0		6.5	Size	CAD System			053	ML	1/1
Tapped Holes acc.						A 2		CREO		ECN-No.	Revision	Techn. Resp.	Replacement for	
1) Tolerance Class Applied Crossmarked										508341	1x	A	6930_WH	