
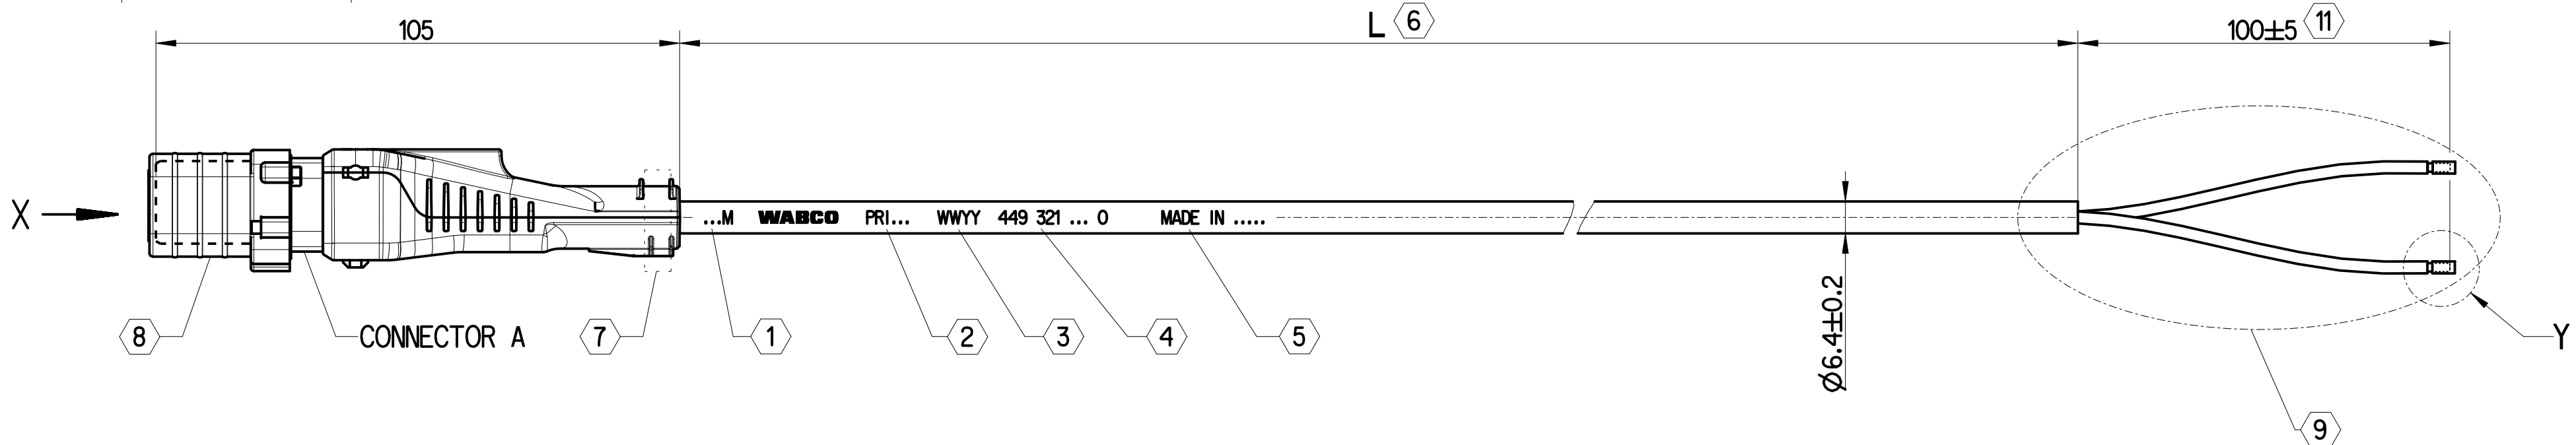


Non e permesso cospirare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Werkzeuge sowie Veranlassung dieser Untertage, Verletzung und Mithaltung Pres. inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.


X
2:1
VIEW WITHOUT PROTECTION CAP

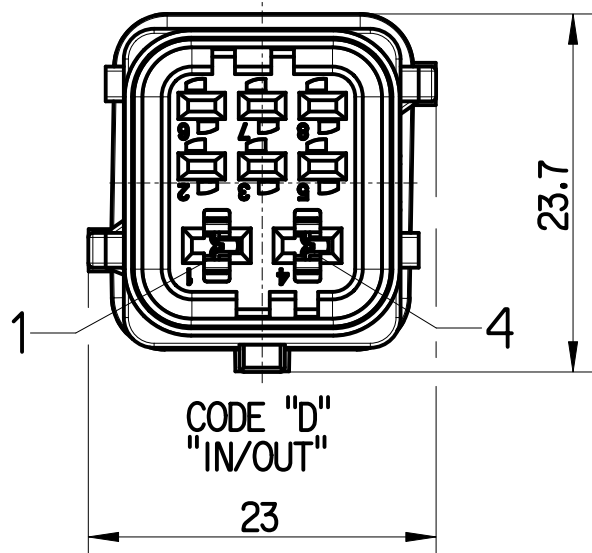

- 1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 2 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 3 DATE OF MANUFACTURE
- 4 WABCO IDENTIFICATION NUMBER 449 321 XXX 0
- 5 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

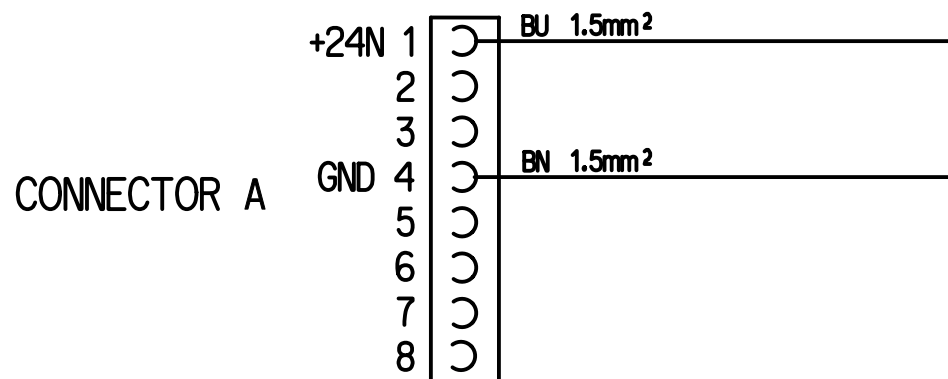

- 6 PROTECTION CAP
- 7 CABLE TIE FIXATION POINT AT THE DEVICE
- 8 CABLE SEAL AGAINST WATER INGRESS IS REQUIRED
- 9 DIMENSION DIVERGENCES AND MISSING INSULATION LEFTOVERS
AS A RESULT OF TRANSPORT AND HANDLING ARE ALLOWED
- 10 DEVELOPMENT LENGTH OF WIRES

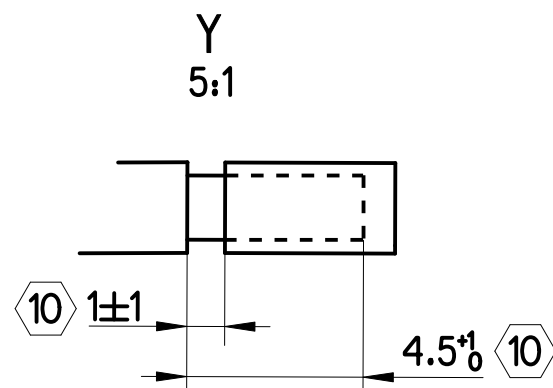

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG):
CONNECTOR A: IP 6K6K / IP 6K7 / IP 6K9K
PROTECTION CAP: IP 54 (ISO 20653)

THERMAL RANGE OF APPLICATION: -40°C ... +80°C

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

CONTACTS' SURFACE PROTECTION;
CONNECTOR A: Sn

CABLE: PUR 2x1.5mm²

MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED.
SEE DOCUMENT: 449 000 000 0 / 011

FIELD OF APPLICATION : TRAILER

COLOUR CODING
FOR WIRES:
BK - BLACK
BU - BLUE
BN - BROWN
GN - GREEN
RD - RED
WH - WHITE
YE - YELLOW
VT - VIOLET
PK - PINK

6 CODE OF LENGTH	
PART NO	449 321 □□,□ 0
EXAMPLE	L = 4m 449 321 040 0
MIN/MAX LENGTH	L _{min} = 0.2m L _{max} = 12m
TOLERANCES	L ≤ 10m ± 0,050m L > 10m ± 0,075m

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP					
Further Technical Data:					
Doc. Code:			Sheet:		To
General Tolerances JED-261					
		Range of nominal dimensions in mm			
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine	±0.5	±1	±1.5	±2	±3
Medium	±1	±2	±3	±4	
Coarse	±2	±3.5	±5	±6.5	
Tapped Holes acc.					
1) Tolerance Class Applied Crossmarked					

Copyright ZF®	
Date	Signature
Drawn	2024-01-17
Checked	Bigotti
Size	2024-01-17
CAD System	Rakucki
Dimensions in mm	
Mass	Scale
/ kg	1:1
Size	2:1 5:1
A 2	CREO

		IN/OUT CABLE	
Material No.		Date of first issue: 2019-11-09	
449 321 000 0		Doc.Code Language Sheet	
053 EN 1/1		Revision Techn. Resp. Replacement for	
1 x B		6930_WH	
ECN-No. 516221		100mm	