

Non è permesso copiare o riprodurre questo documento, né utilizzare il contenuto o i dati contenuti in esso, senza permesso scritto dalla WABCO.


Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite de la WABCO.

Alle Rechte sind vorbehalten. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO.

All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of WABCO.

CHAMBER IN: KAMMER IN: CHAMBRE EN: CAMERA IN:	CABLE KABEL CAVO	WIRE COLOUR ADER FARBE FIL COLEURE FILO COLORE	CHAMBER IN: KAMMER IN: CHAMBRE EN: CAMERA IN:
7	4.0mm <sup>2</sup>	RED ROT ROUGE ROSSO	1
6	1.5mm <sup>2</sup>	BLACK SCHWARZ NOIR NERO	2
4	1.5mm <sup>2</sup>	YELLOW GELB JAUNE GIALTO	3
5	4.0mm <sup>2</sup>	BROWN BRAUN BRUN BRUNO	4
3	1.5mm <sup>2</sup>	WHITE WEISS BLANC BLANCO	5
2	1.0mm <sup>2</sup>	WHITE/GREEN WEISS7GRUEN BLANC/VERT BLANCO/VERDE	6
1	1.0mm <sup>2</sup>	WHITE/BROWN WEISS7BRAUN BLANC/BRUN BLANCO/BRUNO	7
NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)			8

CODE OF LENGTH LAENGCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	PART NO. TEILE NR. NO. DE PIECE CODICE	L[m]
449 347 □ □ □ 0		
EXAMPLE BEISPIEL EXEMPLE ESEMPIO		L = 0.3m 449 347 003 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA		L <sub>min</sub> = 0.2m L <sub>max</sub> = 18m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA		L ≤ 10m ±0.050m L > 10m ±0.075m

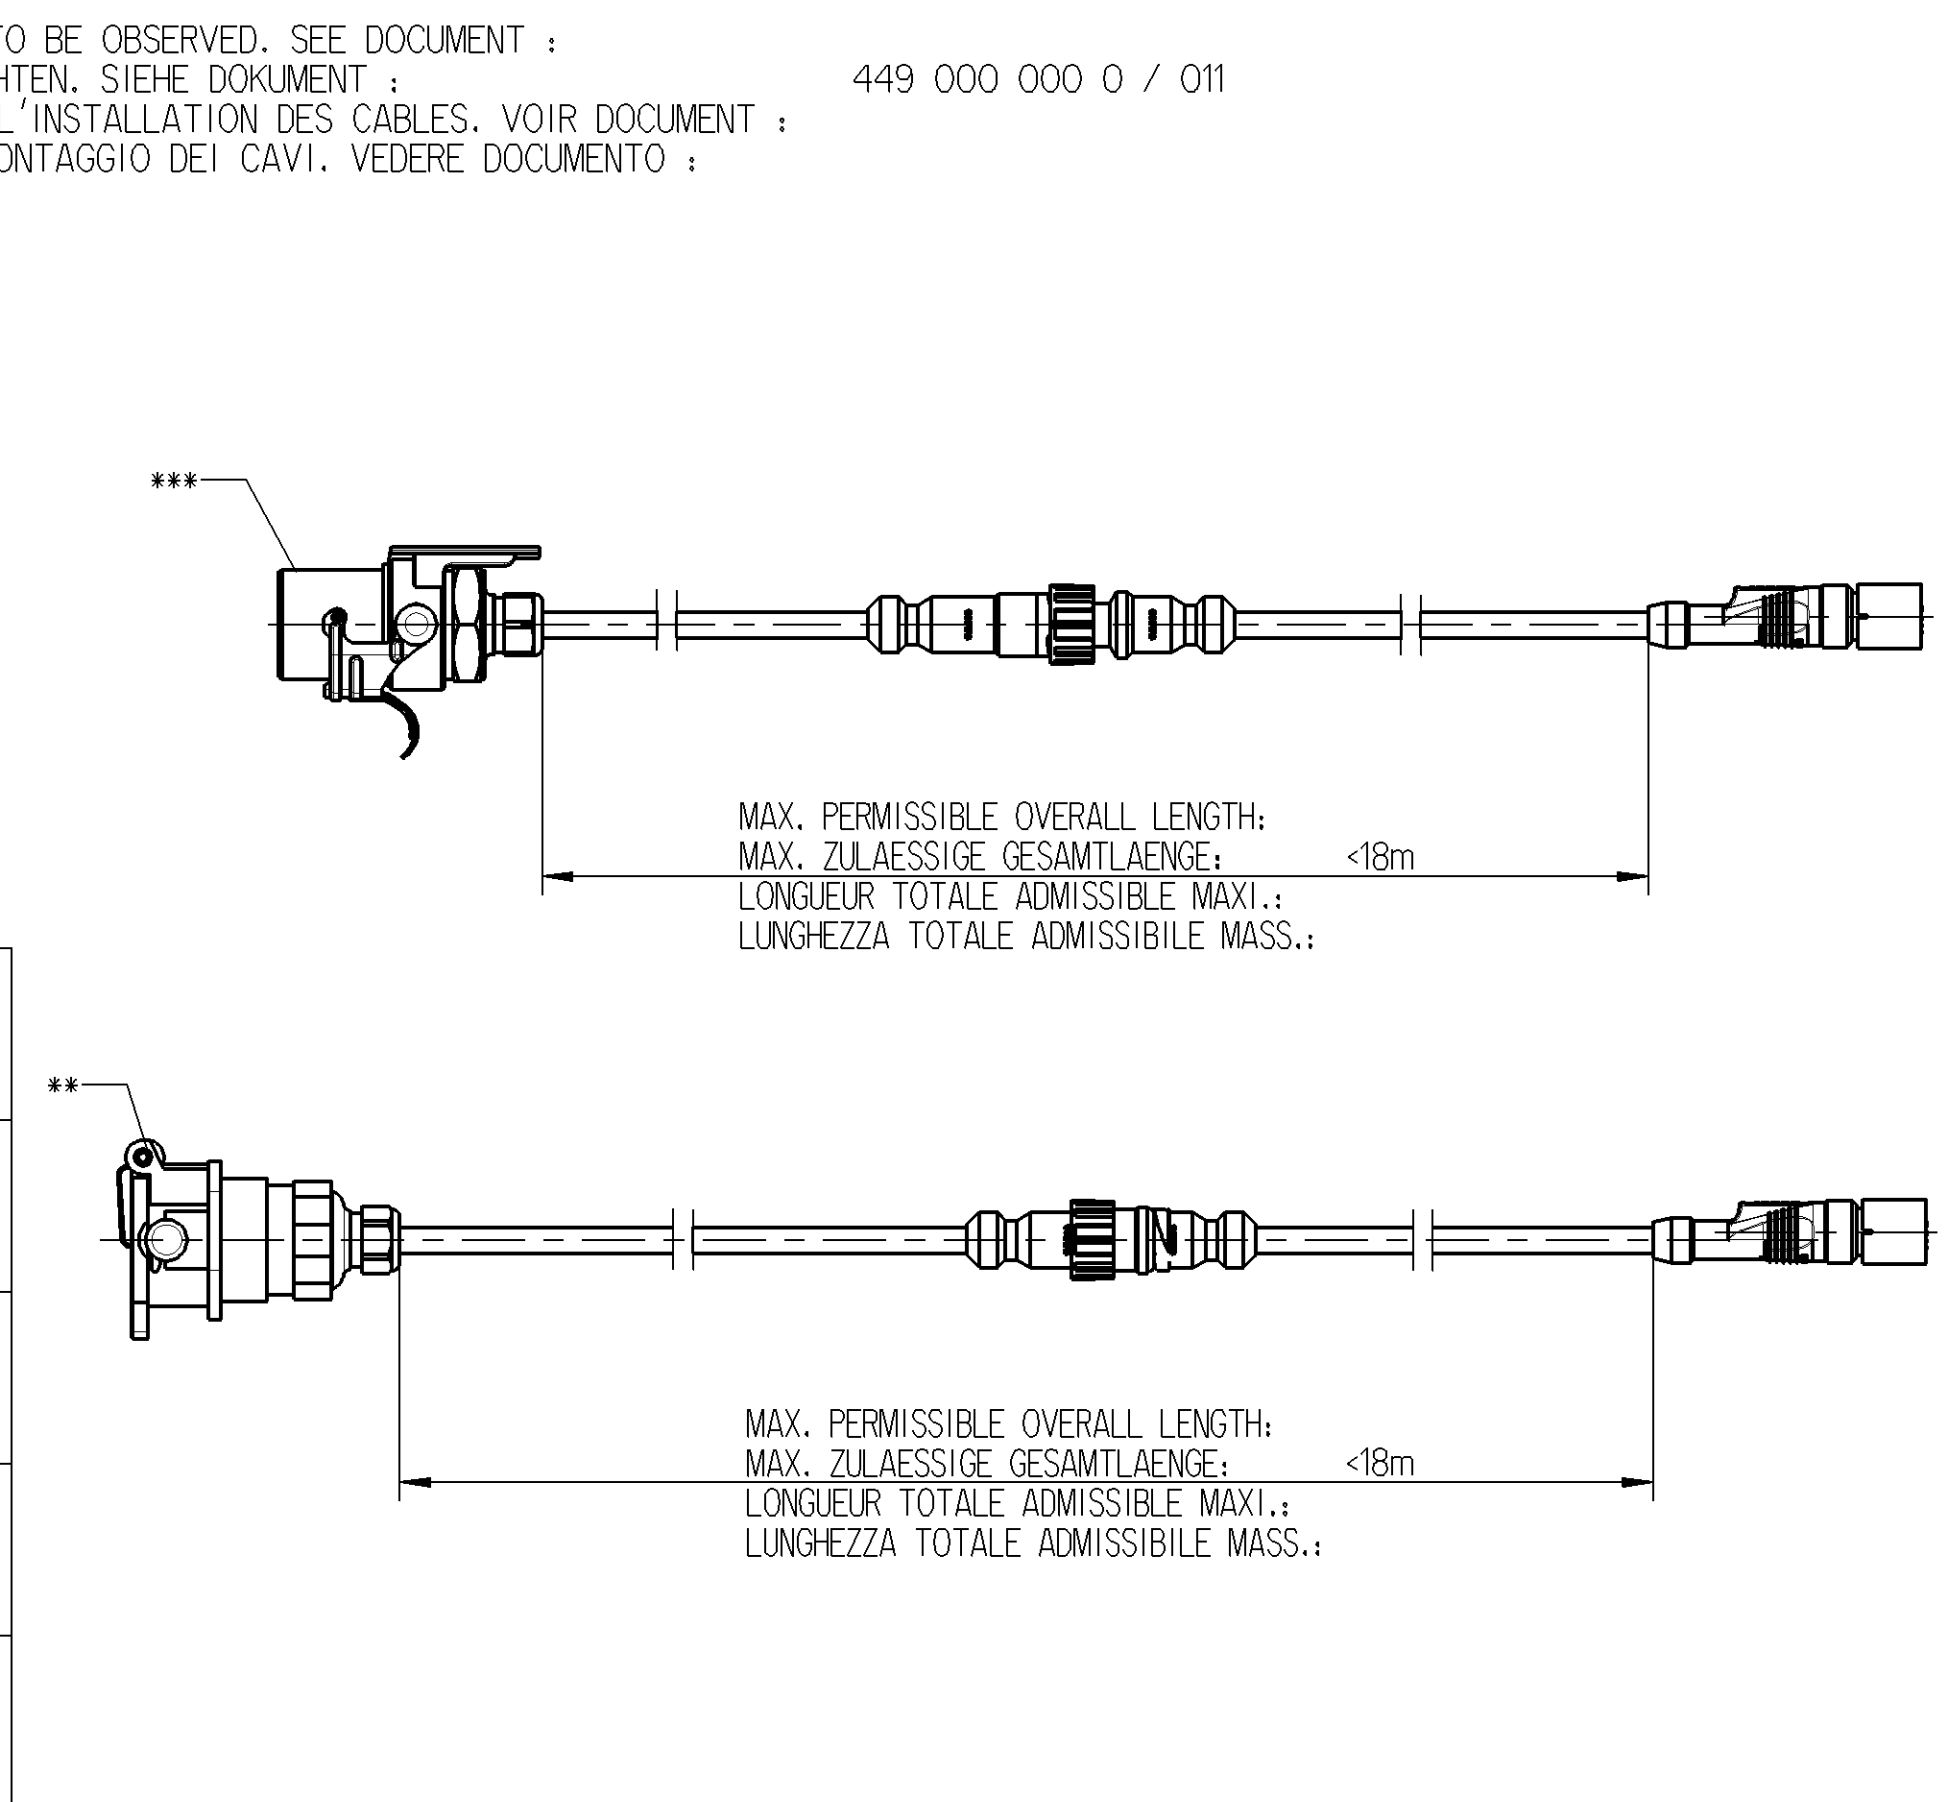

**THERMAL RANGE OF APPLICATION :**  
 THERMISCHER ANWENDUNGSBEREICH: -40 °C...+80 °C  
 GAMME D'APPLICATION THERMIQUE:  
 CAMPO TERMICO D'APPLICAZIONE:

**MOUNTED CABLE RESISTANT TO :** AIR, WATER, MINERAL OIL, DIESEL OIL, SALTS PRAY  
 MONTIERTES KABEL BESTAENDIG GEGEN: LUFT, WASSER, MINERAL OEL, DIESEL OEL, SALZSPRUEHNEBEL  
 CABLE MONTÉ RESISTANT A : AIR, EAU, HUILE MINERALE, GASOIL, BROUILLARD SALIN  
 CAVO MONTATO RESISTENTE A : ARIA, ACQUA, OLIO MINERALE, GASOLIO, NEBBIA SALINA

**DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) :** A : IP 6K 7 / IP 6K 9K  
 SCHUTZART (IN VERBINDUNG MIT STECKER) : B : IP 6K 6K / IP 6K 9K  
 DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) : C : IP 54  
 GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) : ISO 20653 (en)

**CABLE SHEATH:**  
 KABELMANTEL: PVC Ⓐ  
 GAINE DU CÂBLE: 3x1.5mm<sup>2</sup> + 2x4mm<sup>2</sup> + 2x1mm<sup>2</sup>  
 GUAINA CAVO:

**SURFACE PROTECTION :**  
 OBERFLAECHENSCHUTZ : \* Sn  
 PROTECTION DE SURFACE:  
 PROTEZIONE SUPERFICI :

**FIELD OF APPLICATION :** TRAILER  
 EINSATZBEREICH : ANHAENGER  
 DOMAINE D'APPLICATION: REMORQUE  
 CAMPO DI APPLICAZIONE: RIMORCHIO

General Specifications: JED-334-0		Copyright WABCO®	
Further Technical Data:		Date:	Signature:
Doc. Code:	Sheet: To:	2010-04-27	Hornischmacher
General Tolerances JED-261		Checked:	Gruenderker
Range of Nominal Dimensions ( ± mm)		Expert:	Drosner
Class	1)	≤ 50	> 50 > 180 > 400
Fine		0.5	1.0 1.5 2.0
Medium	X	1.0	2.0 3.0 4.0
Coarse		2.0	3.5 5.0 6.5
Tapped Holes acc.		Material No.:	Date of first issue: 2006-12-13
1) Tolerance Class Applied Crossmarked		449 347 000 0	Doc. Code: 053
		ECN No.:	Language: ML
		Revision: 1x	Sheet: 1/1
		Techn. Resp.:	Replacement for:
		6930_EM	884 057 819 0