
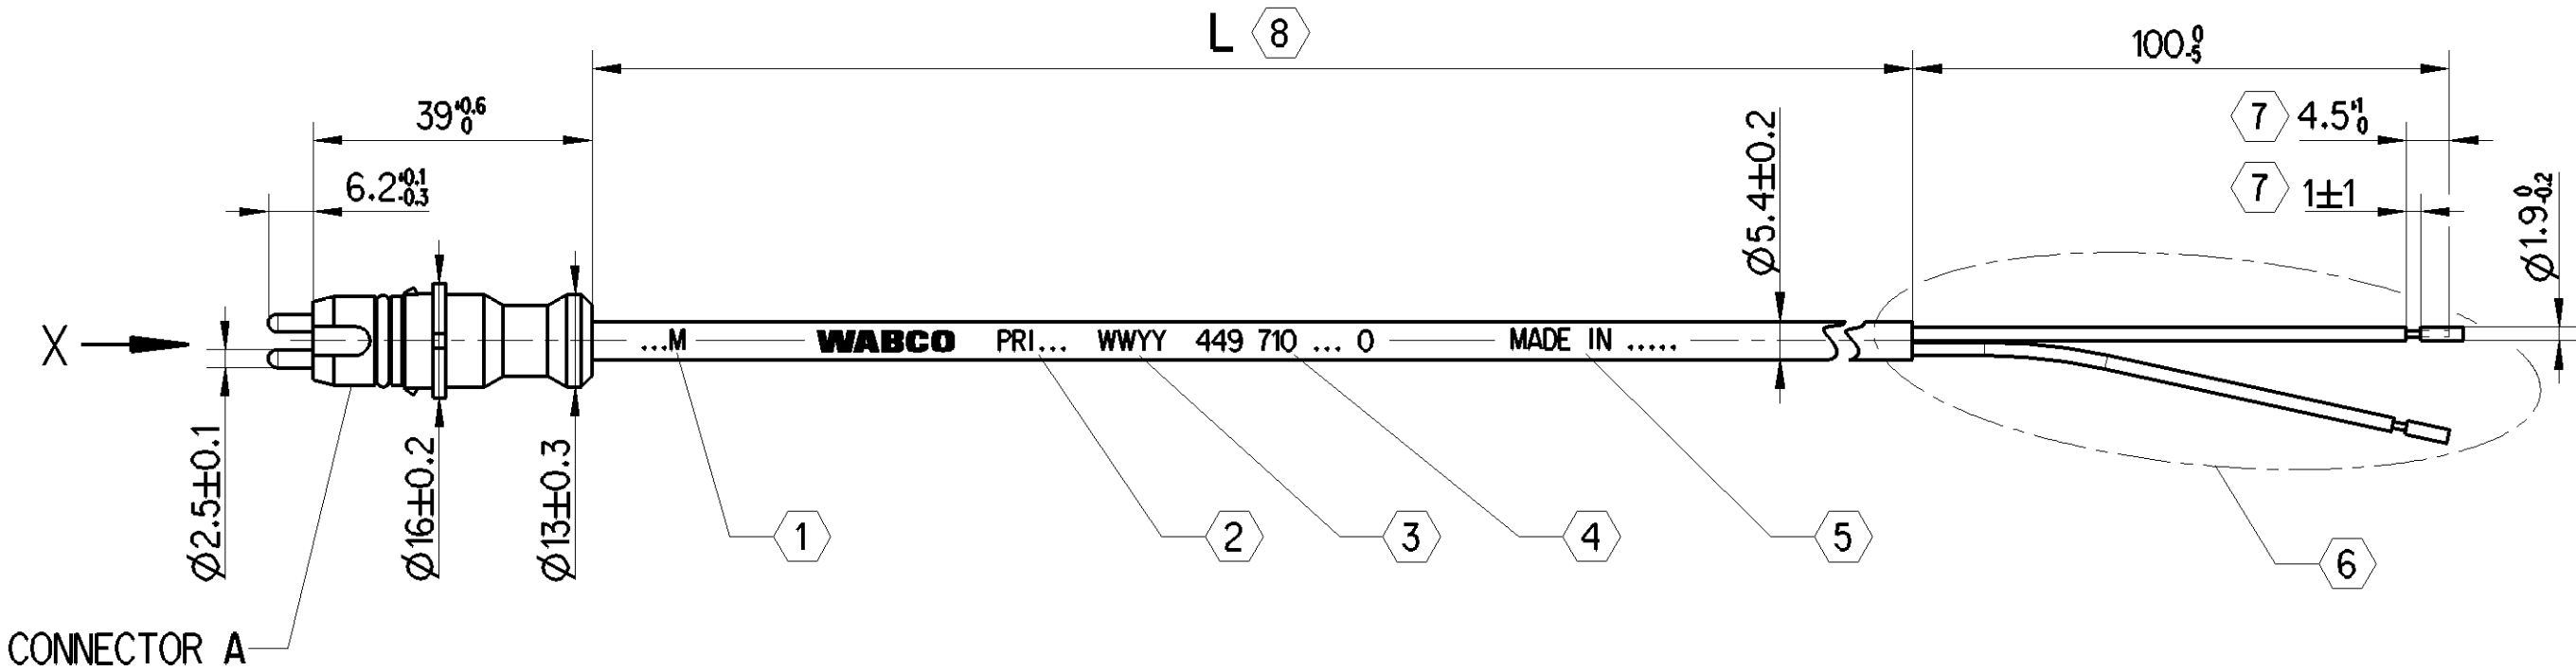


Tout le contenu de ce document, y compris les informations de communication de son contenu, sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso consegnare o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comporta il risarcimento dei danni subiti. È fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Wszystkie prawa zastrzeżone. Wszelkie informacje zawarte w tym dokumencie, w tym jego treść, nie mogą być powielane, rozpowszechniane lub wykorzystywane w inny sposób bez zgody WABCO. Wszelkie prawa zastrzeżone. Wszelkie informacje zawarte w tym dokumencie, w tym jego treść, nie mogą być powielane, rozpowszechniane lub wykorzystywane w inny sposób bez zgody WABCO.

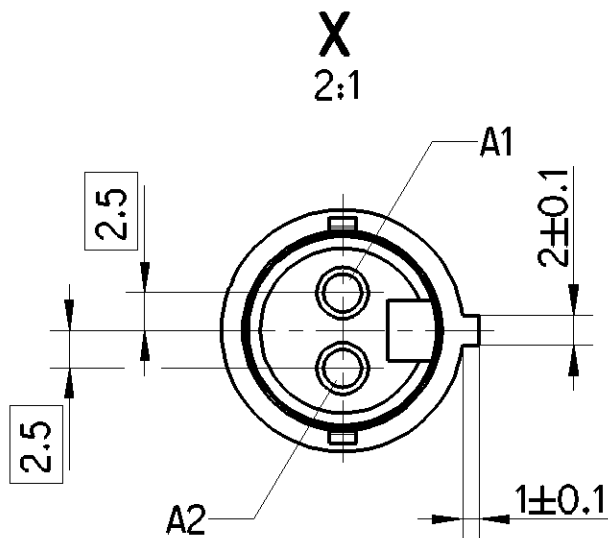

1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

2 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

3 DATE OF MANUFACTURE

4 WABCO IDENTIFICATION NUMBER 449 710 XXX 0

5 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

6 CABLE SEAL AGAINST INGRESS WATER REQUIRED

7 DIMENSION DIVERGENCES AND MISSING INSULATION LEFTOVERS
AS A RESULT OF TRANSPORT AND HANDLING ARE ALLOWED

DEGREE OF PROTECTION (IN CONNECTION WITH COUNTERPART CONNECTOR):
CONNECTOR A: IP 6K6K / IP 6K8 / IP 6K9K (ISO 20653)

THERMAL RANGE OF APPLICATION: -40°C ... +80°C

CONTACTS' SURFACE PROTECTION;
CONNECTOR A: Ag


MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED.
SEE DOCUMENT: 449 000 000 0 / 011

FIELD OF APPLICATION : TRAILER

CABLE: PUR FR / 2x0,75mm²

CABLE COMPLY WITH UN/ECE R118



9 DIN 16901-130

COLOUR CODING
FOR WIRES:
BK - BLACK
BU - BLUE
BN - BROWN
GN - GREEN
RD - RED
WH - WHITE
YE - YELLOW
VT - VIOLET
PK - PINK

8 CODE OF LENGTH	
PART NO	449 710 □□.□ 0
EXAMPLE	L = 12.5m 449 710 125 0
MIN/MAX LENGTH	L _{min} = 0,1m L _{max} = 20.0m
TOLERANCES	L ≤ 10m ± 0,050m L > 10m ± 0,075m

General Specification: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO CABLE WITH SOCKET		
Further Technical Data:		Date	Signature			
Doc. Code: Sheet: To		2021-04-13	Osinski			
General Tolerances JED-261		2021-04-19	Grychowicz			
9 Range of Nominal Dimensions (± mm)		Expert		Overhage		
Class 1)		Mass	Scale	Material No.		Date of first issue: 2021-04-19
Fine		/	1:1	449 710 000 0		Doc.Code
Medium		KG	2:1			Language
Coarse		Size	CAD System	053		Sheet
Tapped Holes acc.		A 2	CREO	ECN-No.		Techn. Resp.
1) Tolerance Class Applied Crossmarked		-		Revision		Replacement for
		-		6390_WH		