


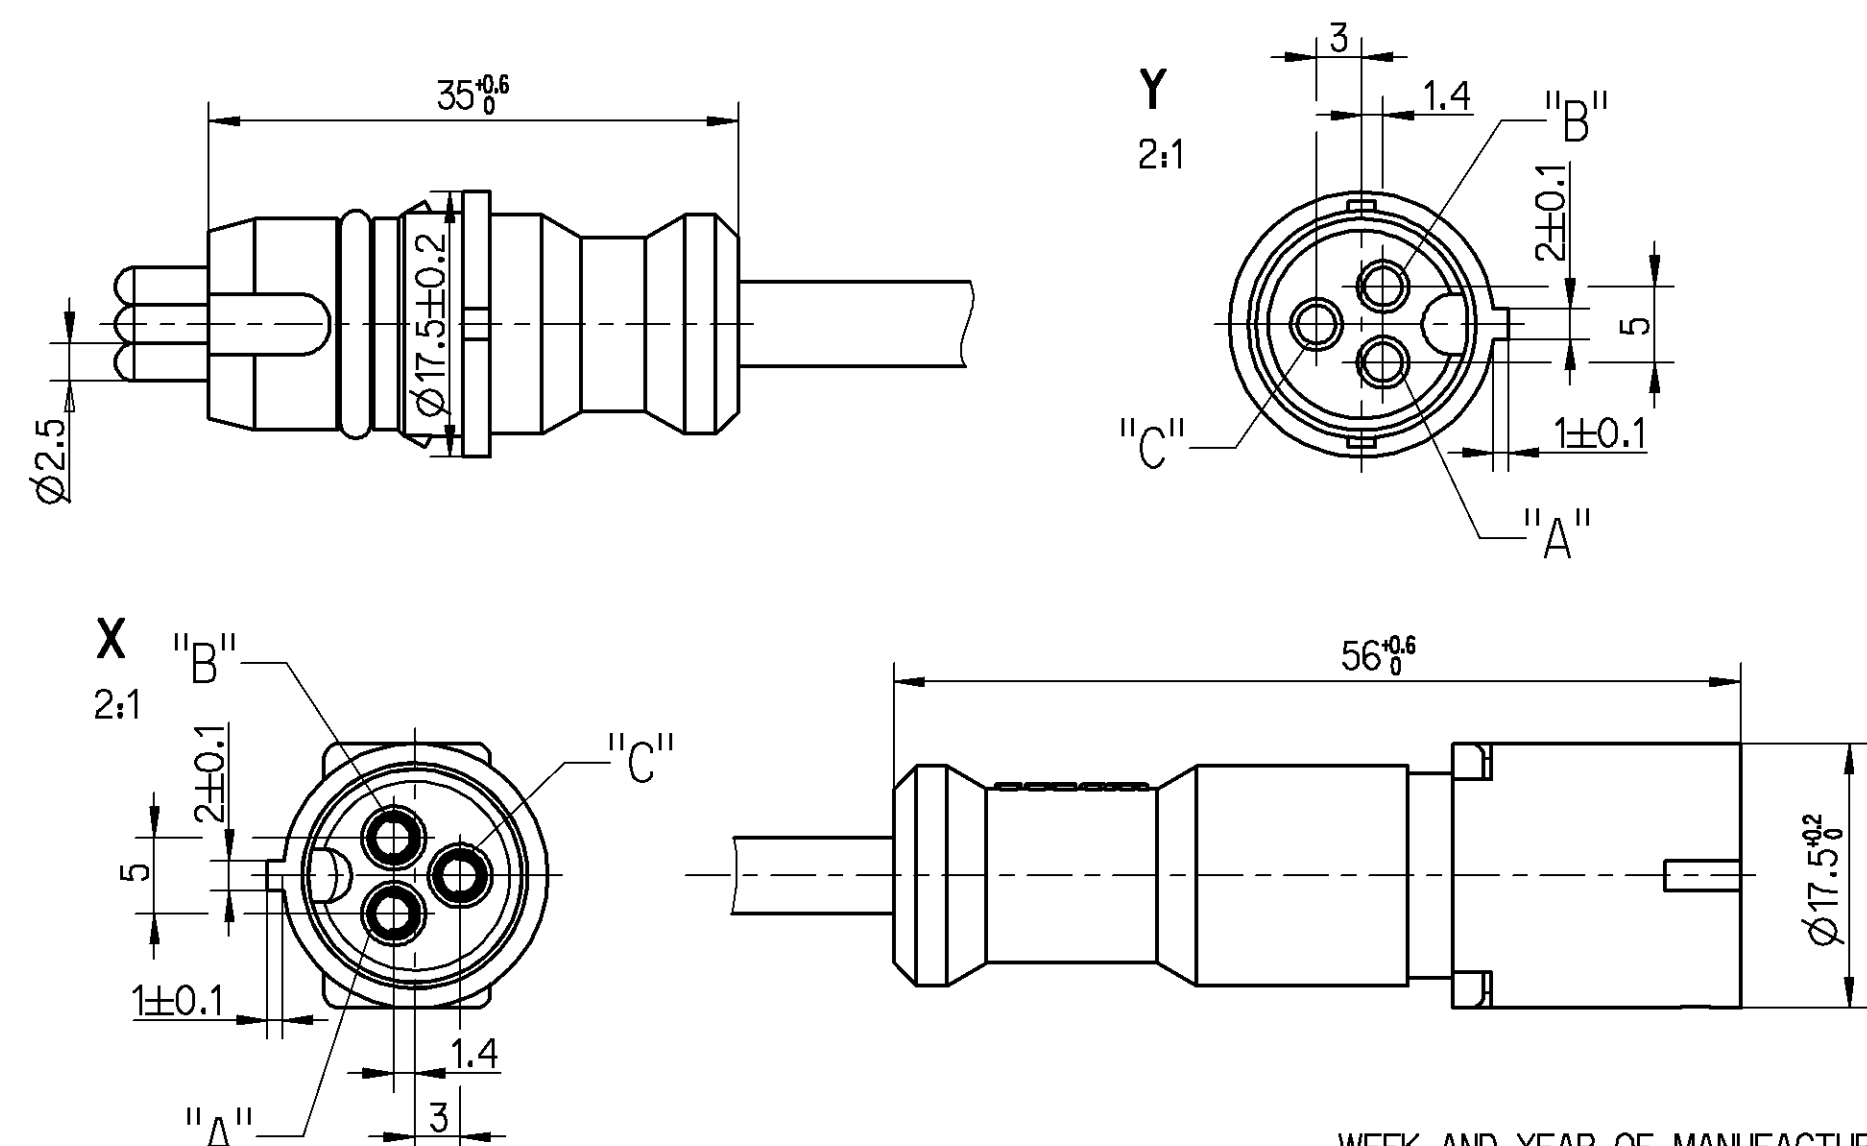

"A"

SIGNAL	(WHITE)
SIGNAL	(WEISS)
SIGNAL	(BLANC)
SEGNALE	(BLANCO)

"B"

POWER SUPPLY	(ROT)
VERSORGUNG	(RED)
ALIMENTATION	(ROUGE)
ALIMENTAZIONE	(ROSSO)


+

"C"

GROUND	(BROWN)
MASSE	(BRAUN)
MASSE	(BRUN)
MASSA	(BRUNO)

-

Thermal range of application Thermischer Anwendungsbereich Gamme d'application thermique Campo termico d'applicazione	}	-40°C...+80°C
Three core cable Leitung dreileitrig Cable a trois conducteurs Cavo a tre conduttori		PUR 3x0.5mm ²
Strain relief cable Zugentlastung kabel Arret de cable Scarico di trazione del cavo		MAX. 50N T ≈ 20°C
Bend radius cable Biegeradius kabel Rayon de courbure du cable Raggio di curvatura del cavo		R 25 MIN, α 90°

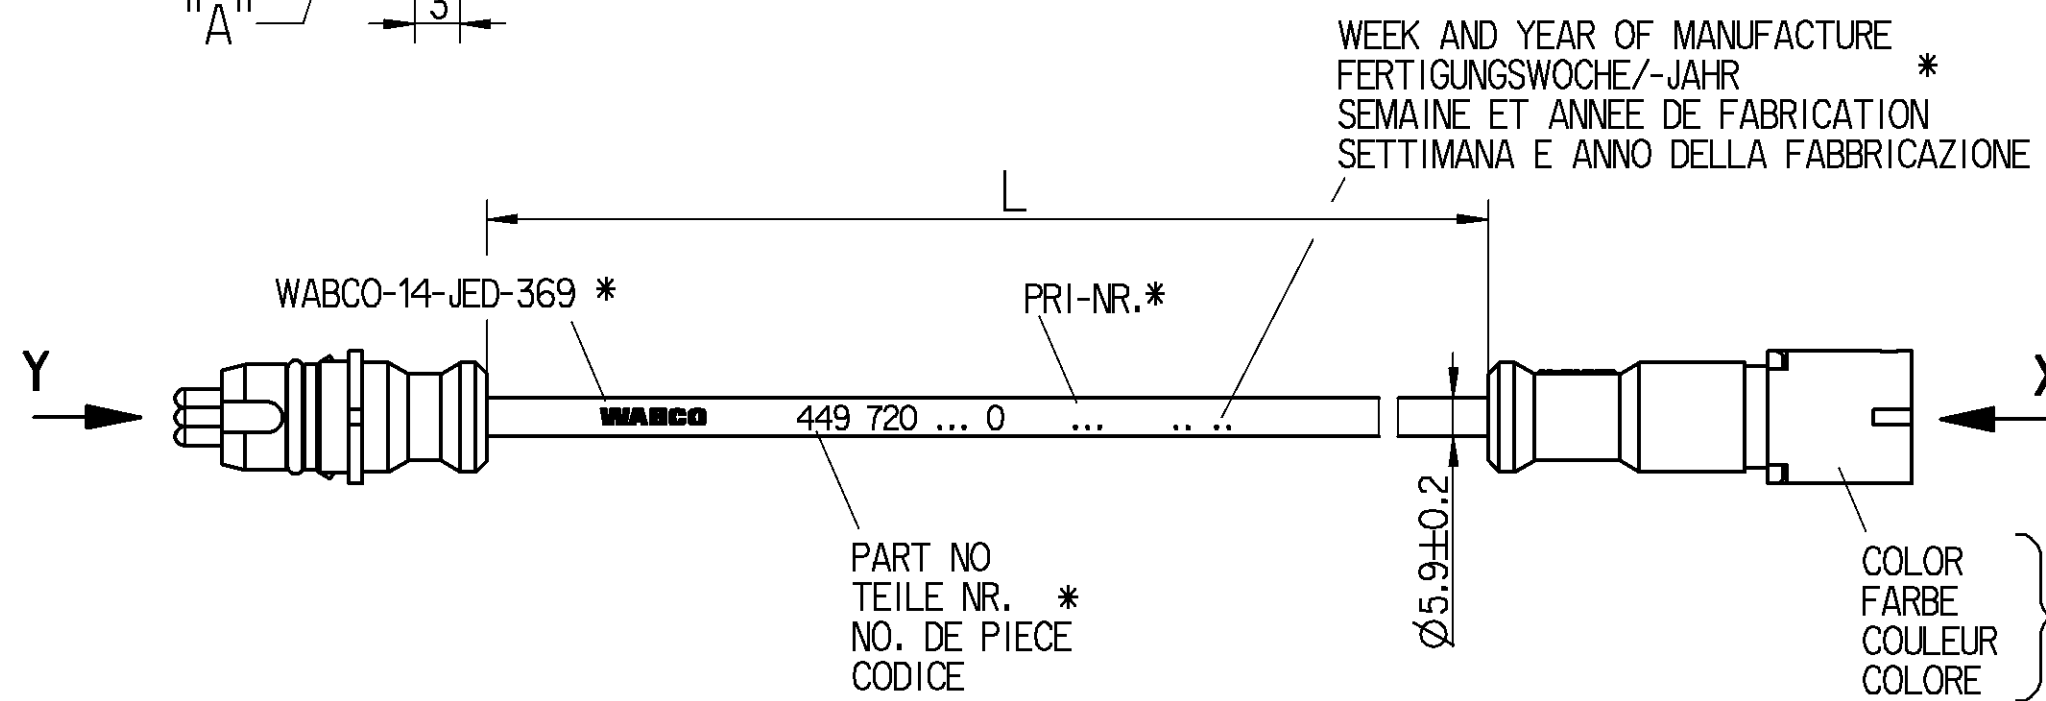

COLOR
FARBE
COULEUR
COLORE

ORANGE
ORANGE
ORANGE
ARANCIONE

LENGTH OF CABLE
KABELLAENGE
LONGUEUR DU CABLE
LUNGHEZZA DEL CAVO

L [m] *

* ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANCE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE } RAL 9001

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	$L[m]$ 449 720 ☐ ☐ , ☐ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	$L = \underline{5}m$ 449 720 <u>050</u> 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	$L_{\min} = 0.1m$ $L_{\max} = 20m$
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	$L \leq 10m \pm 0.050m$ $L > 10m \pm 0.075m$

RESISTANT TO BESTAENDIG GEGEN RESISTANT A RESISTENTE A	} AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTSpray LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRUEHNEBEL AIR, EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA
DEGREE OF PROTECTION (IN CONNECTION WITH CONNECTOR) SCHUTZART (IN VERBINDUNG MIT KUPPLUNG) DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR) GRADO DI PROTEZIONE (IN COLLAGAMENTO CON CONNETTORE)	} IP 68/69K EN 60529/IEC 529

GENERAL SPECIFICATION: JED-334-0							PRO/ENGINEER DRAWING COPYRIGHT				WABCO							
FURTHER TECHNICAL DATA:							DATE		SIGNATURE									
DOC. CODE:							DRAWN		HARNISCHM.									
SHEET: TO							CHECKED		01-12-11		CABLE WITH CONNECTOR PLUG/SOCKET							
GENERAL TOLERANCES							01-12-11		GRUENDCKER		KABEL MIT KUPPLUNGSSTECKER/DOSE							
RANGE OF NOMINAL DIMENSIONS (± mm)							EXPERT CODE				CABLE AVEC CONNECTEUR MALE/FEMELLE							
							7 5 5				CAVO CON CONNETTORE							
CLASS 1) ≤ 50 > 50 > 180 ≤ 180 ≤ 400 > 400							MASS		SCALE		PRODUCT IDENTIFICATION NO.							
FINE 0.5 1.0 1.5 2.0							/ KG		1:1 2:1		449 720 000 0							
MEDIUM 1.0 2.0 3.0 4.0							SIZE		TRI									
COARSE X 2.0 3.5 5.0 6.5							A 2		142		FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR	
TAPPED HOLES ACC. ISO 4039 / JED-152															1 2		X	
1) TOLERANCE CLASS APPLIED CROSSMARKED							DON-NO.		REV.		DATE							