
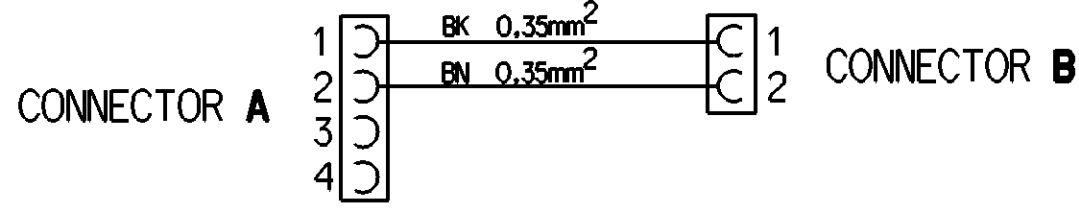
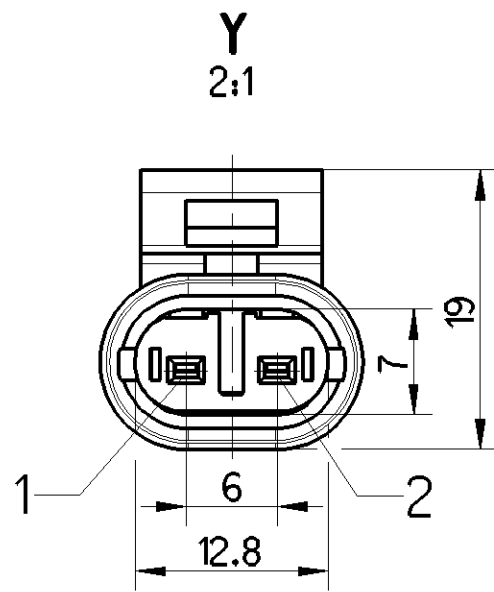
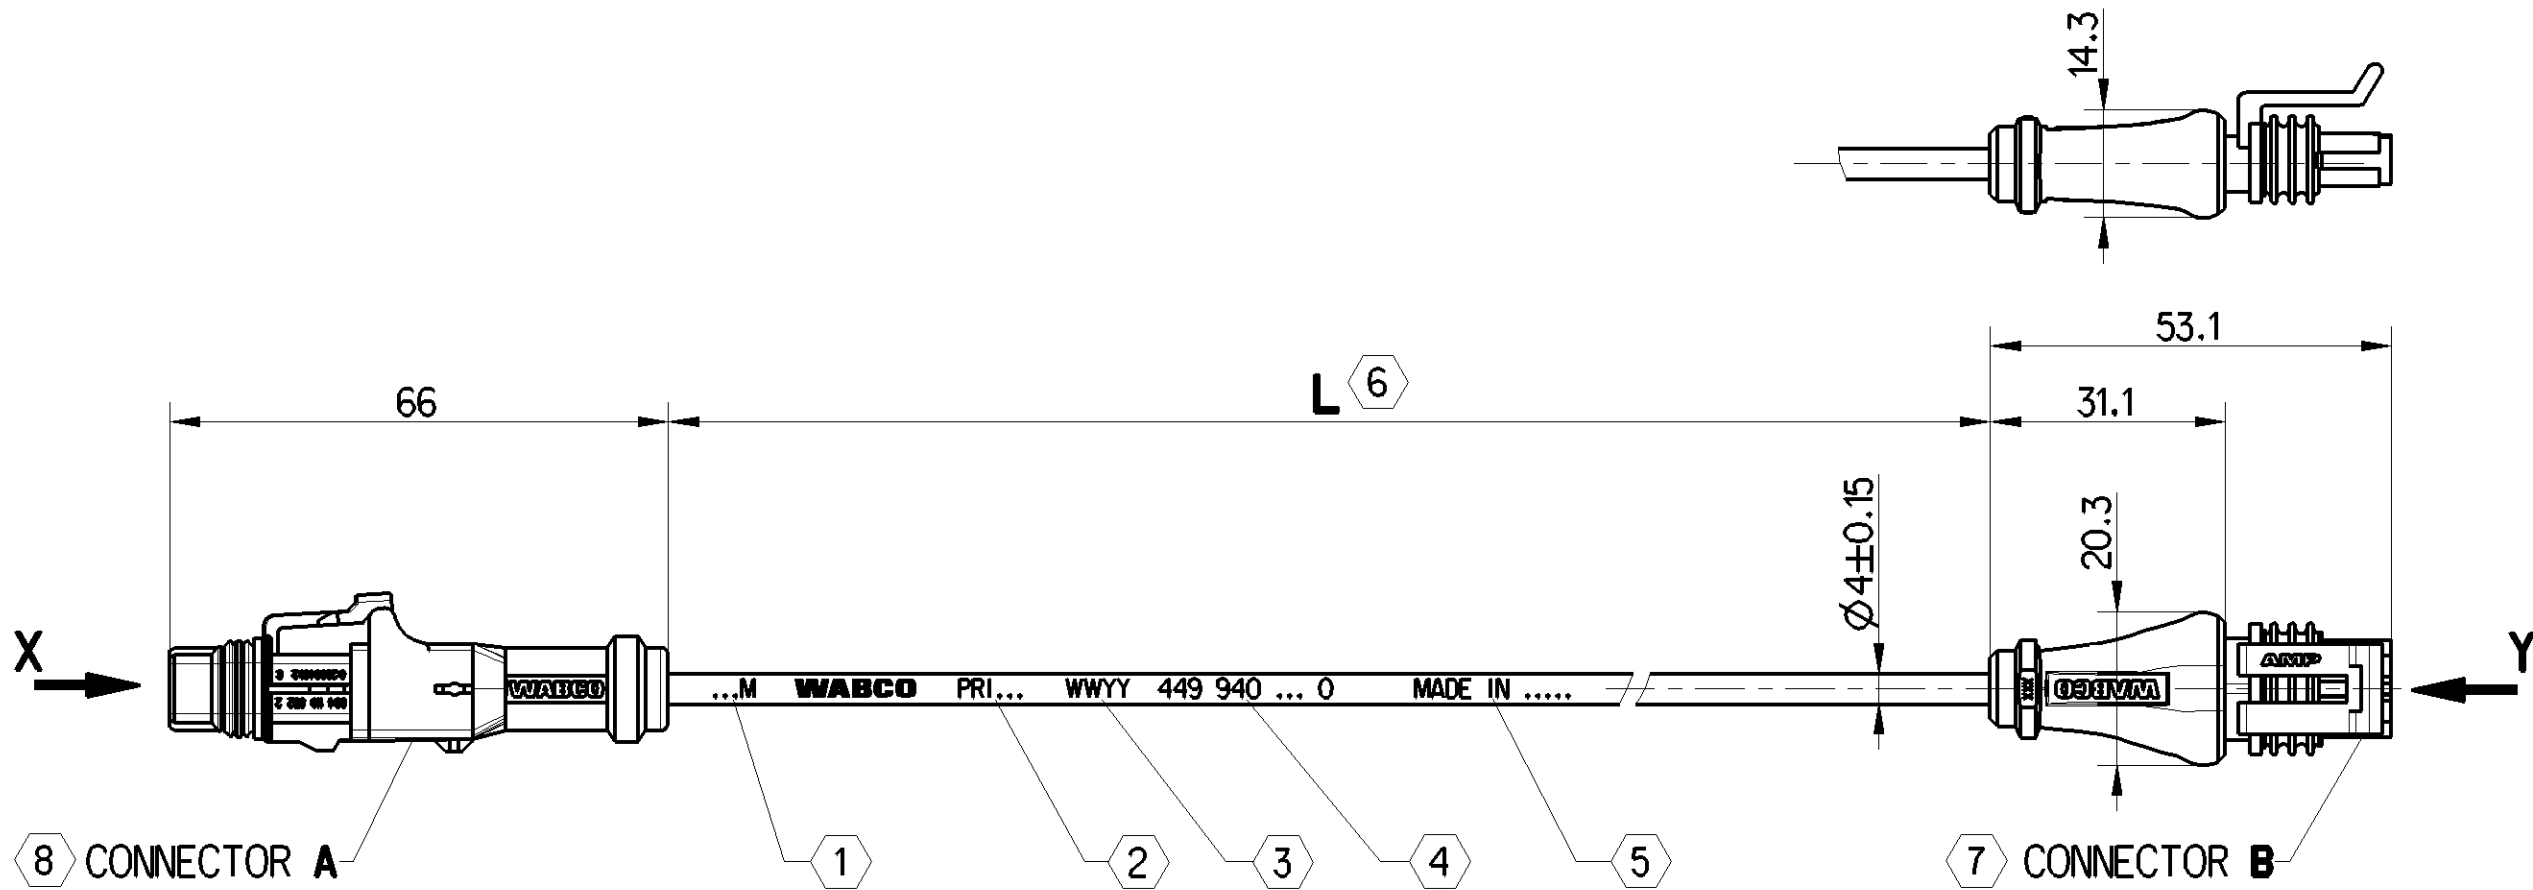


Non e' permesso cedere, o terzi o riprodurre questo documento, ne utilizzare il contenuto a renderlo comunque noto o terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Touta communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur ou ses auteurs a des dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modes.

Wskazanie swego wykorzystania tego dokumentu, jego reprodukcja, rozpowszechnienie, wykorzystanie jego zawartosci, bez uprzedniego pisemnego zezwolenia WABCO, stanowi naruszenie praw WABCO. Wskazanie swego wykorzystania tego dokumentu, jego reprodukcja, rozpowszechnienie, wykorzystanie jego zawartosci, bez uprzedniego pisemnego zezwolenia WABCO, stanowi naruszenie praw WABCO.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

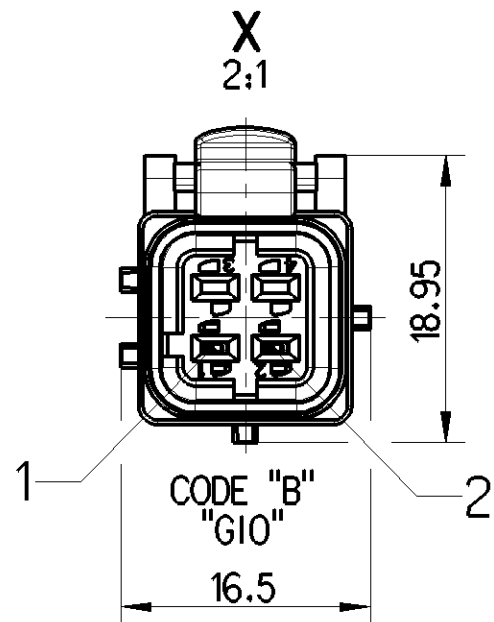

- 1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 2 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 3 DATE OF MANUFACTURE
WABCO IDENTIFICATION NUMBER 449 940 XXX 0
- 4 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 5 DEGREE OF PROTECTION (IN CONNECTION WITH PLUG):
CONNECTOR A: IP 6K6K / IP 6K9K / IP 6K7
CONNECTOR B: IP 6K7 (ISO 20653)

THERMAL RANGE OF APPLICATION: -40°C ... +80°C

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

CONTACTS' SURFACE PROTECTION:
CONNECTOR A, B: Sn

CABLE: PUR 2x0,35 mm²

MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED.
SEE DOCUMENT: 449 000 000 0 / 011

FIELD OF APPLICATION: TRAILER

- 8 MATING DEVICE CONNECTION, INSTALLATION INSTRUCTIONS AND
FURTHER TECHNICAL DATA - SEE SYSTEM SPEC. OF MODULATOR
- 7 2 POS. AMP SUPERSEAL CONNECTOR

COLOUR CODING
FOR WIRES:
BK - BLACK
BU - BLUE
BN - BROWN
GN - GREEN
RD - RED
WH - WHITE
YE - YELLOW
VT - VIOLET
PK - PINK

6 CODE OF LENGTH	
PART NO	L[m] 449 940 □□.□ 0
EXAMPLE	L = 10m 449 940 100 0
MIN/MAX LENGTH	L _{min} = 0,2m L _{max} = 20m
TOLERANCES	L ≤ 10m ± 0,050m L > 10m ± 0,075m

General Specification: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO CABLE WITH SOCKET	
Further Technical Data:		Date	Signature		
Doc. Code: Sheet: To		2021-08-28	Osinski		
General Tolerances JED-261		2021-08-31	Grychowicz		
Range of Nominal Dimensions (± mm)		Expert		Overhage	
Class 1)		Mass		Scale	
Fine		/ KG		1:1	
Medium		Size		2:1	
Coarse		CAD System		A 2	
Tapped Holes acc.		ECN-No.		Revision	
1) Tolerance Class Applied Crossmarked		508341		5 x A	
		Techn. Resp.		6930_WH	
		Date of first issue: 2020-06-11		Doc.Code	
		Language		EN	
		Sheet		1/1	
		Replacement for			