


NON E' PERMESSO CONSERVARE A TERZI O RIPRODURRE QUESTO DOCUMENTO, NE UTILIZZARE IL CONTENUTO O RENDERSI RESPONSABILI PER L'USO INCONGRUO. IL DIRITTO DI PROPRIETA' E' RISERVATO AL PROPRIETARIO. KEIL
TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CONTENU
EST INTERDITE. IL DIRITTO DE PROPRIETE' EST RESERVE' AU PROPRIETAIRE. KEIL
WEDERABE SOWIE Vervielfaltigung dieses Unterlage, Vervielfaltigung und Mitteilung ihres Inhalts nicht
erlaubt ist. Das Recht der Verwertung des Werkes ist vorbehalten. KEIL
GEBRAUCHSMUSTER-ENTWURF VORBEREITEN.

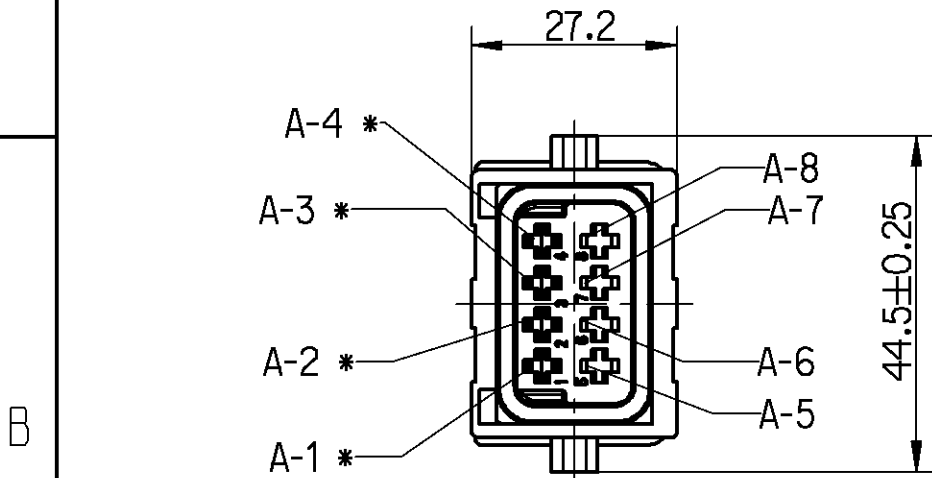

4-CORE CABLE
LEITUNG 4-ADRIG
CABLE A 4 CONDUCTEURS
CAVO A 4 CONDUTTORI

PUR
1x 1.5 mm² + 3x 2.5 mm²

OR
ODER 2x AWG12 + AWG 14 + AWG 16
OU
O

RESISTANT TO: AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
BESTAENDIG GEGEN : LUFT, WASSER, MINERAL OEL, BENZIN, DIESEL OEL, SALZSPRUEHNEBEL
RESISTANT A: AIR, EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A: ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) :
SCHUTZART (IN VERBINDUNG MIT STECKER) :
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) :
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) :

IP 6K 9K
IP 67
DIN 40 050 T9

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH :
GAMME D'APPLICATION THERMIQUE :
CAMPO TERMICO D'APPLICAZIONE :


-40° C+80° C

CHAMBER KAMMER CHAMBRE CAMERA	CROSS SECTION QUERSCHNITT SECTION DI TRANSVERSALE SEZIONE TRANSVERSALE	COLOUR FARBE COULEUR COLORE
A-1	1.5 mm ² OR AWG 16	WH/GN
A-2	2.5 mm ² OR AWG 14	RD
A-3	2.5 mm ² OR AWG 12	BU
A-4	2.5 mm ² OR AWG 12	WH
A-5	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)	
A-6	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)	
A-7	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)	
A-8	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)	

* SURFACE PROTECTION
OBERFLAECHENSCHUTZ
PROTECTION DE SURFACE
PROTEZIONE SUPERFICI

Sn

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	L[m] 449 328 □ □, □ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 5_m 449 328 050 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L_min = 0.1m L_max = 8m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	±0.050m

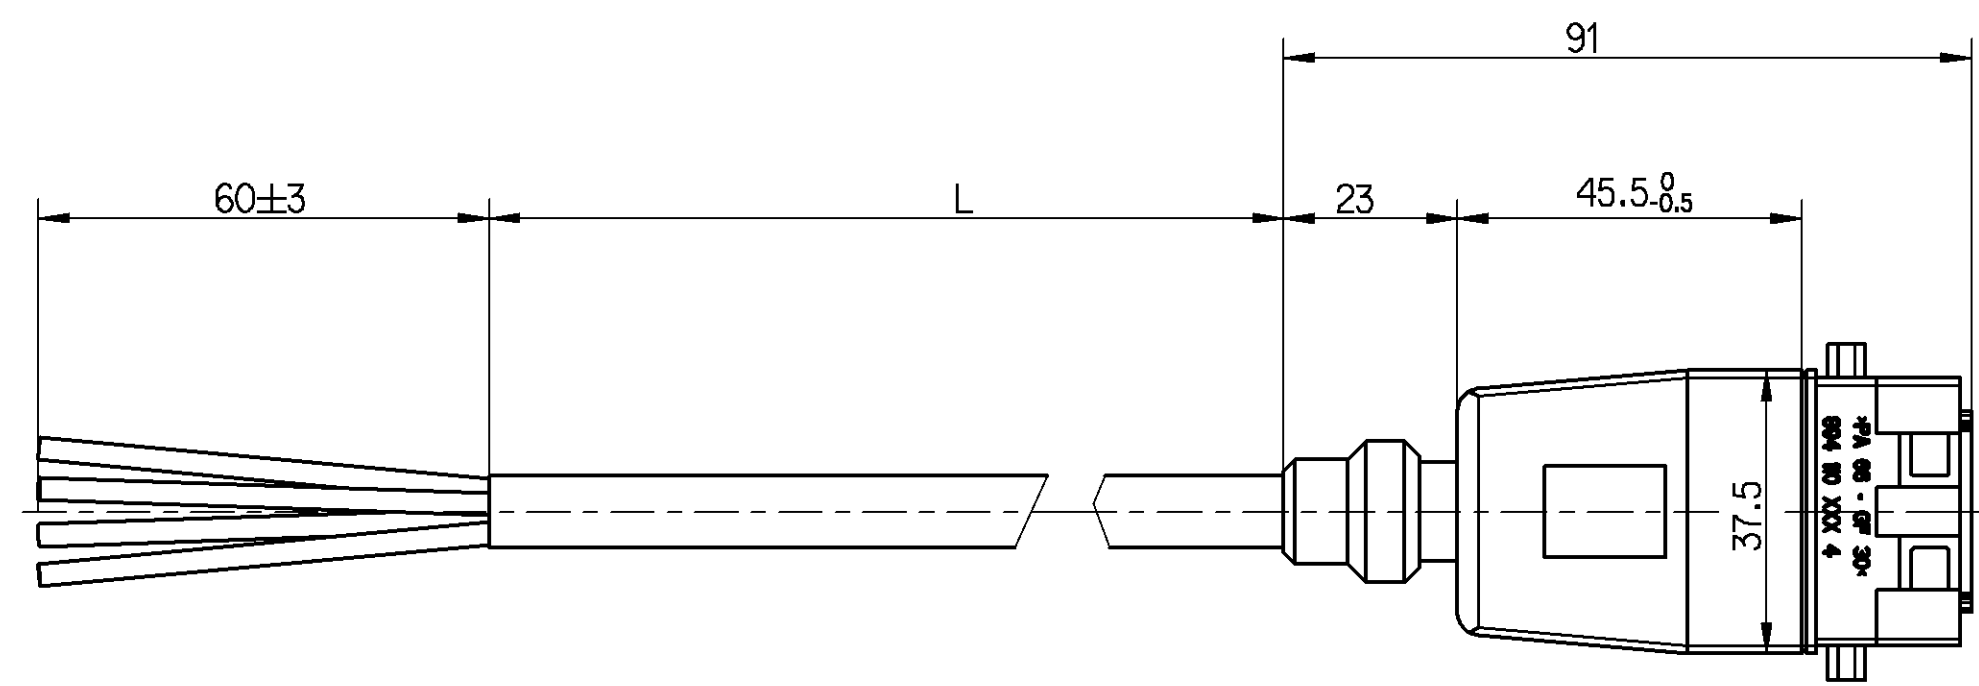

GENERAL SPECIFICATION:					JED-334-0					Pro/ENGINEER DRAWING COPYRIGHT					WABCO																										
FURTHER TECHNICAL DATA:										DATE										SIGNATURE																					
DOC. CODE:					SHEET:					TO										DRAWN																					
																				SUPPLY CABLE VERSORGUNGSKABEL CABLE D'ALIMENTATION CAVO DI ALIMENTAZIONE																					
GENERAL TOLERANCES																																									
RANGE OF NOMINAL DIMENSIONS (± mm)																																									
CLASS		1)	≤ 50		> 50		> 180		≤ 180		≤ 400		> 400		00-11-28 HEYDA CHECKED 00-11-28 OVERHAGE EXPERT CODE 7 7 4																										
FINE			0.5		1.0		1.5		2.0																																
MEDIUM			1.0		2.0		3.0		4.0																																
COARSE			2.0		3.5		5.0		6.5																																
TAPPED HOLES ACC. ISO 4039 / JED-152																				PRODUCT IDENTIFICATION NO.																					
1) TOLERANCE CLASS APPLIED CROSSMARKED										DCN-NO.					REV.					DATE					KG		1:1		449 328 000 0					DOC. CODE		SHEET					
																									SIZE		TRI							653		1/1					
																									A 2		1 4 2				FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR				
																															1 1		☒								

First production samples, samples from new or modified moulds or changes of every kind must be approved Engineering Department

Teile der ersten Produktion, Teile aus neuen oder geenderten Formwerkzeugen oder Aenderungen jeglicher Art beduerfen der Genehmigung durch die Entwicklungsabteilung

Les premieres pieces de production, les pieces provenant de nouveaux moules ou de moules modifies, ou toutes autres modification, doivent etre approuvees par le departement des etudes

Campioni di inizio produzione, campioni ottenuti con stampi nuovi o modificati o con qualsiasi genere di modica devono essere approvati dall'ufficio tecnico.