

SOCKET
GERÄTESTECKDOSE
PRISE DE COURANT
PRESA DI CORRENTE

A

SOCKET
 GERAETESTECKDOSE
 PRISE DE COURANT
 PRESA DI CORRENTE

B

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

-40°C...+80°C

TYPE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT STECKER)
MODE DE PROTECTION (DANS CONNECTION AVEC FICHE)
TIPO DI PROTEZIONE (IN RELAZIONE CON SPINA)

A IP 67, IP 6K9K


3-CORE CABLE
LEITUNG 3-ADRIK
CABLE A 3-CONDUCTEURS
CAVO A 3-CONDUTTORI

PUR
3x1,5mm²

RESISTANT TO
BESTÄNDIG GEGEN
RESISTANT A
RESISTENTE A


AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALTS PRAY
 LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRUEHNEBEL
 AIR, EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN
 ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA, SALINA

	SURFACE PROTECTION	:	
	OBERFLAECHENSCHUTZ	:	
*	PROTECTION DE SURFACE	:	Sn
	ROTEZIONE SUPERFICI	:	


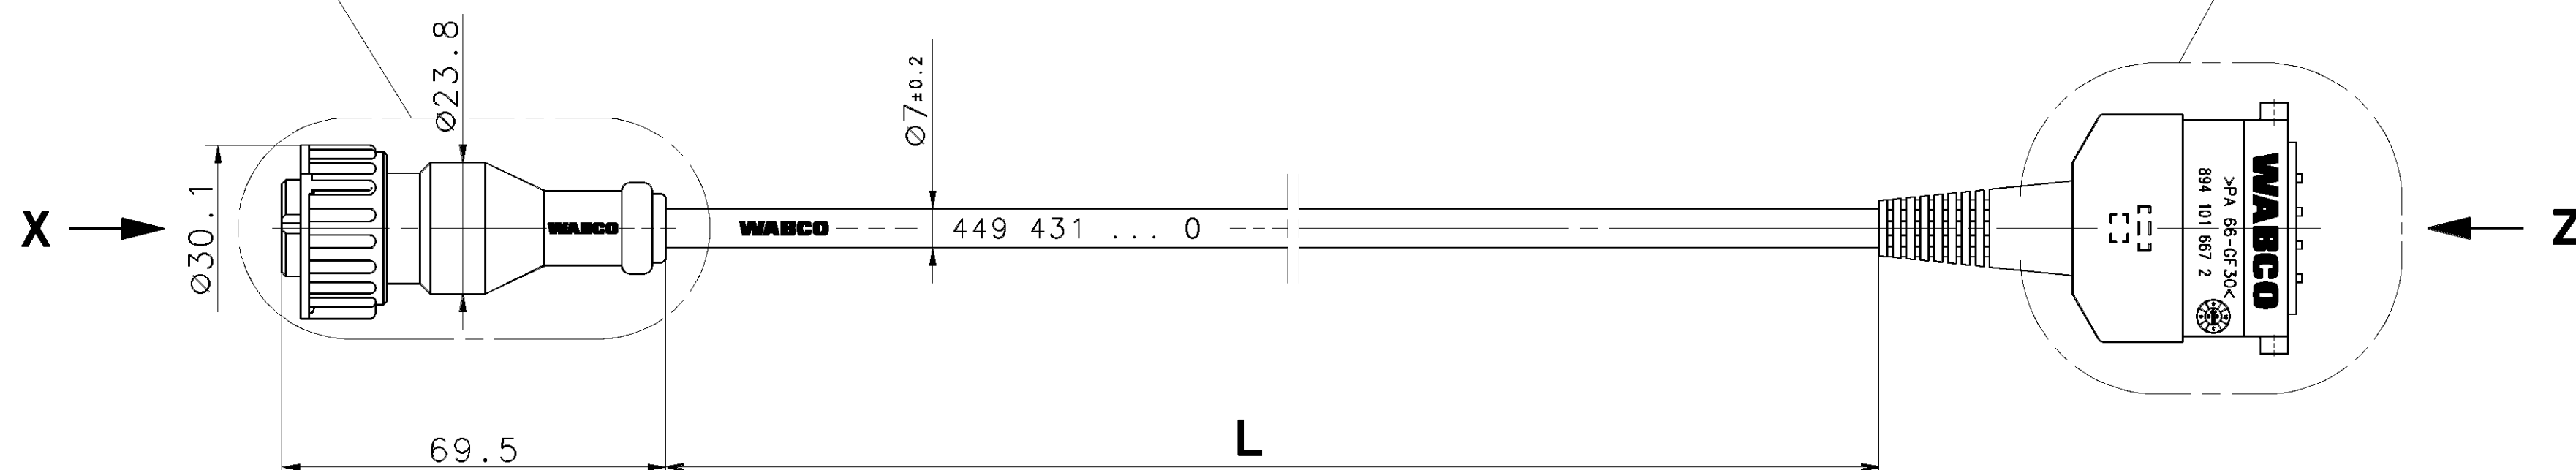


x 2 : 1

CODE
CODIERUNG **DIN 72585-B1-3.1-Sn/K1**
CODE
CODICE

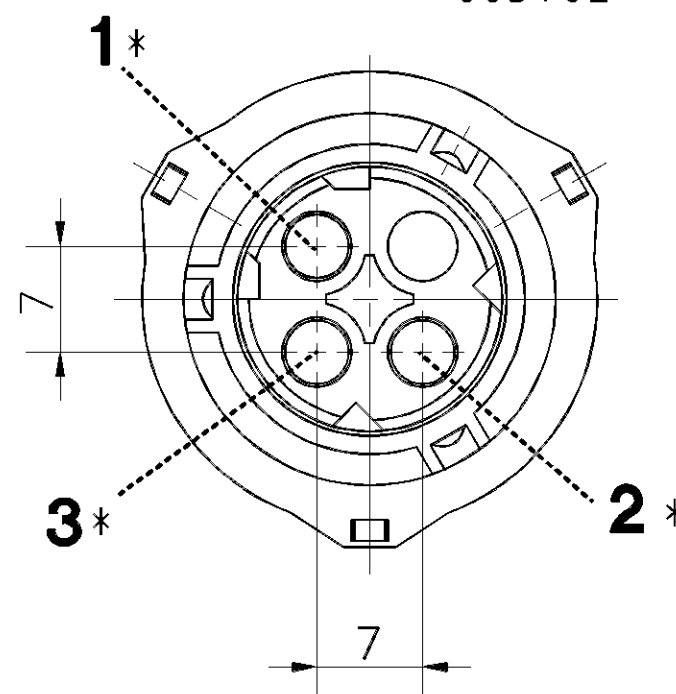

Z 2:1

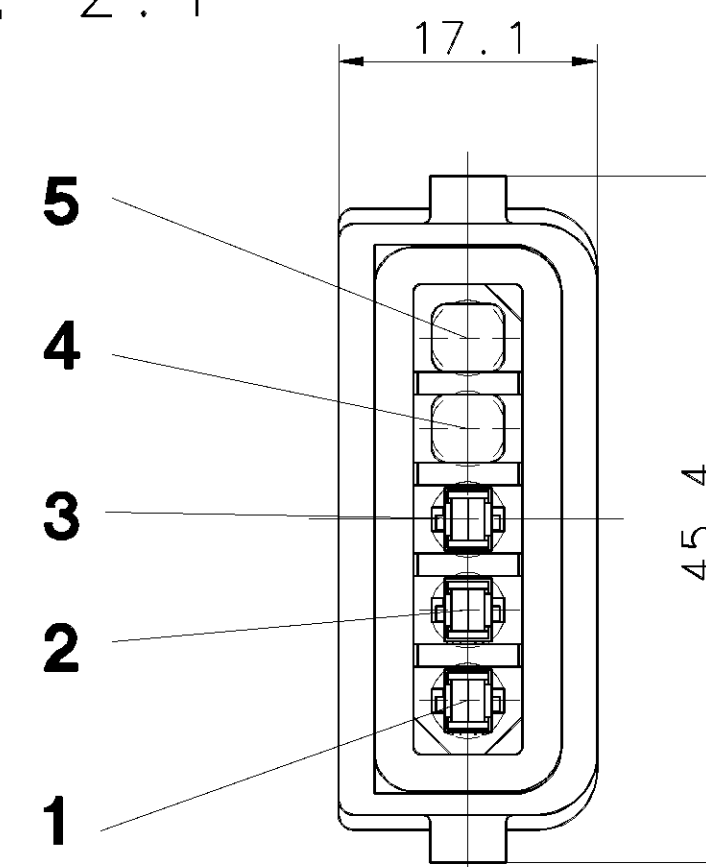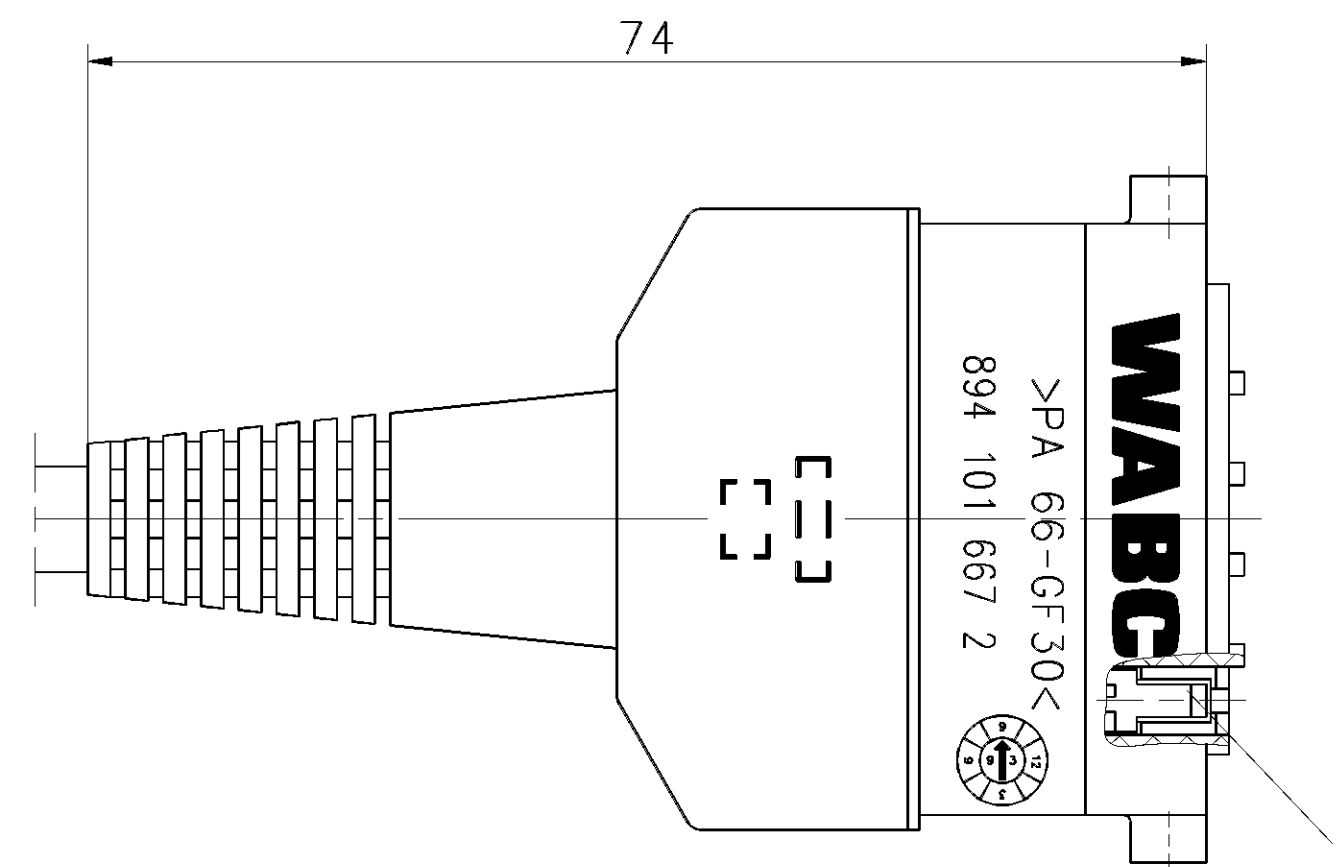 $2:1$ 

First production samples, samples from new or modified moulds or changes of every kind must be approved by Engineering Department. Teile der ersten Produktion, Teile aus neuen oder geänderten Werkzeugen oder Änderungen jeglicher Art bedürfen der Genehmigung durch die Entwicklungsabteilung. Les premières pièces de production, les pièces provenant de nouveaux moules ou de moules modifiés, ou toutes autres modifications, doivent être approuvées par le département des études. Campioni di inizio produzione, campioni ottenuti con stampi nuovi o modificati, o con qualsiasi genere di modifica devono essere approvati dall'Ufficio Tecnico.

CHAMBER IN : KAMMER IN : CHAMBRE EN : CAMERA IN :	A	COLOR OF CORE ADERFARBE COULEUR DU FILS COLORANTE DEL FILI	CHAMBER IN : KAMMER IN : CHAMBRE EN : CAMERA IN :	B	CROSS SECTION QUERSCHNITT SECTION DE TRANSVERSALE SEZIONE TRASVERSALE
2	Ⓐ	YELLOW/GREEN GELB/GRUEN JAUNE/VERT GIALLO/VERDE	3		1.5 mm ²
1	Ⓐ	BLUE BLAU BLEU BLU	1		1.5 mm ²
3		BROWN BRAUN BRUN BRUNO	2		1.5 mm ²
			4		NOT CONNECTED NICHT BELEG NE PAS CONNECTE NON COLLEGATO
			5		NOT CONNECTED NICHT BELEG NE PAS CONNECTE NON COLLEGATO

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
ORDER NUMBER BESTELLNUMMER NUMERO DE COMMANDE NUMERO DELL'ORDINE	L [m] 449 431 0 ,
EXAMPLE BEISPIEL EXAMPLE ESEMPIO	L = 6m 449 431 060 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	$L_{\min} = 0.1\text{m}$ $L_{\max} = 20.0\text{m}$
TOLERANCES TOLERANZEN TOLERANCES TOLRANZA	$L \leq 10\text{m} \quad \begin{matrix} +0.100 \\ -0.050 \end{matrix}$ $L > 10\text{m} \quad \begin{matrix} +0.125 \\ -0.075 \end{matrix}$

* * DIN 16 901-150

GENERAL SPECIFICATION: JED-334 * *				CADAM-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE SIGNATURE			
DOC. CODE: SHEET: TO				DRAWN:		CABLE WITH SOCKET	
GENERAL TOLERANCES				98-09-10 WEBER		KABEL MIT GERAETESTECKDOSE	
RANGE OF NOMINAL DIMENSIONS (± mm)				CHECKED:		CABLE AVEC PRISE DE COURANT	
CLASS 1) > 50 > 180 > 400				98-09-10 OVERHAGE		CAVO CON PRESA DI CORRENTE	
FINE 0,5 1,0 1,5 2,0				STANDARDIZATION:			
MEDIUM 1,0 2,0 3,0 4,0				98-09-10			
COARSE 2,0 3,5 5,0 6,5							
TAPPED HOLES ACC. ISO 4039 / JED-152		073314 2x4 98-12-06		MASS SCALE		PRODUCT IDENTIFICATION NO.	
1) TOLERANCE CLASS APPLIED CROSSMARKED		DCN-NO. REV. DATE		% 1 : 1 40 (2:1)		DOC. CODE SHEET	
				SIZE 1:1		449 431 000 0 653 1/1	
				A 1 142		SHAPE CODE REPLACEMENT FOR	
				100mm		EXPERT CODE 7774	
						PRODUCT TYPE 1111	