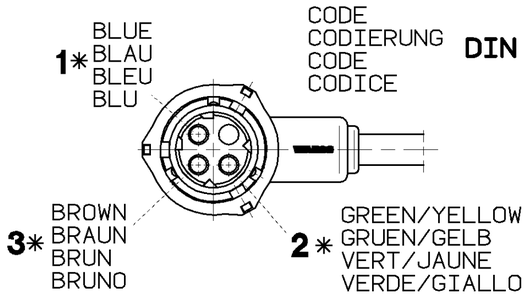

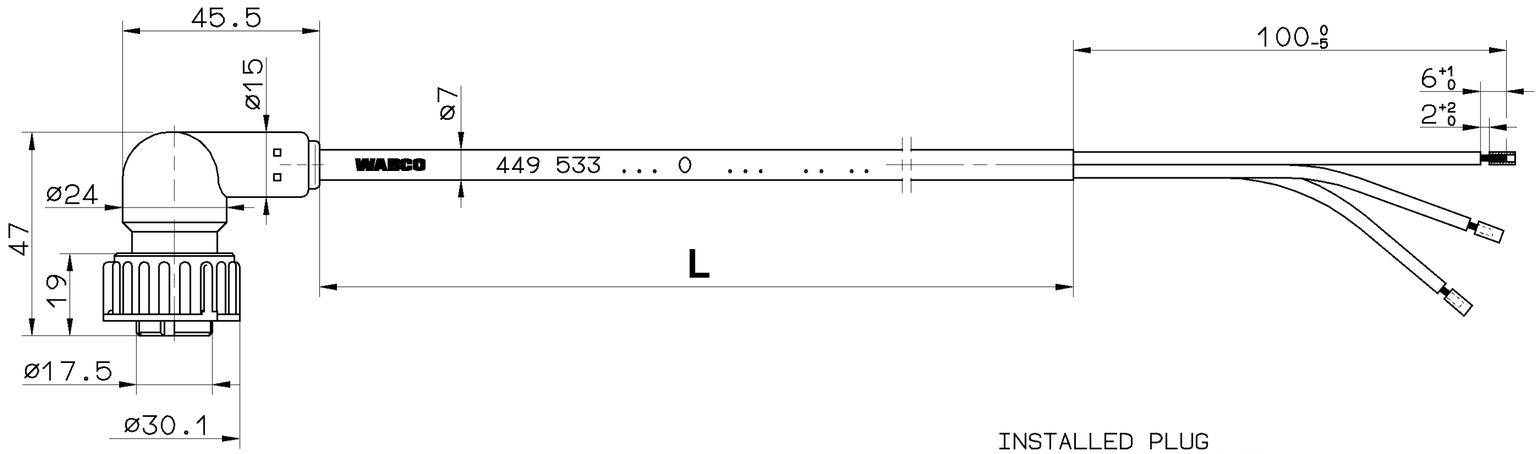

INSTALLED PLUG
MONTIERTER STECKER
FICHE MONTEE
SPINA MONTATO

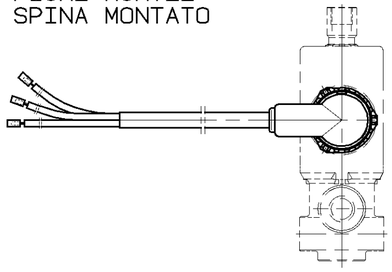

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
ORDER NUMBER BESTELLNUMMER NUMERO DE COMMANDE NUMERO DELL'ORDINE	L[m] 449 533 □□,□ 0
EXAMPLE BEISPIEL EXAMPLE ESEMPIO	L = 12m 449 533 120 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L_{min} = 0.1m L_{max} = 20.0m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L ≤ 10m ±0.050m L > 10m ±0.075m

* SURFACE PROTECTION :
* OBERFLAECHENSCHUTZ : Sn
* PROTECTION DE SURFACE :
* PROTEZIONE SUPERFICI :

THREE CORE CABLE
LEITUNG DREIADRIG — PUR
CABLE A TROIS CONDUCTEURS — 3×1.5mm²
CAVO A TRE CONDUTTORI

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH — -40°C...+80°C
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

RESISTANT TO — AIR,WATER,MINERAL OIL,PETROL,DIESELOIL,SALTSPRAY
BESTAENDIG GEGEN — LUFT,WASSER,MINERALOEL,BENZIN,DIESELOEL,SALZSPRUEHNEBEL
RESISTANT A — AIR,EAU,HUILE MINERALE,ESSENCE,GASOIL,BROUILLARD SALIN
RESISTENTE A — ARIA,AQUA,OLIO,MINERALE,BENZINA,GASOLIO,NEBBIA SALINA

TYPE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT STECKER) — IP 6K 7
MODE DE PROTECTION (DANS CONNECTION AVEC FICHE) — IP 6K 9K
TIPO DI PROTEZIONE (IN RELAZIONE CON SPINA)

** DIN 16901-150

GENERAL SPECIFICATION: JED-334 **					
FURTHER TECHNICAL DATA:					
DOC. CODE:	SHEET: TO				
GENERAL TOLERANCES					
CLASS 1)	RANGE OF NOMINAL DIMENSIONS (± mm) ≤50	>50 ≤180	>180 ≤400	>400	
FINE	0,5	1,0	1,5	2,0	± 3°
MEDIUM	1,0	2,0	3,0	4,0	
COARSE	2,0	3,5	5,0	6,5	
TAPPED HOLES ACC. ISO 4039 / JED-152					
1) TOLERANCE CLASS APPLIED CROSSMARKED					

DCN-NO.	REV.	DATE

CADAM-DRAWING COPYRIGHT		
DATE	SIGNATURE	
DRAWN: 97-09-30	WEBER	
CHECKED: 97-09-30	OVERHAGE	
STANDARDIZATION: 97-09-30		

WABCO

CABLE WITH SOCKET
KABEL MIT GERAETESTECKDOSE
CABLE AVEC PRISE DE COURANT
CAVO CON PRESA DI CORRENTE

MASS	SCALE	PRODUCT IDENTIFICATION NO.	DOC. CODE	SHEET
/ KG	2:1 (1:1)	449 533 000 0	653	1/1
SIZE A 2	T.R.I. 142	SHAPE CODE	REPLACEMENT FOR	

EXPERT CODE 7 7 4 — PRODUCT TYPE 1 1 ☒

100mm

1809/012/3/04.93 — 605/653

TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CONTENU NON AUTORISÉES SONT EXPRESSÉMENT PROHIBÉES. TOUS DROITS RÉSERVÉS EN CAS DE DÉPOSE DE BREVET, DE DÉPOT DE MODÈLE INDUSTRIELLE RESERVES. NOTAMMENT EN MATIERE DE BREVETS ET DE MODELES.

MEITERGABE SOWIE VERVIELFÄLTIGUNG DIESER UNTERLAGE, VERWERTUNG UND MITTEILUNG IHRES INHALTS NICHT GESTATTET SOWEIT NICHT AUSDRÜCKLICH ZUGESTANDEN. ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENSERSATZ. ALLE RECHTE FÜR DEN FALL DER PATENTERTEILUNG ODER MEISSRAUCH DAR UND VERPFLICHTEN ZU SCHADENSERSATZ. ALLE RECHTE FÜR DEN FALL DER PATENTERTEILUNG ODER GEBRAUCHSMUSTER-EINTRAGUNG VORBEHALTEN.

NON È PERMESSO CONSEGNARE A TERZI O RIPRODURRE QUESTO DOCUMENTO, NE UTILIZZARNE IL CONTENUTO O RENDERNE ESPLICITO IL CONTENUTO, SALVO ESPRESSA AUTORIZZAZIONE. IN CASO DI DEPOSITO DI BREVETTO O DI MODELLO, TUTTI I DIRITTI RISERVATI DA ABUSO COMPORTA IL RISARCIMENTO DEI DANNI. SI RISERVA IL DIRITTO DI PROPRIETÀ DA ABUSO DI BREVETTO O MODELLO.

COPYING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF, ARE FORBIDDEN UNLESS EXPRESSLY AUTHORIZED. OFFENDERS ARE LIABLE TO PAY DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE GRANT OF PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN. THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.