



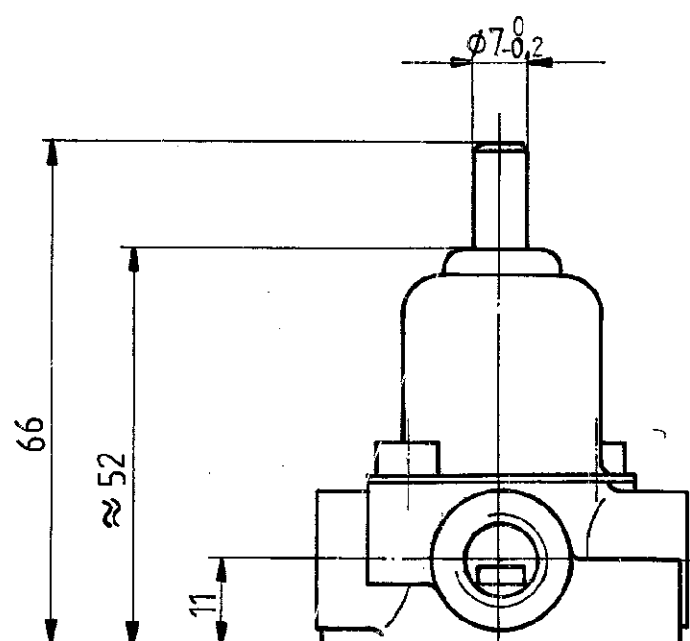

OPERATING ANGLE
BETAETIGUNGSWINKEL
ANGLE DE COMMANDE
ANGOLA DI COMANDO

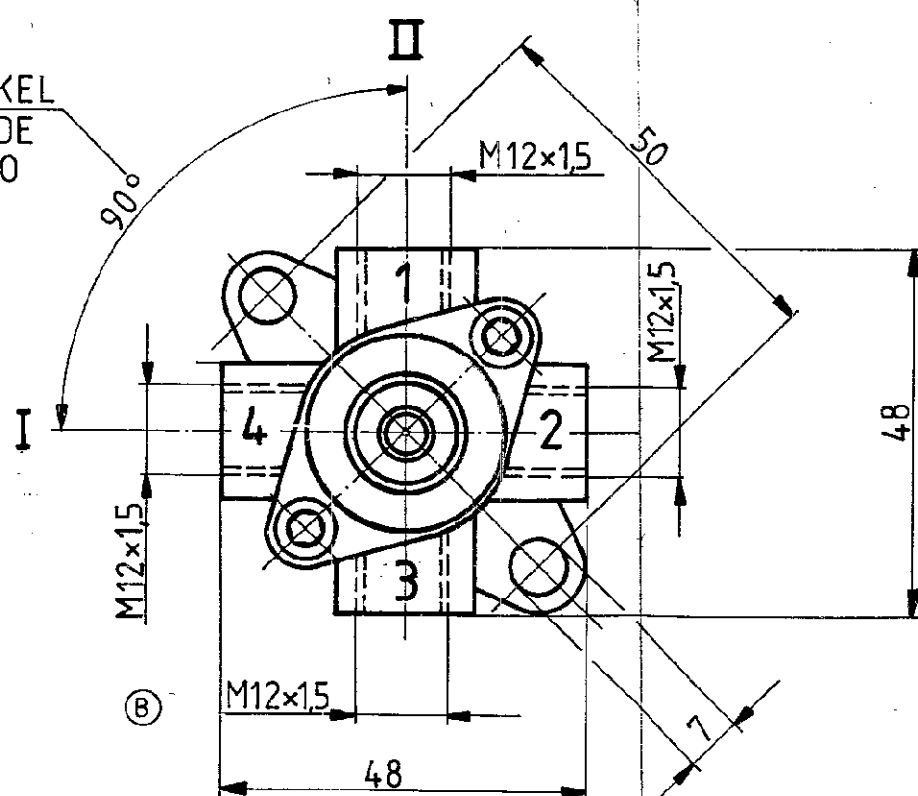


CONTROL POSITION
SCHALTSTELLUNG
POSITION DE COMMANDE
POSIZIONE DI COMANDO

1 = SUPPLY OF ENERGY
ENERGIEZUFLUSS
ALIMENTATION D'ENERGIE
ALIMENTAZIONE DI ENERGIA

3 = DELIVERY OF ENERGY
ENERGIEABFLUSS
UTILISATION D'ENERGIE
UTILIZZAZIONE DI ENERGIA

2 = EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

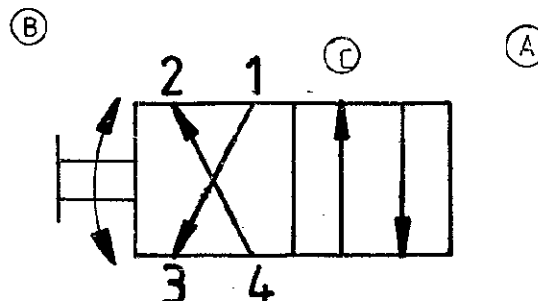

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE D'ESERCIZIO
pe max. 8 bar

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA
-40°C ... +80°C

③ FULL THREAD LENGTH
NUTZBARE GEWINDELAENGE
LONGUEUR UTILE
LUNGHEZZA UTILE
min. 12 mm

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)					FORCE, POWER, PRESSURE ETC.			
	0	≤ 50	> 50 ≤ 100	> 100 ≤ 400	> 400		0	(± %)	1
I		0.5	1	15	2			5	
II		1	2	3	4			10	
III		2	3.5	5	6.5			20	

TAPPED HOLES ACC. ISO 4039
1) TOLERANCE CLASS APPLIED CROSSMARKED

COPYRIGHT BY WABCO		WABCO	
DATE	SIGNATURE	4/2 DIRECT CONTROL VALVE	
79-11-13	<i>[Signature]</i>	DISTRIBUTEUR 4/2	
CHECKED		VALVOLA 4/2	
79-11-13		4/2 WEGEHANN	
STANDARDIZATION		IDENTIFICATION	
79-11-15		452 003 054 0	
MASS	SCALE	CODE FOR FUNCTION	
0.15	1:1	CODE FOR SHAPE	
SIZE	TRL	CODE FOR DOCUMENT	
A 2	14 0	605	