

WARNING LABEL
WARNSCHILD

CAPACITY
INHALT
CAPACITE
CAPACITA

0.32 dm³

NITROGEN FILLING PRESSURE
STICKSTOFFDRUCK
PRESSION DE REMPLISSAGE D'
AZOTO IN PRESSIONE

80 bar

OPERATING PRESSURE
ARBEITSDRUCKBEREICH
PRESSION DE SERVICE
PRESSIONE DI ESERCIZIO

130⁺⁴₋₂ BIS 170⁺¹⁰₋₈ bar

MAX. WORKING TEMPERATURE
ZUL. BETRIEBSTEMPERATUR
MAX. TEMPERATURE D'UTILISATION
MAX. TEMPERATURA DI ESERCIZIO

-40° C BIS +120° C

WORKING MEDIUM	BRAKE FLUID	
BETRIEBSMEDIUM	BREMSFLUESSIGKEIT	DOT3, DOT4
FLUIDE D'UTILISATION	FLUIDE HYDRAULIQUE GLYC.	
FLUIDO DI ESERCIZIO	FLUIDO IDRAULICO GLIC. ALC.	

DIAPHRAGM RESISTANT TO
MEMBRAN BESTAENDIG GEGEN
DIAPHRAGME RESISTANT AU
DIAFRAMMA RESISTENTE AL

DOT3, DOT4

BURST PRESSURE
BERST-DRUCK
PRESSION D'ECLATEMENT
PRESSIONE DI SCOPPIO

≥ 800 bar.






INSTALLATION POSITION
EINBAULAGE
POSITION D'INSTALLATION
POSIZIONE DI MONTAGGIO

OPTIONAL
BELIEBIG
A VOLONTE
A PIACERE

PAINT	RAL 9005	MINERAL OIL RESISTANT
LACKIERUNG	RAL 9005	MINERALÖLBESTÄNDIG
PEINTURE	RAL 9005	RESISTANT A' L' HUILE MINÉRALE
VERNICE	RAL 9005	RESISTENTE ALL' OLIO MINERALE

ALL PORTS ARE PLUGGED WITH PROTECTION CAPS
ALLE ANSCHLUESSE MIT SCHUTZKAPPEN VERSCHLOSSEN
TOUS LES ORIFICES OBTURES AVEC CAPUCHONS
TUTTI GLI ORIFIZI CHIUSI CON PROTETTORI

ALL PORTS
ALLE ANSCHLUESSE :M=12⁴ Nm
TOUS LES ORIFICES
TUTTI I ORIFIZZI

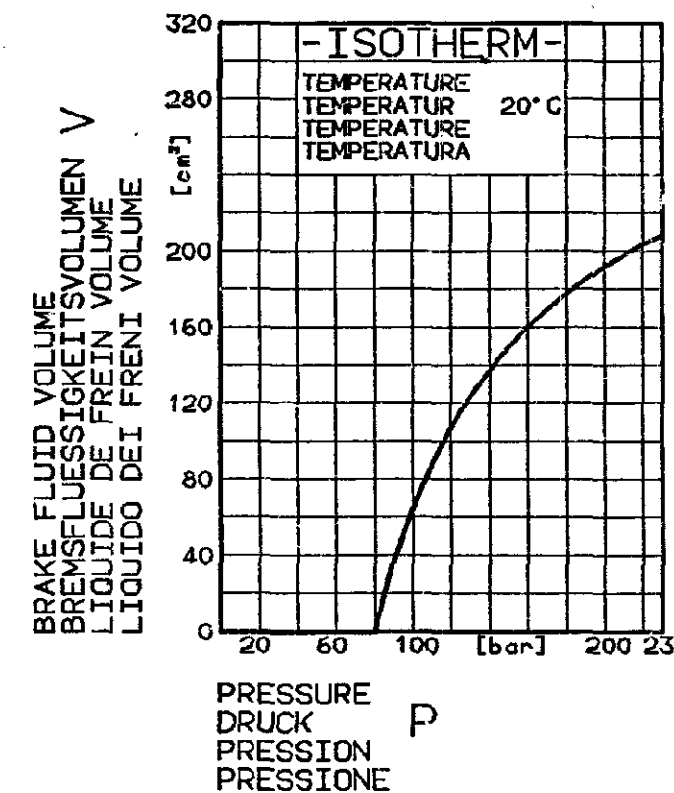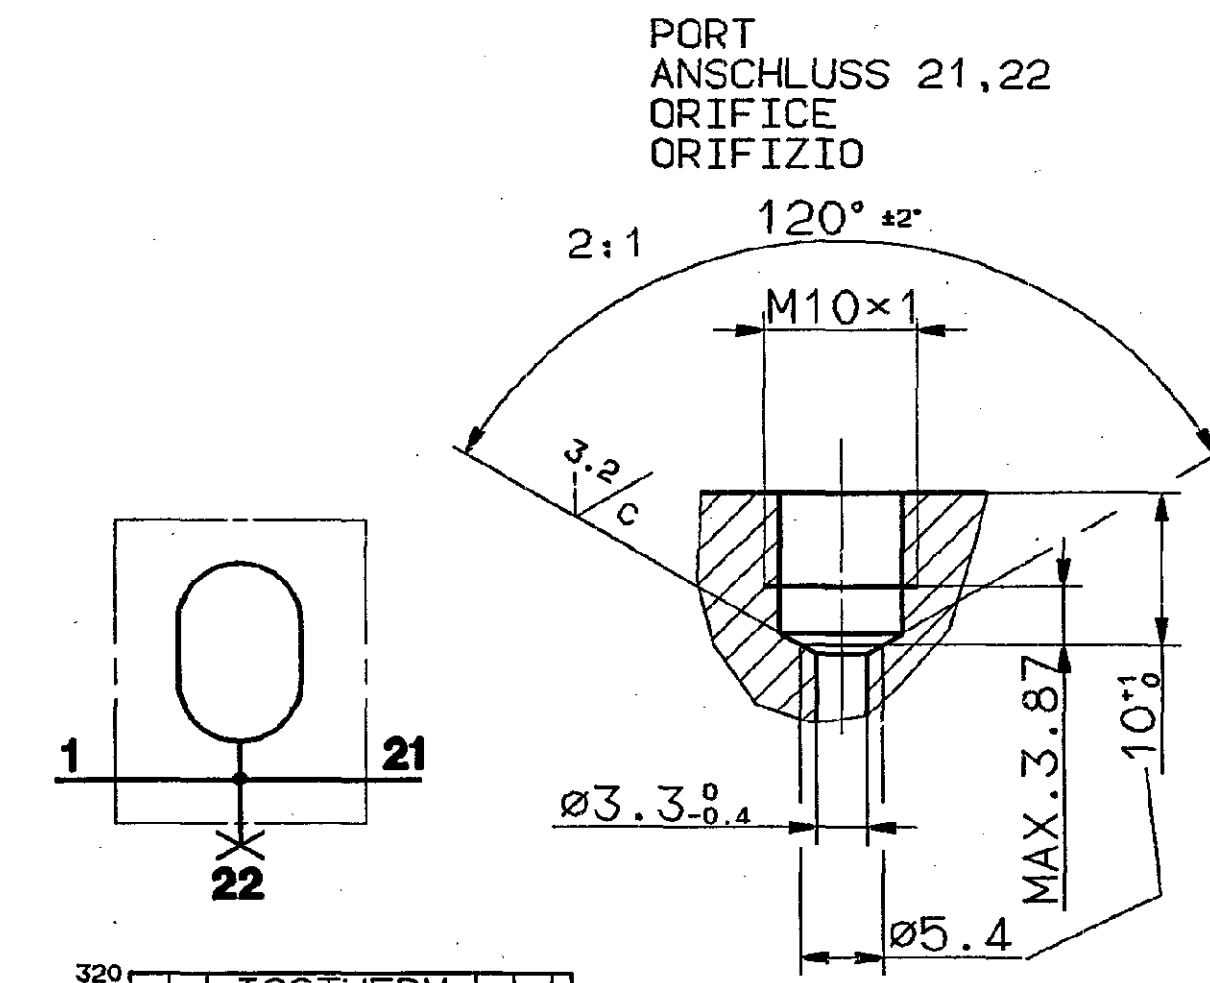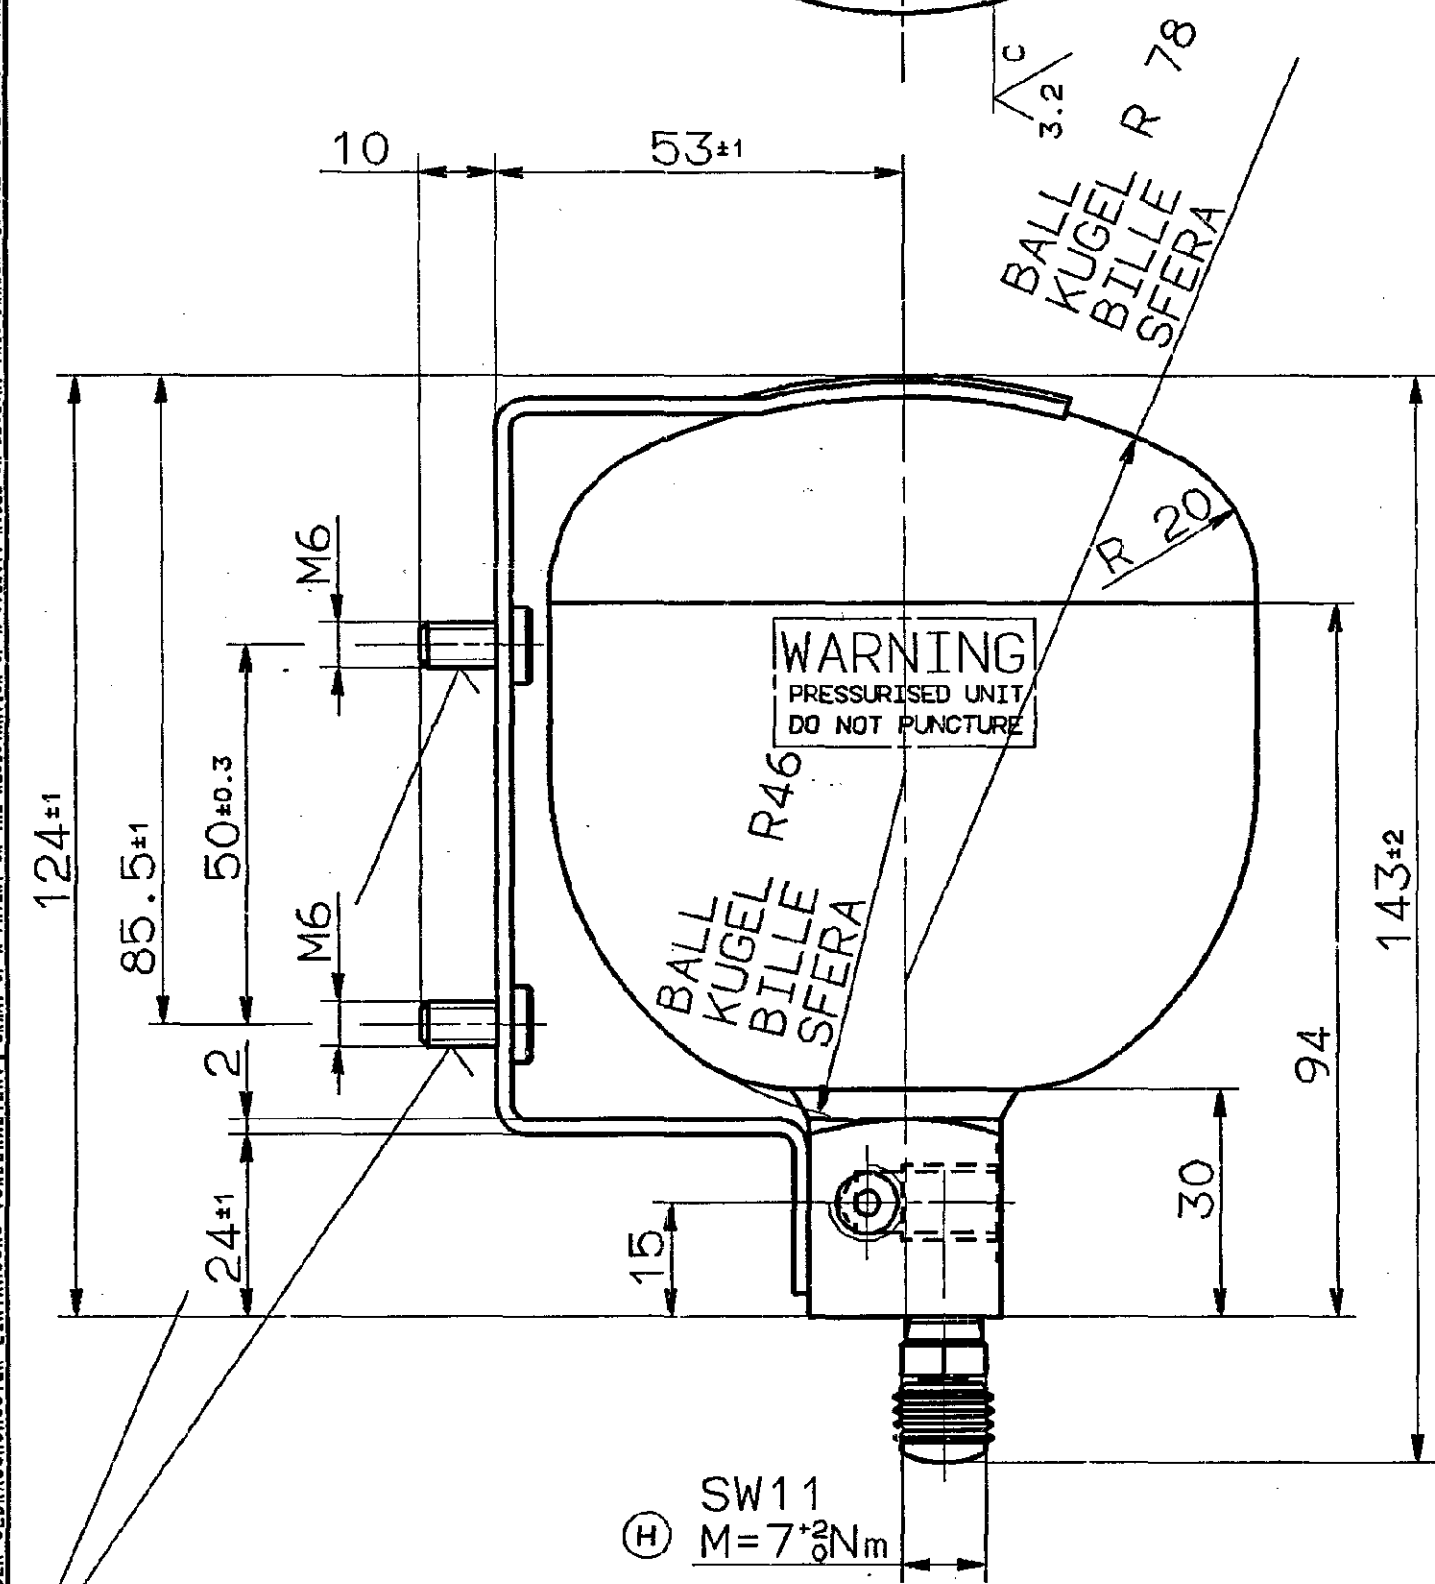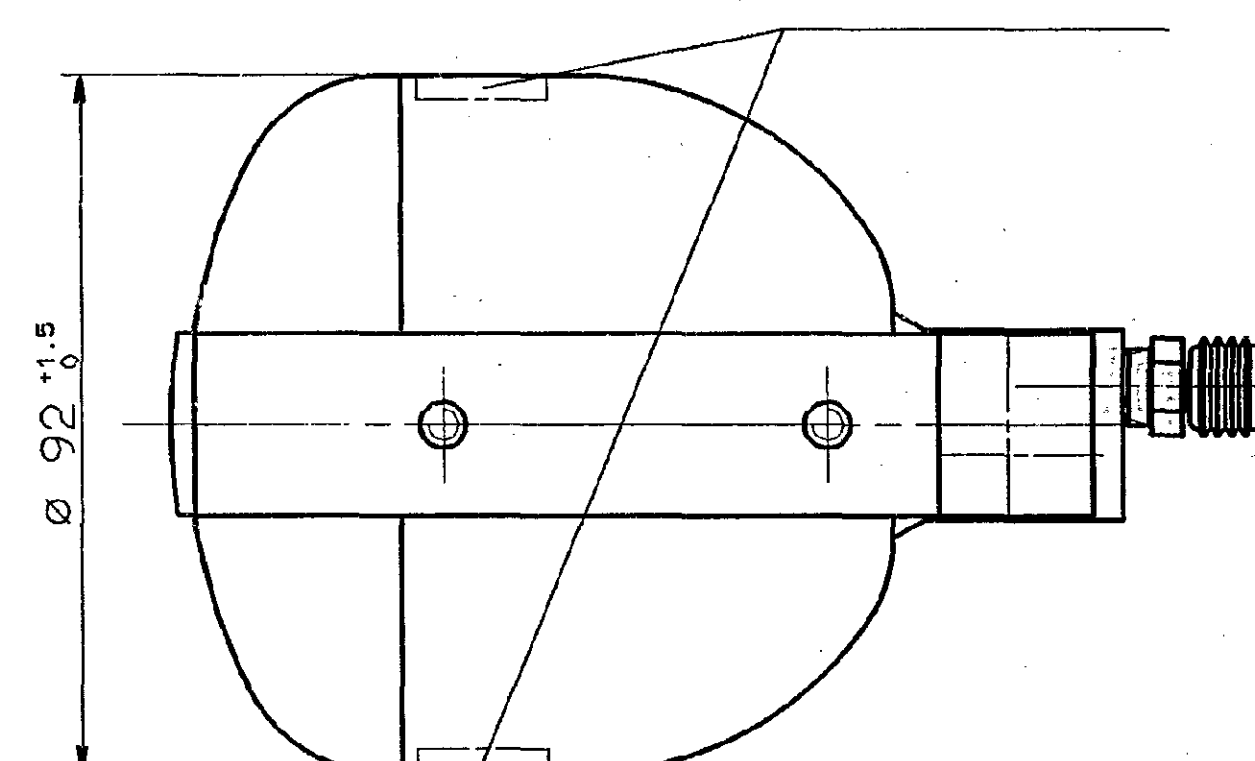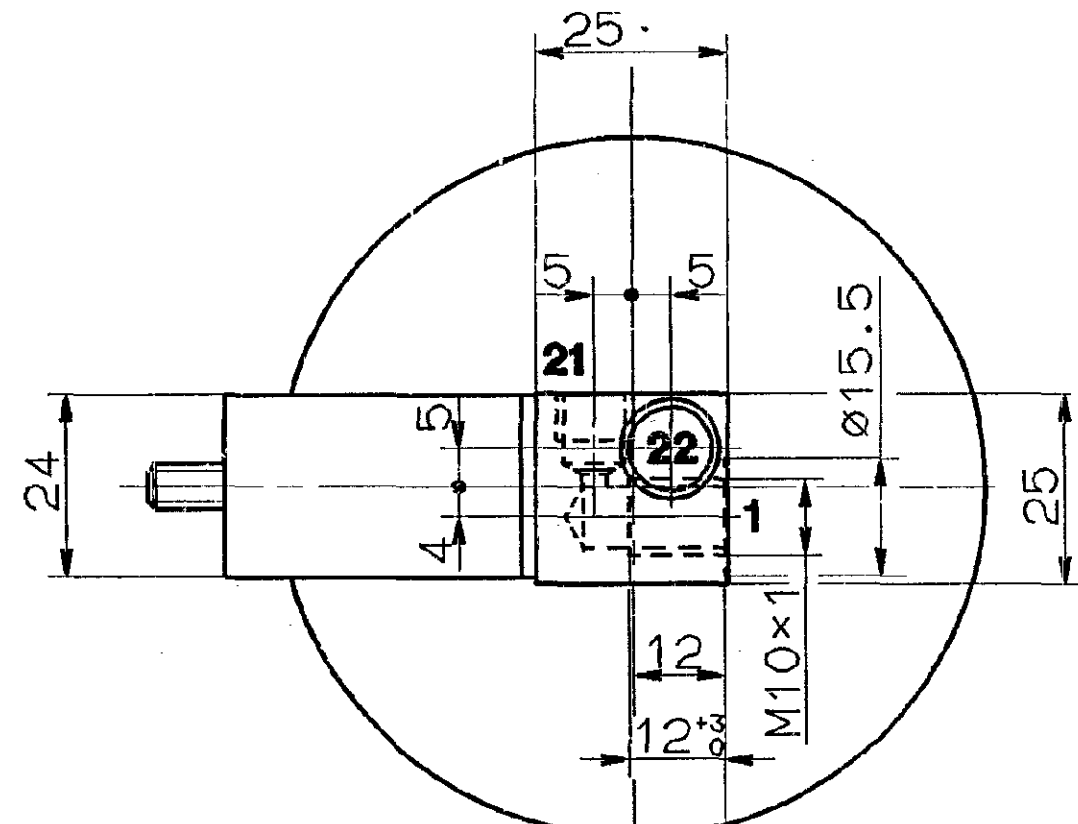

FURTHER TECHNICAL DATA SEE													COPYRIGHT		WABCO		CLAYTON DEWANDRE				
IDENTIFICATION NO.:-----													DATE		SIGNATURE						
CODE FOR DOCUMENT: 605										SHEET:---TO---											
GENERAL TOLERANCES										040162	2×H	89-06-21	86-07-03	DRAWN	WARNECKE		ACCUMULATOR DRUCKSPEICHER ACCUMULATEUR ACCUMULATEORE				
CLASS										RANGE OF NOMINAL DIMENSIONS (± mm)			040138	1×G	89-03-02	86-07-03			CHECKED	AL.	
													040107	2×F	89-01-12	86-07-03			STANDARDIZATION		
													038074	2×E	88-07-25	86-07-03			PANTZER		
1) ≤50										> 50	>180	>400	038063	12×D	88-05-19	MASS	SCALE	PRODUCT IDENTIFICATION NO.			
I										0,5	1,0	1,5	2,0	038061	13×C	88-05-06	1.3 kg	1:1	CODE FOR DOCUMENT		
II										1,0	2,0	3,0	4,0	035679	2×B	86-11-12	SIZE	T.R.I.	SHEET		
III										2,0	3,5	5,0	6,5						458 501 018 0		
TAPPED HOLES ACC. ISO 4039 / JED-152										035637	2×A	86-09-18						605			
1) TOLERANCE CLASS APPLIED CROSSMARKED										DCN-NO.	REV.	DATE	A 2	141			CODE F. PROD.-GROUP	CODE FOR SHAPE	REPLACEMENT FOR		
															680						