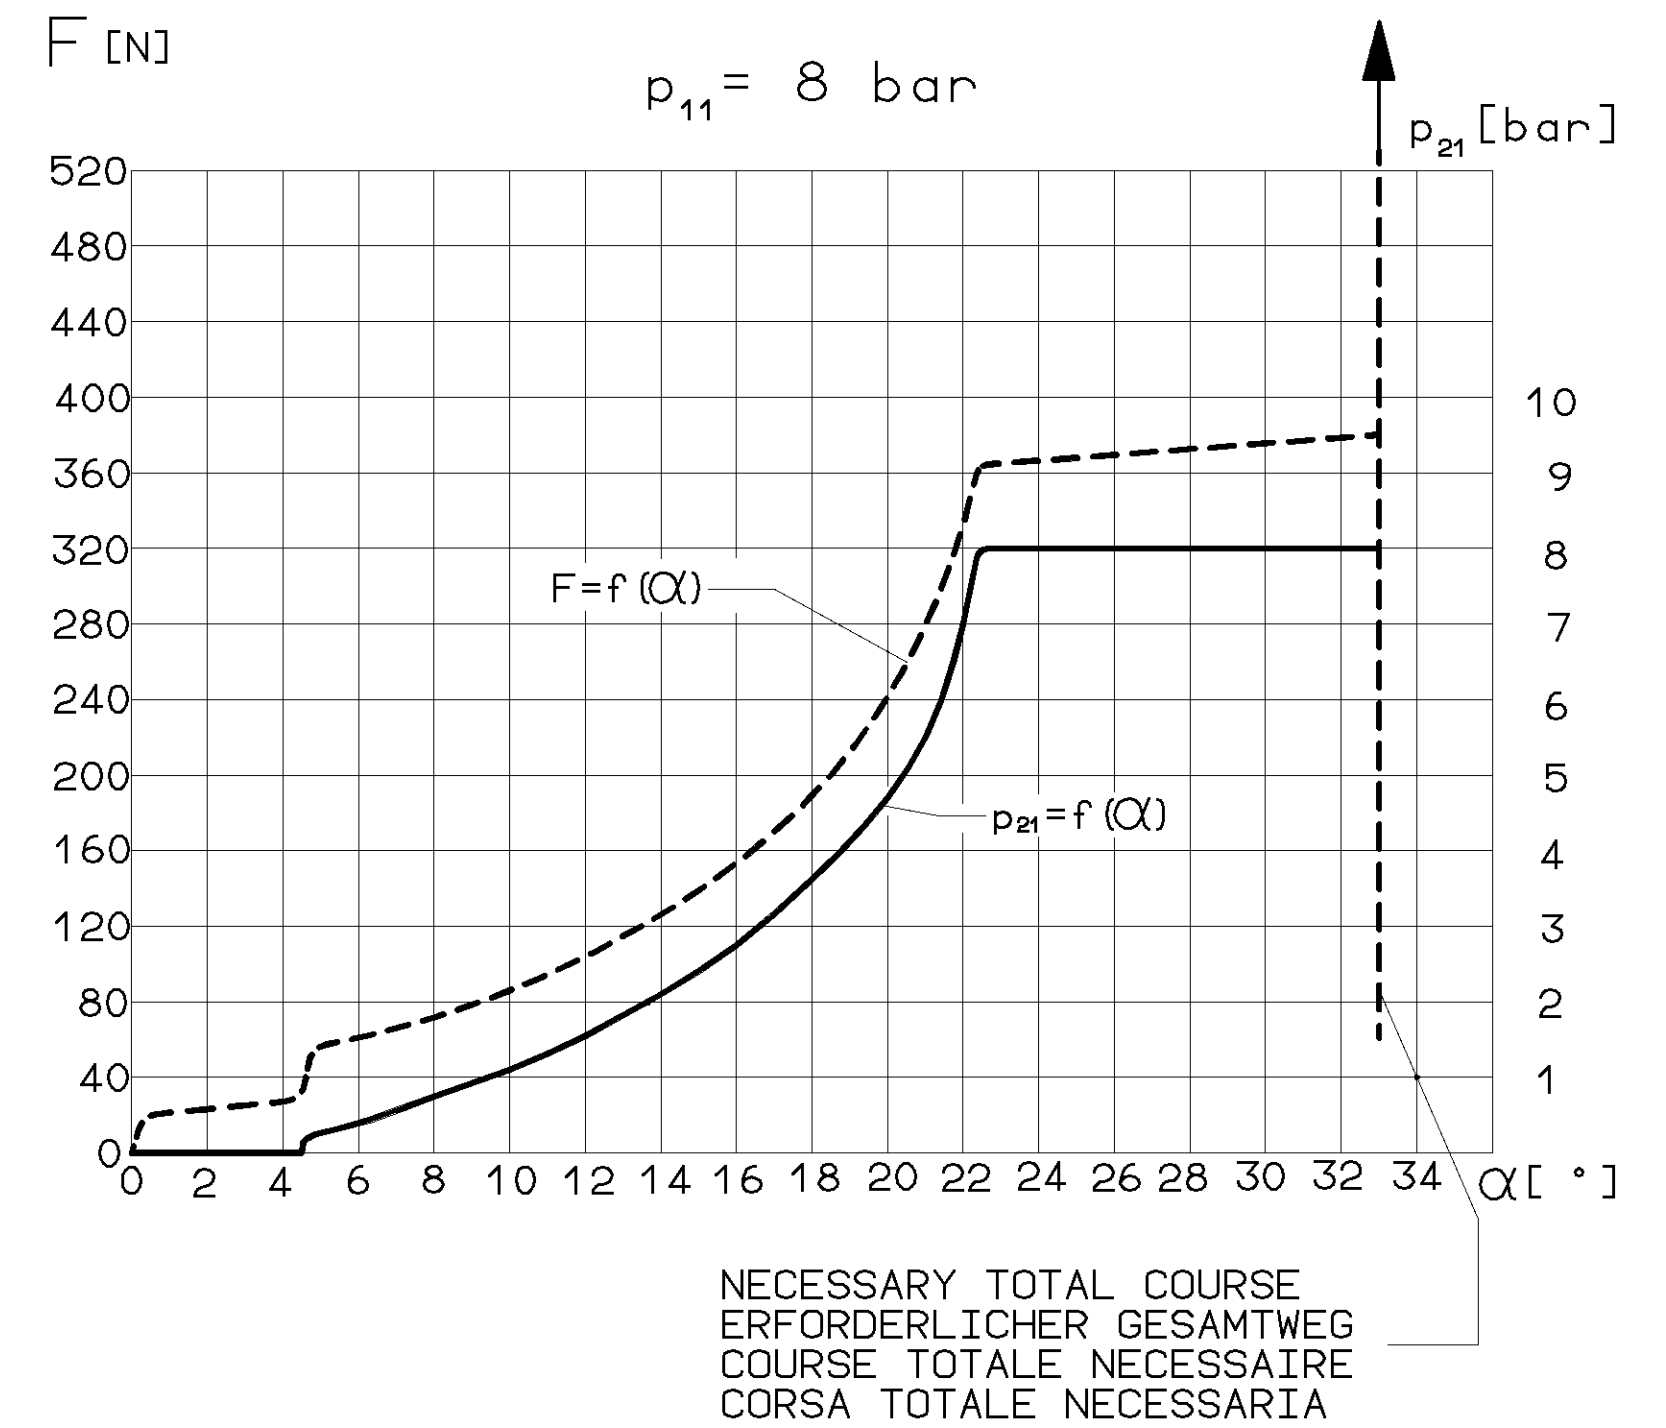
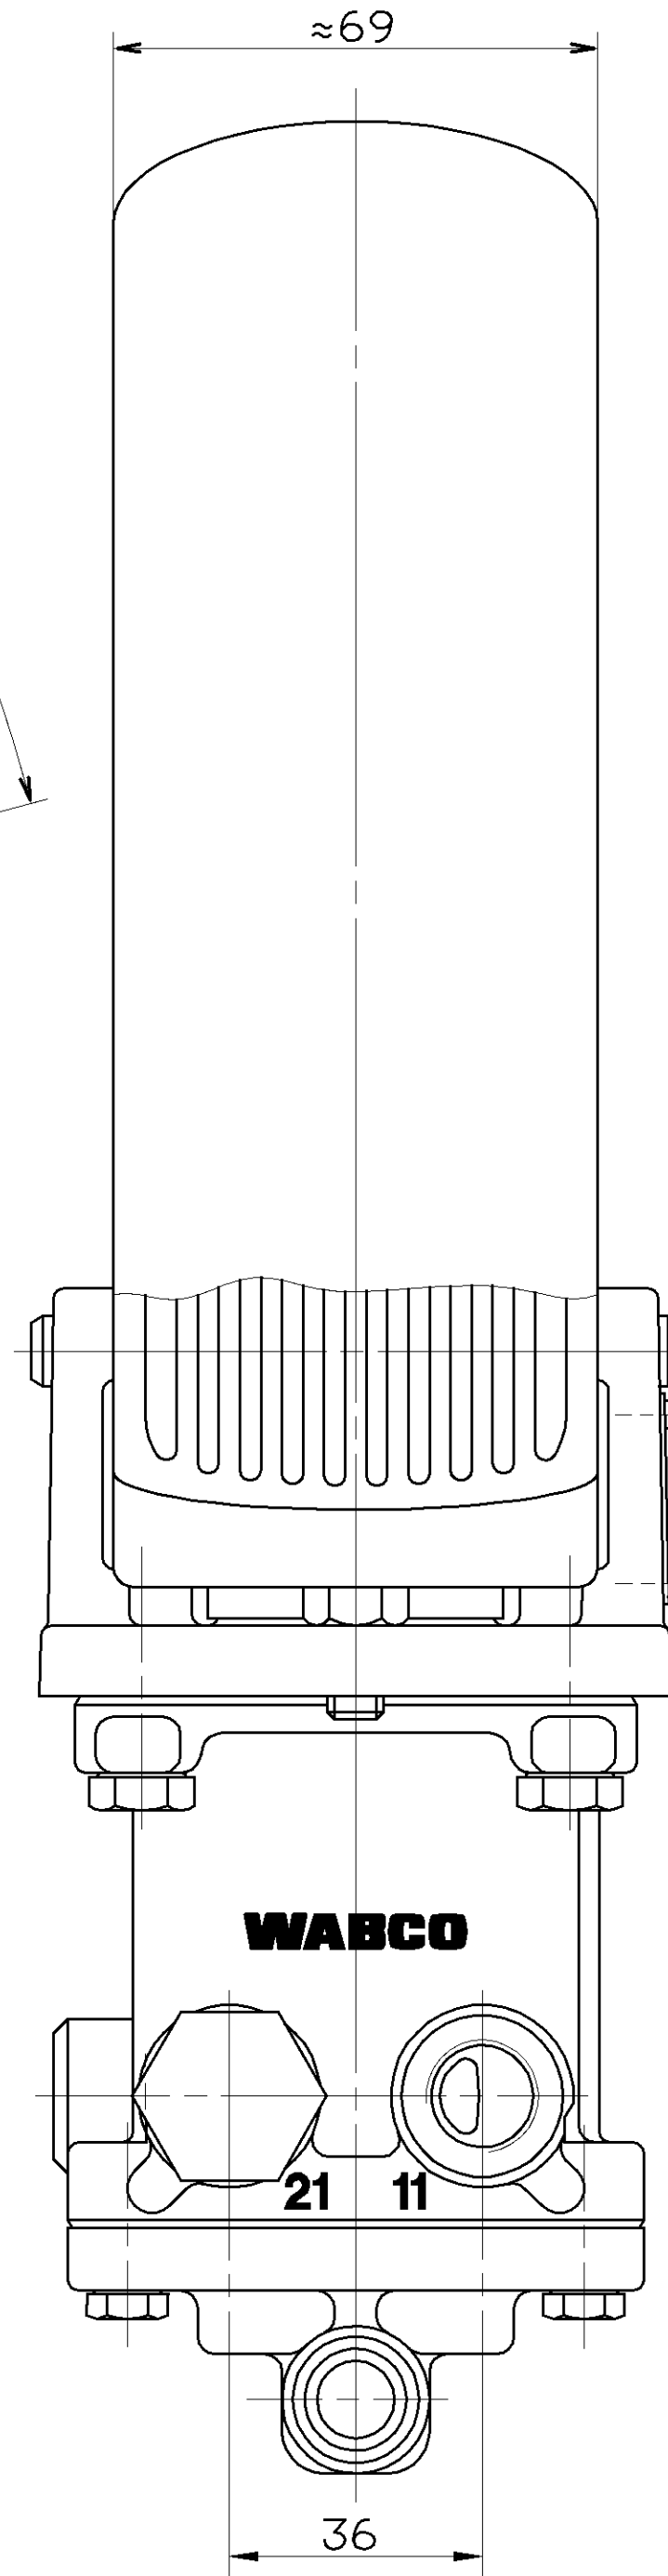
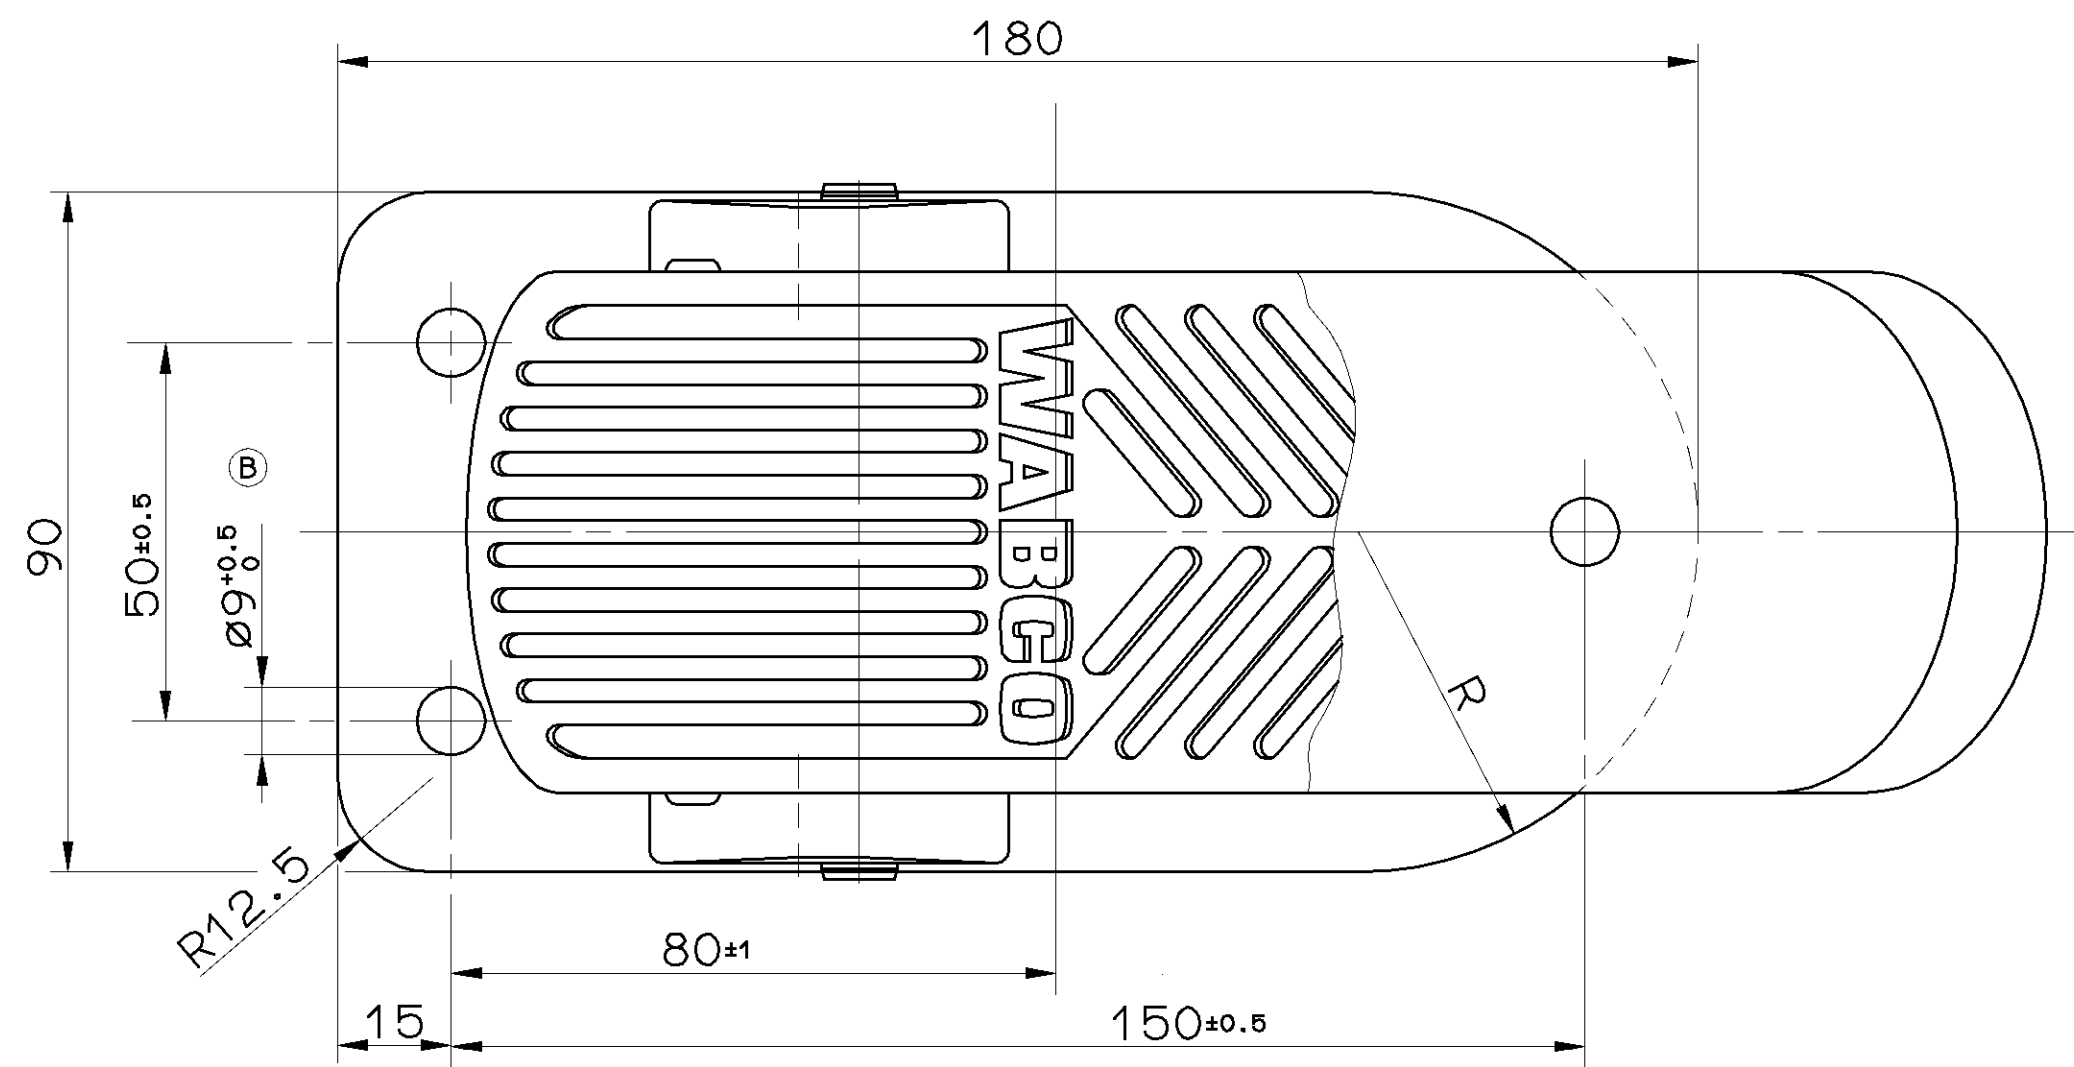
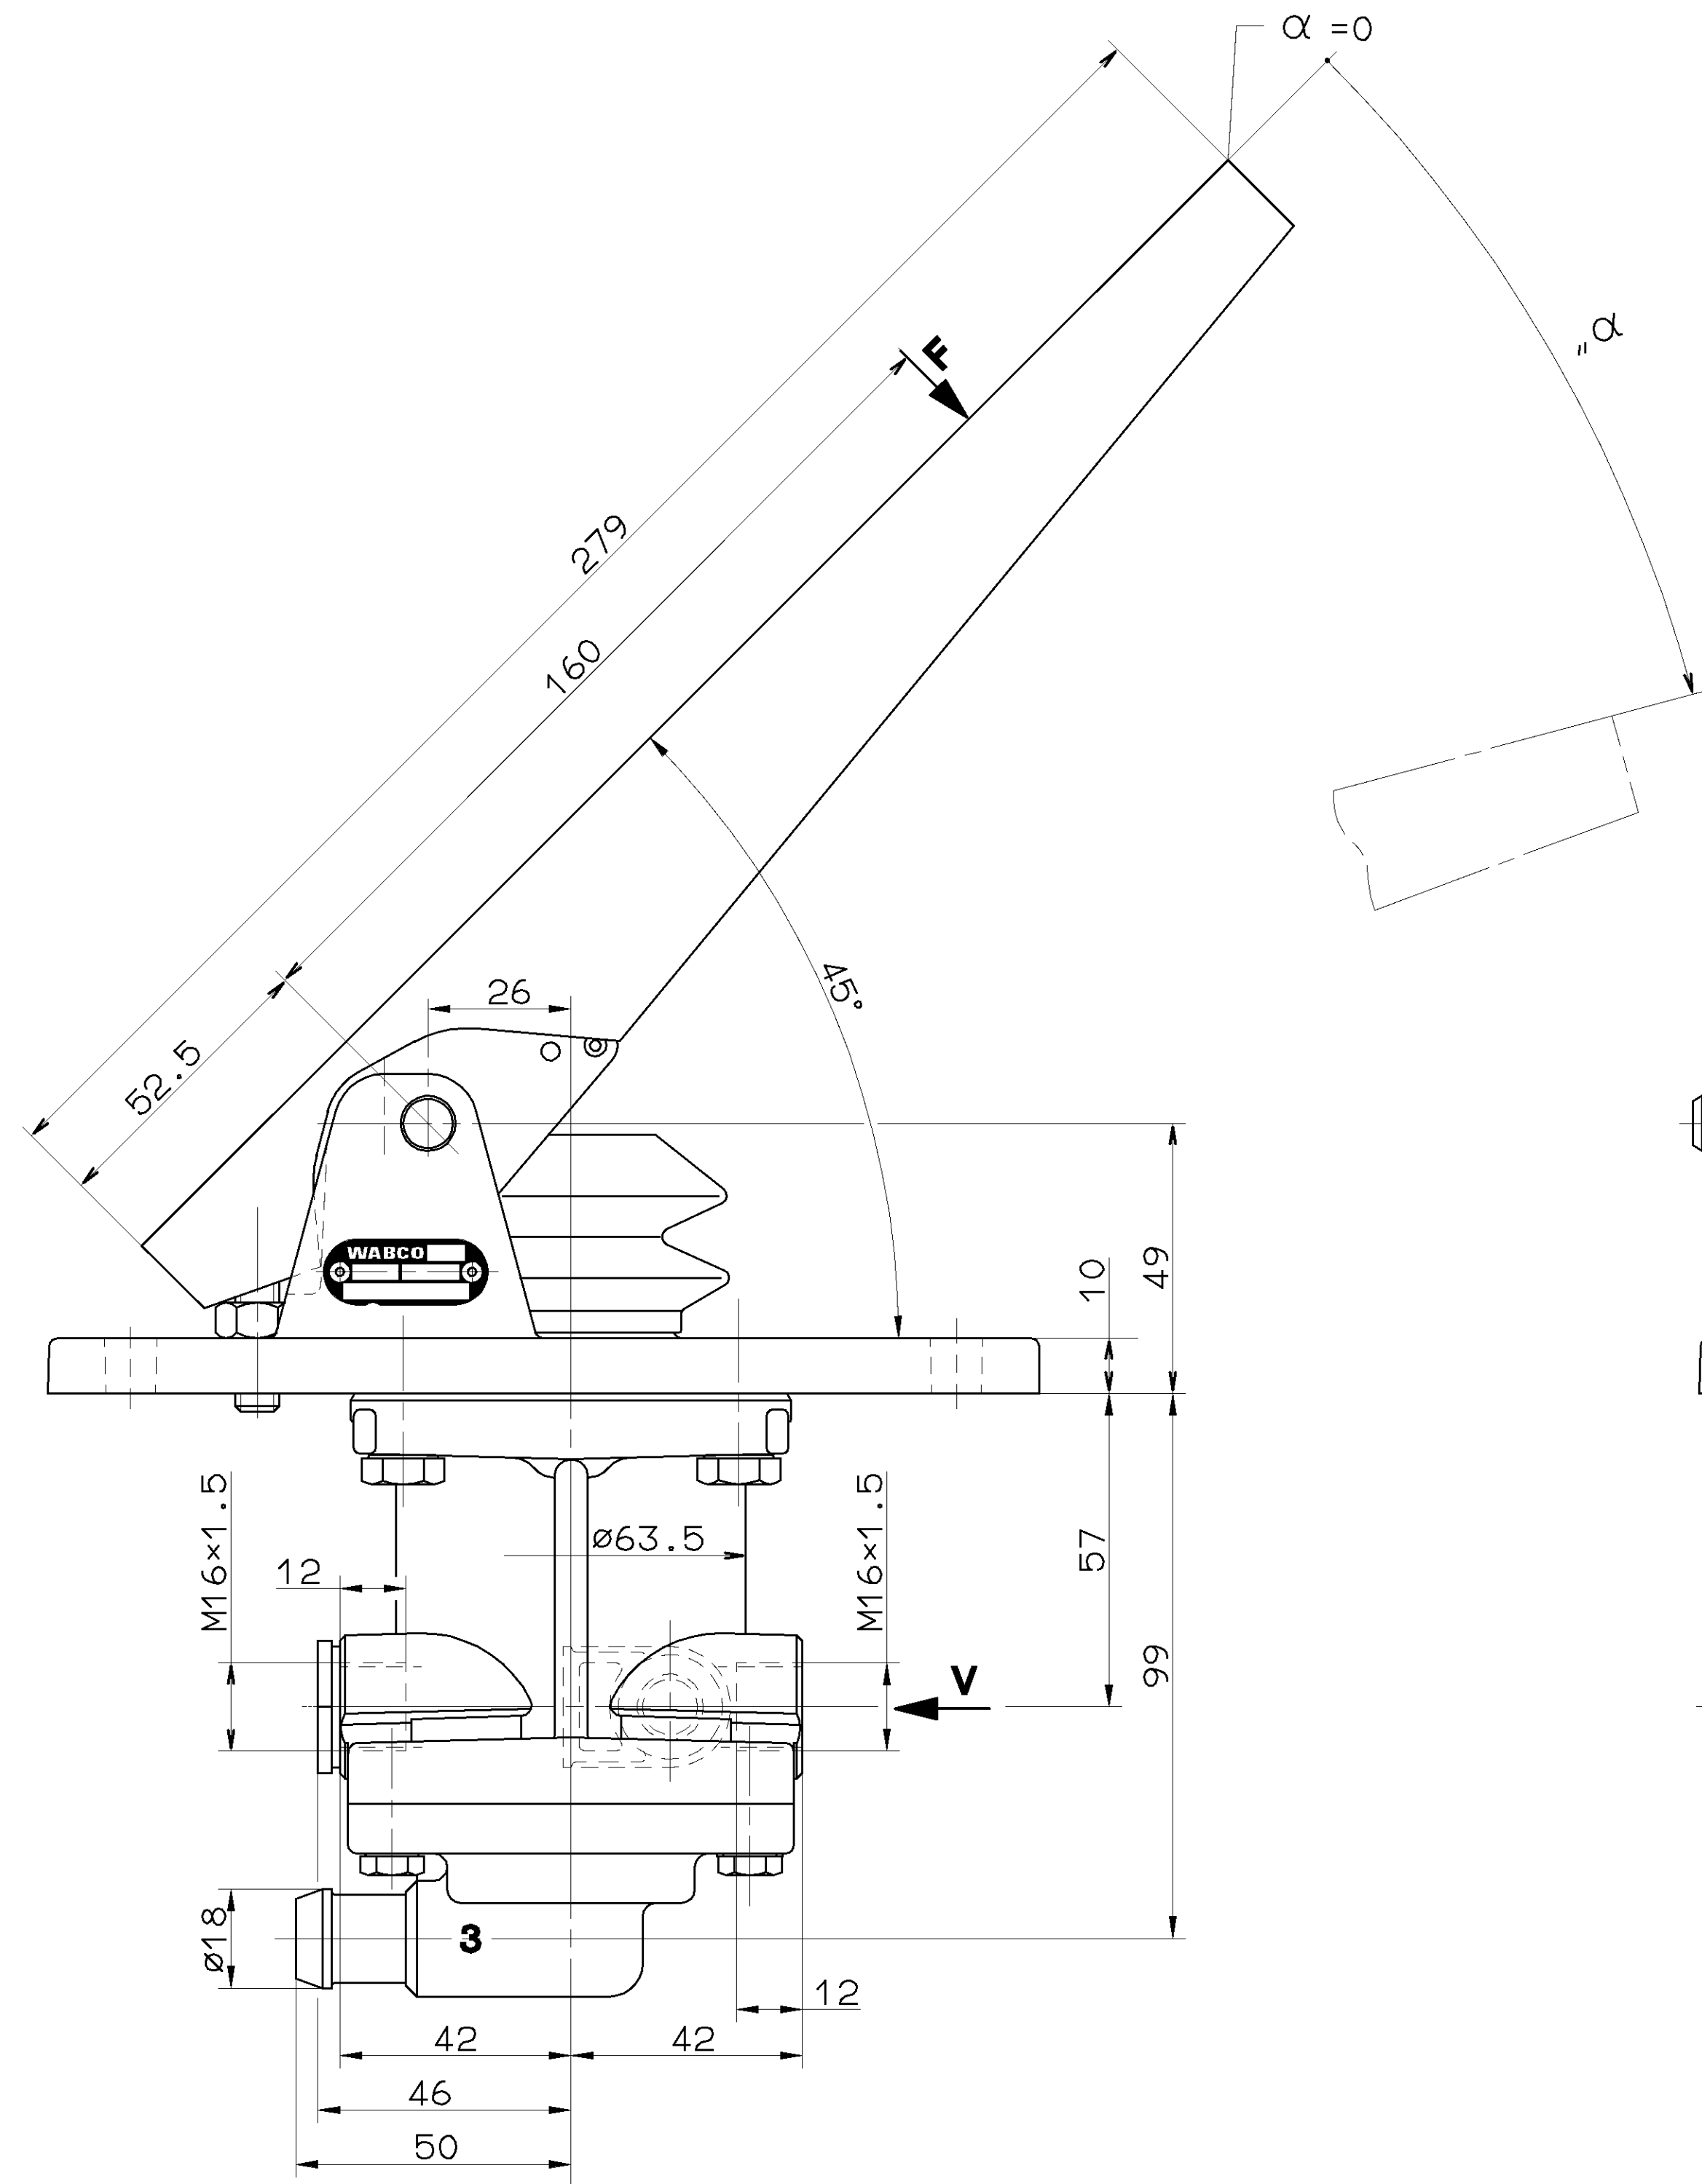
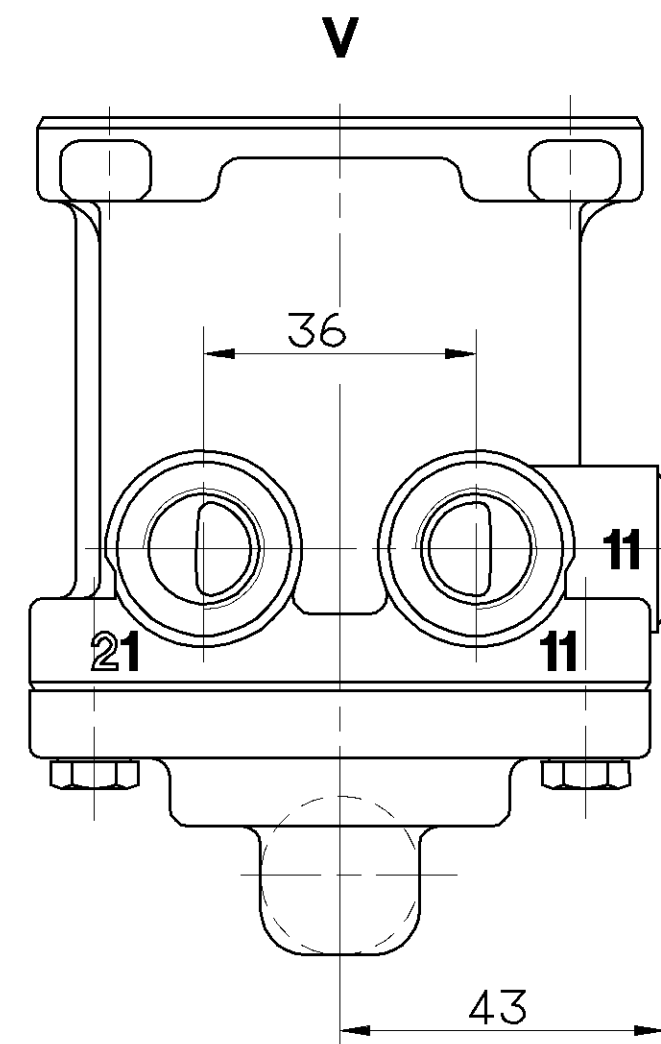


[illegible]

11 SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE

21 OUTLET
AUSGANG
SORTIE
USCITA

3 EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

NOMINAL DIAMETER :
 NENNWEITE :
 DIAMETRE NOMINAL : 78.5 mm² ≈ Ø10mm
 DIAMETRO NOMINALE :

WORKING PRESSURE :
BETRIEBSDRUCK :
PRESSION D UTILISATION : $p_e = \text{MAX.} 8.5 \text{ bar}$
PRESSIONE DI ESERCIZIO :

(TEMPORARILY :
(KURZZEITIG :
(DE COURTE DUREE : $p_e = \text{MAX.10 bar}$)
(BREVE TEMPO SOLO :

THERMAL RANGE OF APPLICATION :
 THERM. ANWENDUNGSBEREICH :
 GAMME D'APPLICATION THERMIQUE : -40° C...+80° C
 CAMPO DI APPLICAZIONE TERMICA :

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG
POSITION D'INSTALLATION: INDIFFERENT
POSIZIONE DI MONTAGGIO : INDIFFERENTE

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS: M16x1.5: M=MAX. 34 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

GENERAL SPECIFICATION:		JED-334		CADAUN DRAWING: CADAUN		WABCO BRAKE VALVE MOTORWAGEN-BREMSVENTIL ROBINET DE FREINAGE DISTRIBUTORE DI COMANDO	
FURTHER TECHNICAL DATA:				DATE: SIGNATURE:			
DOC. CODE:				SHEET: TO			
GENERAL TOLERANCES				DRAWN: 98-11-30 M.SGF			
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)		CHECKED: 98-11-30 MARTINI			
		≤50	>50 ≤180	>180 ≤400	>400	STANDARDIZATION:	
FINE		0,5	1,0	1,5	2,0		
MEDIUM		1,0	2,0	3,0	4,0		
COARSE		2,0	3,5	5,0	6,5		
						± 3°	
TAPPED HOLES ACC. ISO 4039 / JED-182				069707		2×B 98-11-30	
1) TOLERANCE CLASS APPLIED CROSSMARKED				DOY-NO. REV. DATE			
9				100mm			
						EXPERT CODE 736	
						PRODUCT TYPE 00X	