



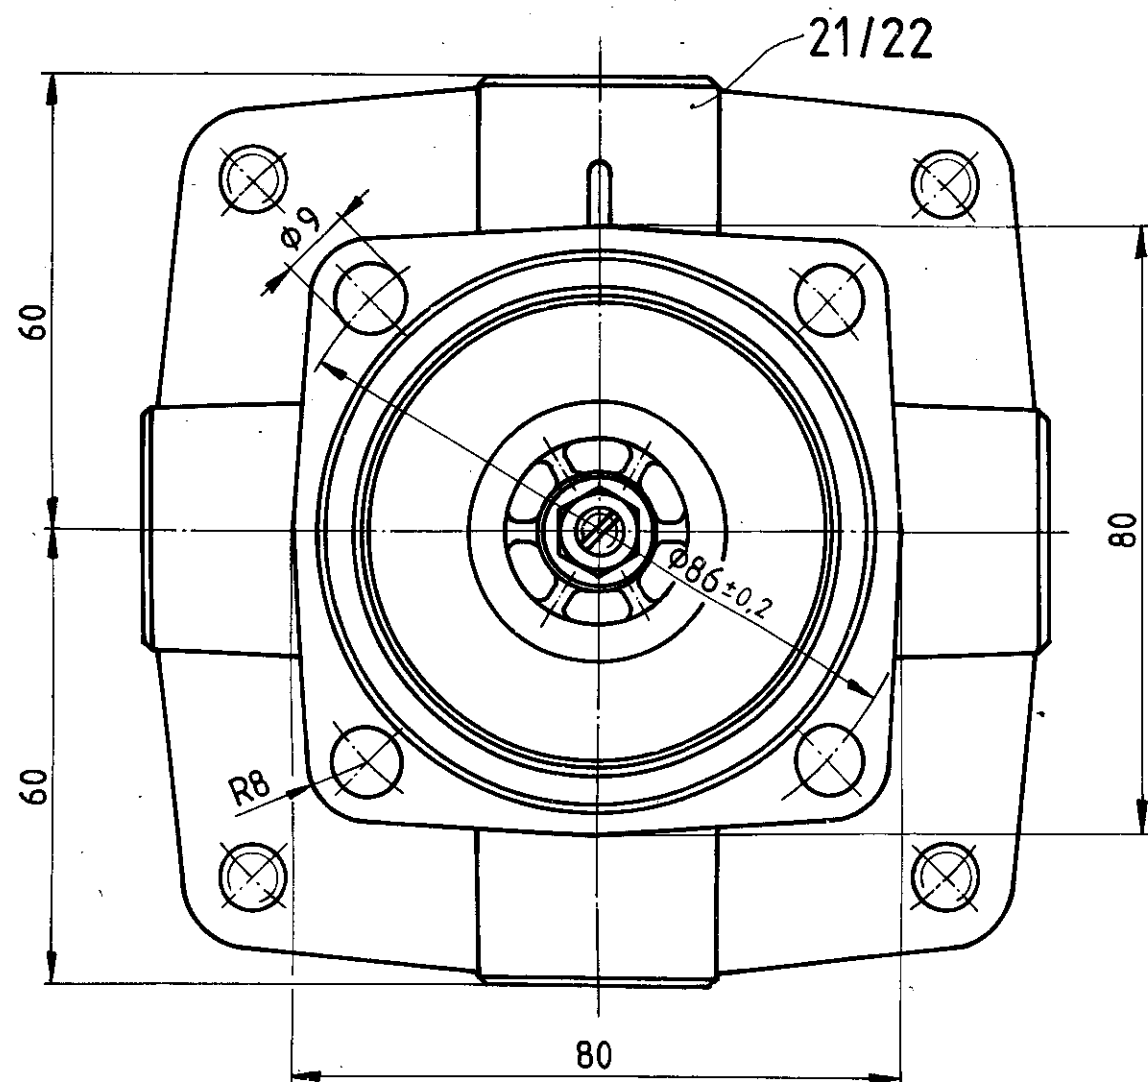

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG
POSITION D'INSTALLATION: INDIFFERENT
POSIZIONE DI MONTAGGIO : INDIFFERENTE

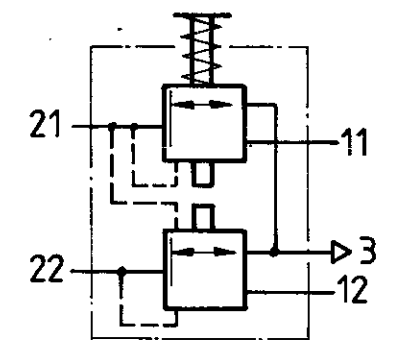

FURTHER TECHNICAL DATA SEE					L	COPYRIGHT		WABCO		CLAYTON DEWANDRE	
IDENTIFICATION No.					K	DATE		SIGNATURE		INLET-EXHAUST VALVE BE-UND ENTLUEFTUNGSVENTIL DETENDEUR VALVOLA COMPLETA	
CODE FOR DOCUMENT: 605 SHEET: TO					J	88-12-09		DRAWN <i>Posin</i>			
GENERAL TOLERANCES					H	88-12-09		CHECKED <i>A. Hoff</i>			
					G	STANDARDIZATION					
CLASS					F						
RANGE OF NOMINAL DIMENSIONS (± mm)					E						
1) <50 >50 >180 >400					D						
I 1) 0,5 1 1,5 2					C						
II X 1 2 3 4					B						
III 2 3,5 5 6,5											
TAPPED HOLES ACC. ISO 4039 / JED-152					30 607 1 x A 88-12-09						
1) TOLERANCE CLASS APPLIED CROSSMARKED					DCN-No. REV. DATE						

MASS		SCALE		PRODUCT IDENTIFICATION NO.				CODE FOR DOCUMENT		SHEET	
≈ 1,5 kg		1:1		461 307 417 0				605		1/1	
SIZE		T.R.I.				CODE F. PROD. GROUP		CODE FOR SHAPE		REPLACEMENT FOR	
A 2		140				518				461 307 417 0 / 79-04-04(A)	