

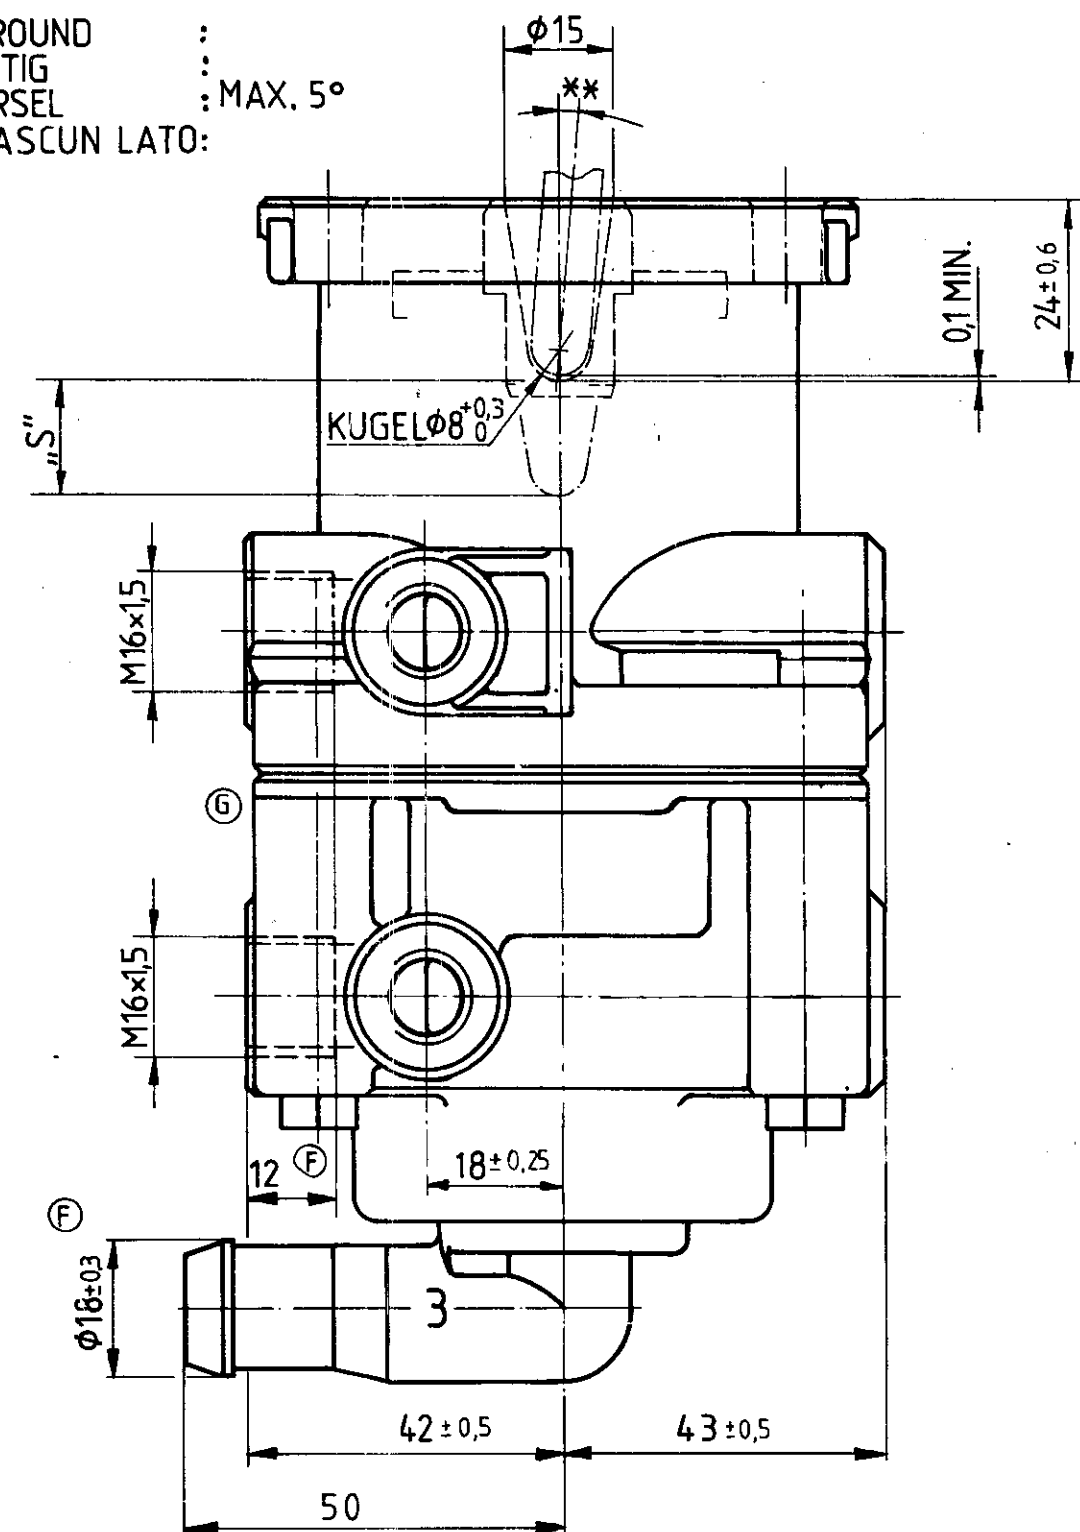


** ALL ROUND
ALLSEITIG
UNIVERSEL
SU CIASCUN LATO:

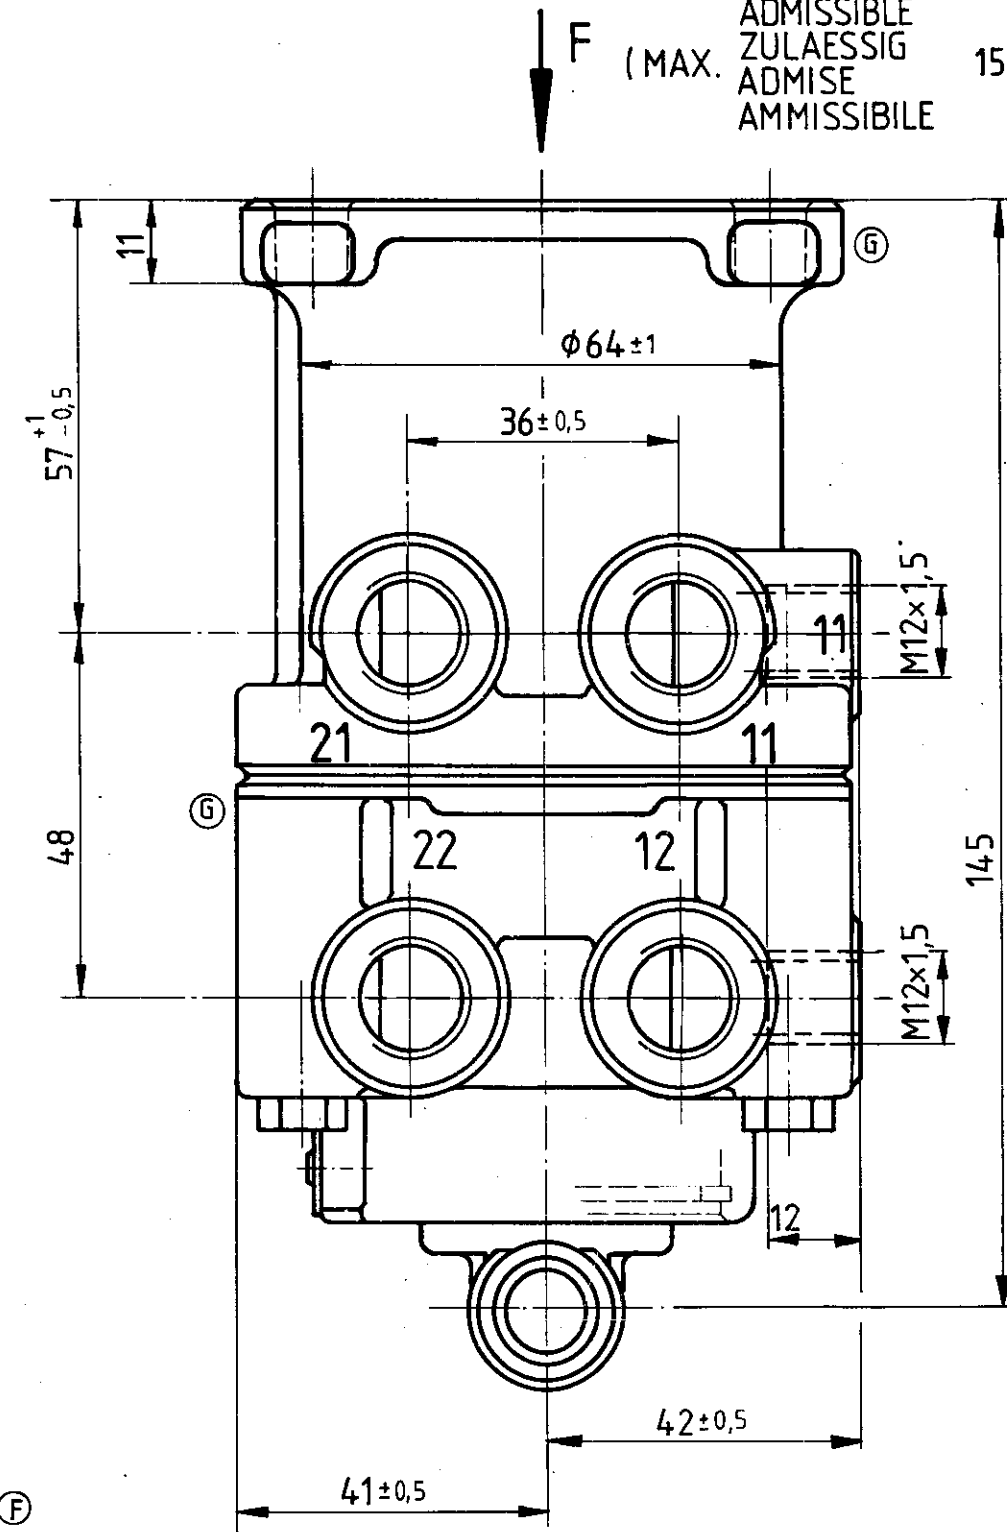

* STOP WITHIN THE DEVICE ADMISSIBLE
ANSCHLAG IM GERÄT ZULAESSIG
BUTEE DANS L'APPAREIL ADMISE
ARRESTO NEL APPARATO AMMISSIBILE

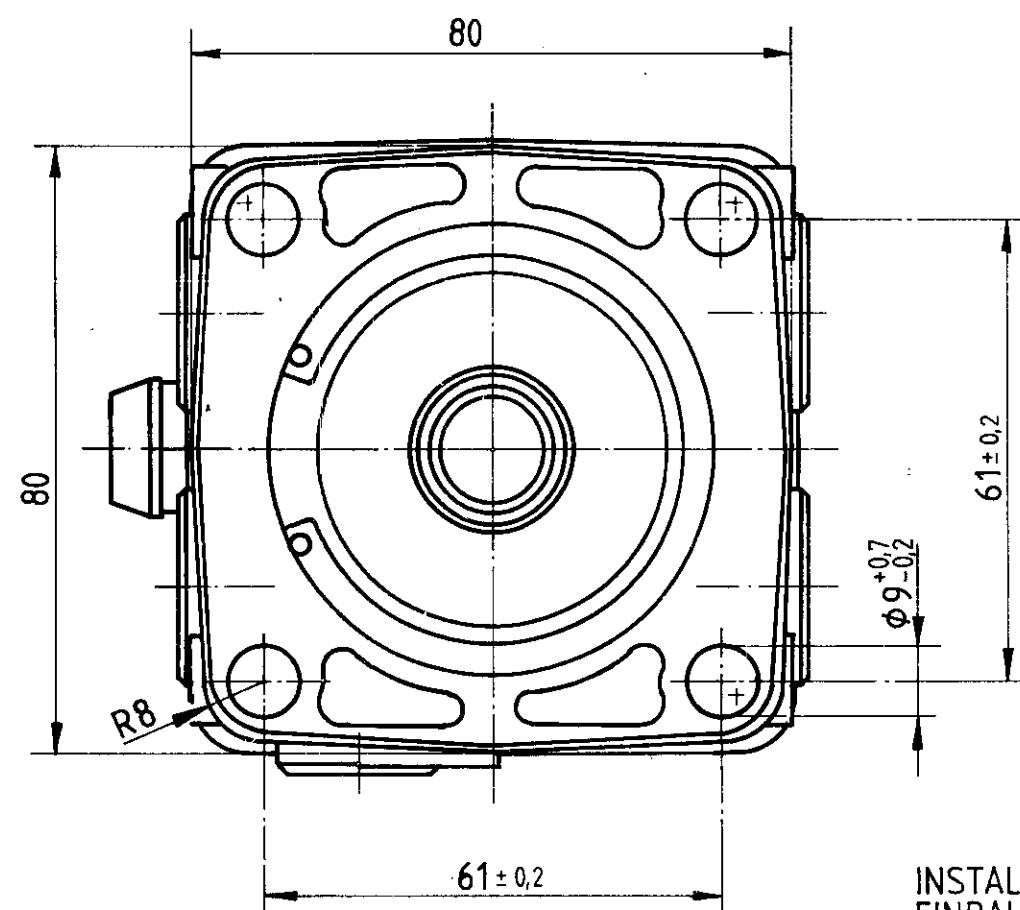

11/12: FROM RESERVOIR
VORRATSLEITUNG
DU RESERVOIR
DEL SERBATOIO

21/22: TO THE CYLINDERS
ZYLINDERLEITUNG
AUX CYLINDRES
AL CILINDRI

3: EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA



MAX. WORKING PRESSURE
MAX. BETRIEBSDRUCK
PRESSION D'UTILISATION MAXI
PRESSIONE DI ESERCIZIO MAX
pe=10 bar

NOMINAL DIAMETER
NENNWEITE
DIAMETRE NOMINAL
DIAMETRO NOMINALE
78,5 mm² ≅ Ø 10

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA
-40°C ... +80°C

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG
POSITION D'INSTALLATION : INDIFFERENT
POSIZIONE DI MONTAGGIO : INDIFFERENTE

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)					A	FORCE, POWER, PRESSURE ETC		
	0	≤ 50	≤ 100	≤ 180	≤ 400		0	1	2
I		0.5	1	1.5	2			5	
II	X	1	2	3	4	3		10	
III		2	3.5	5	6.5			20	

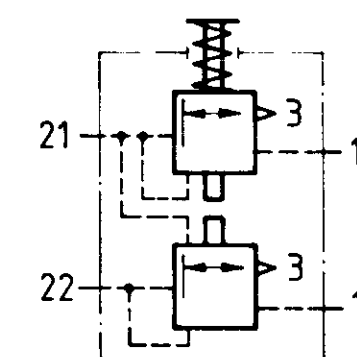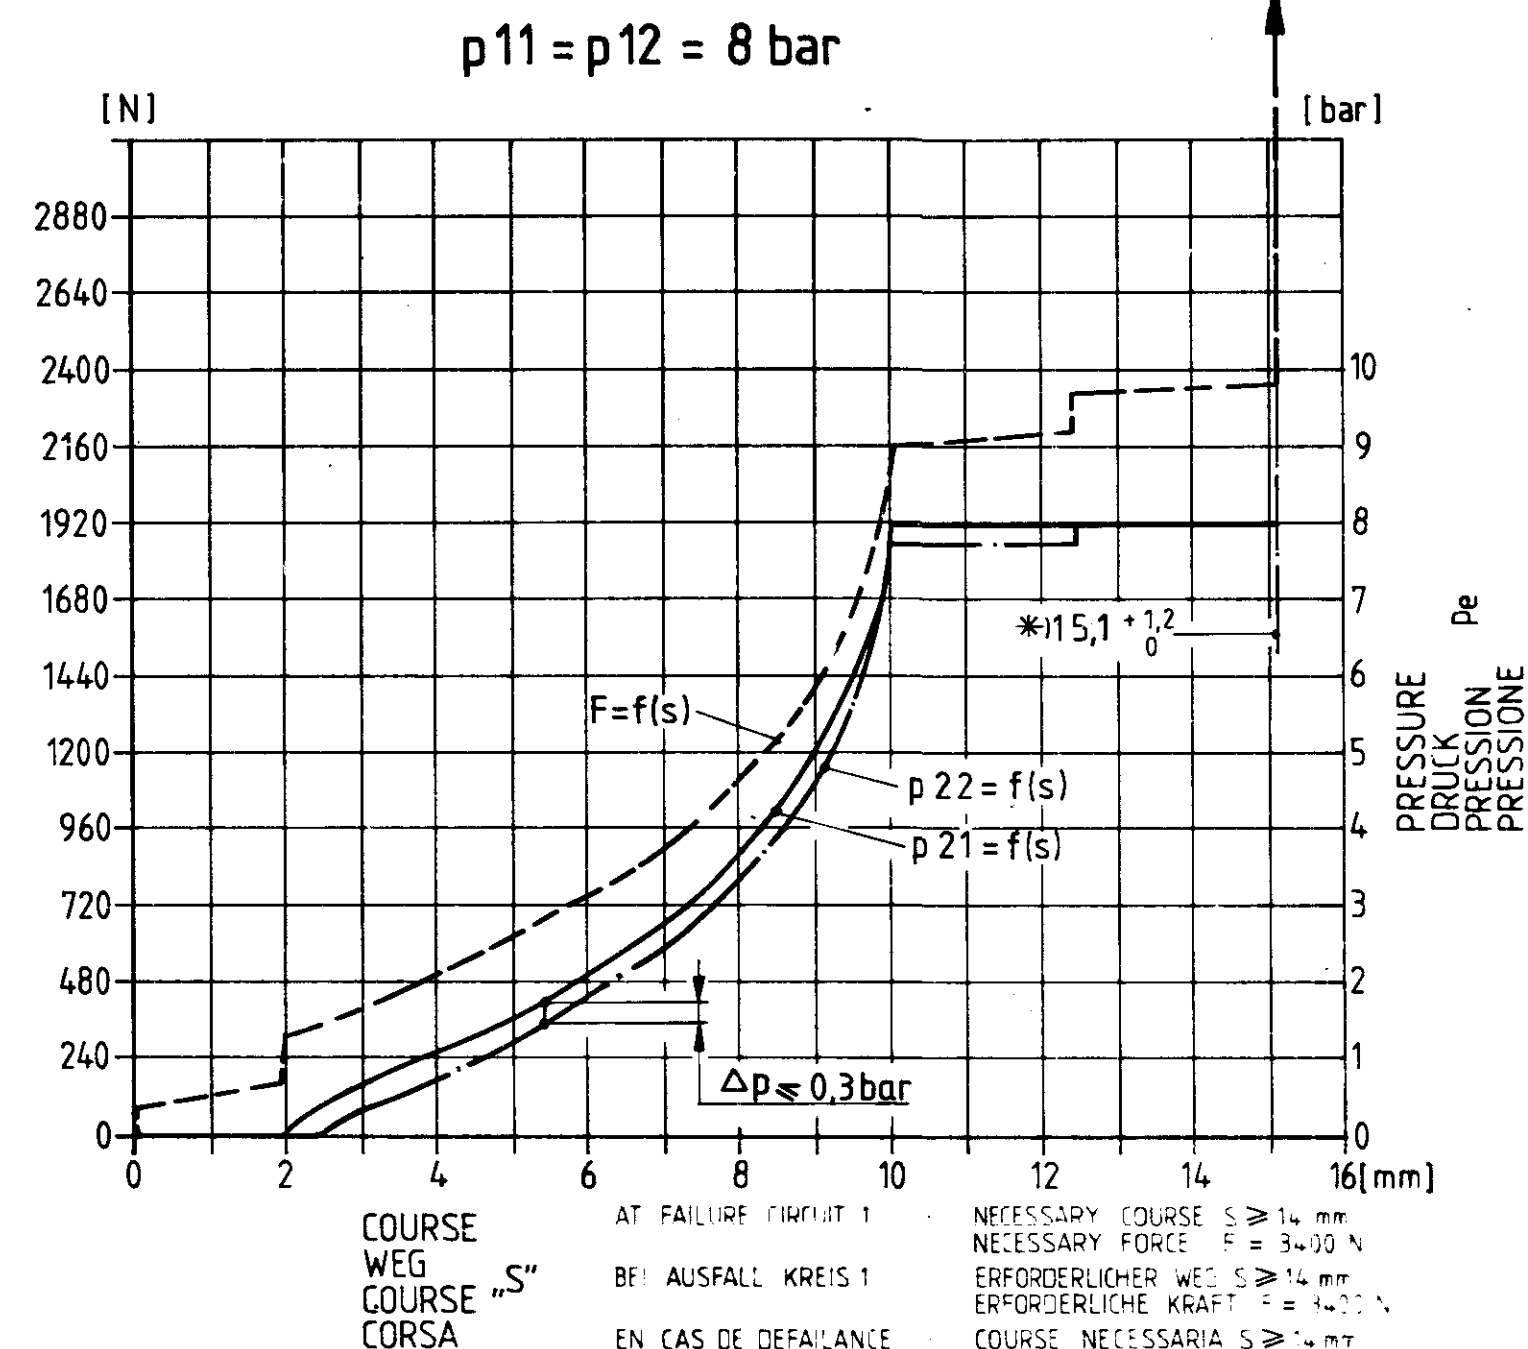

32865 3x (G) 86-05-20		DATE		SIGNATURE		WABCO	
25283 3 (F) 83-09-30		81-01-16		Meinking		DUAL BRAKE VALVE	
24039 1x (E) 81-01-16		81-01-19		Gaar		ROBINET DE FREINAGE DOUBLE	
		81-01-19		STANDARDIZATION		DISTRIBUTORE DI COMANDO DOPPIO	
						MOTWGN - BREMSVENTIL, ZWEIKR	
MASS		SCALE		IDENTIFICATION			
1,300		1:1		461 315 004 0		SHEET	
SIZE		T.M.		CODE FOR FUNCTION		CODE FOR SHAPE	
A2		140				CODE FOR DOCUMENT	
TAPPED HOLES ACC. ISO 4039		461 315 004 0 OF 1		78-06-07		605	
TOLERANCE CLASS APPLIED CROSSMARKED							