
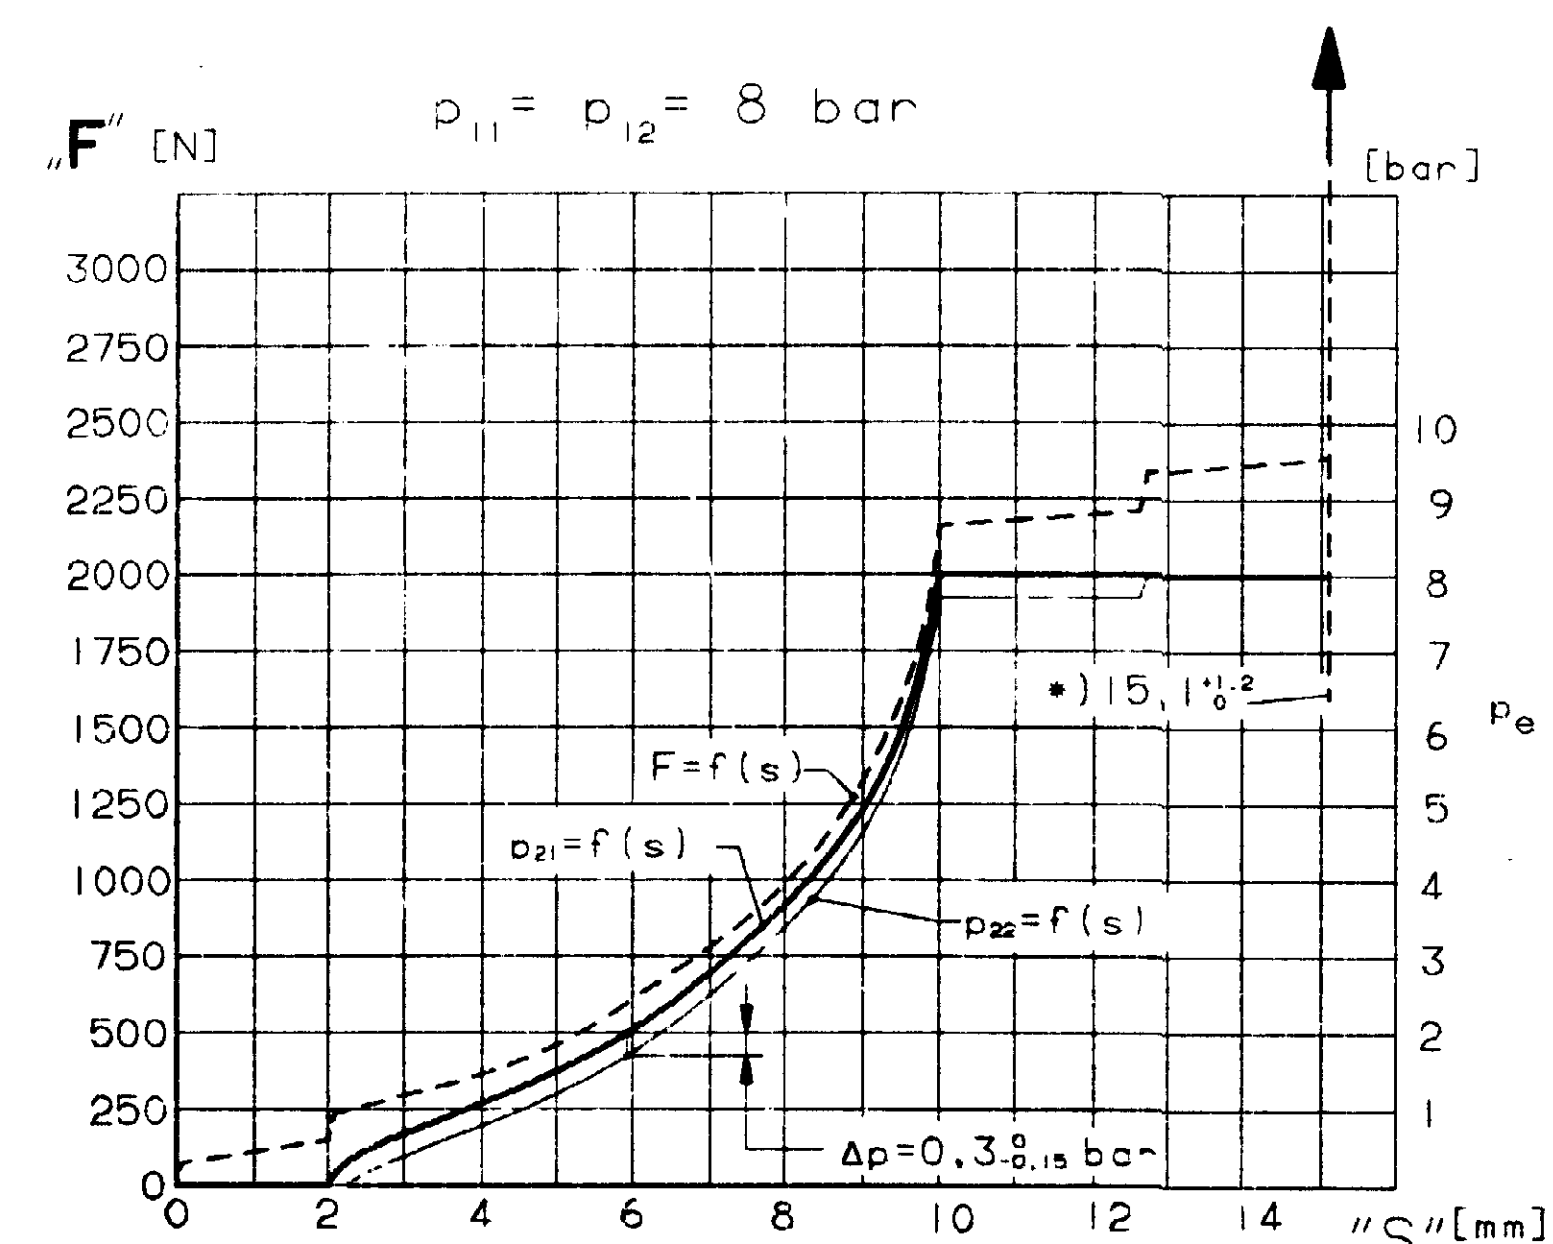
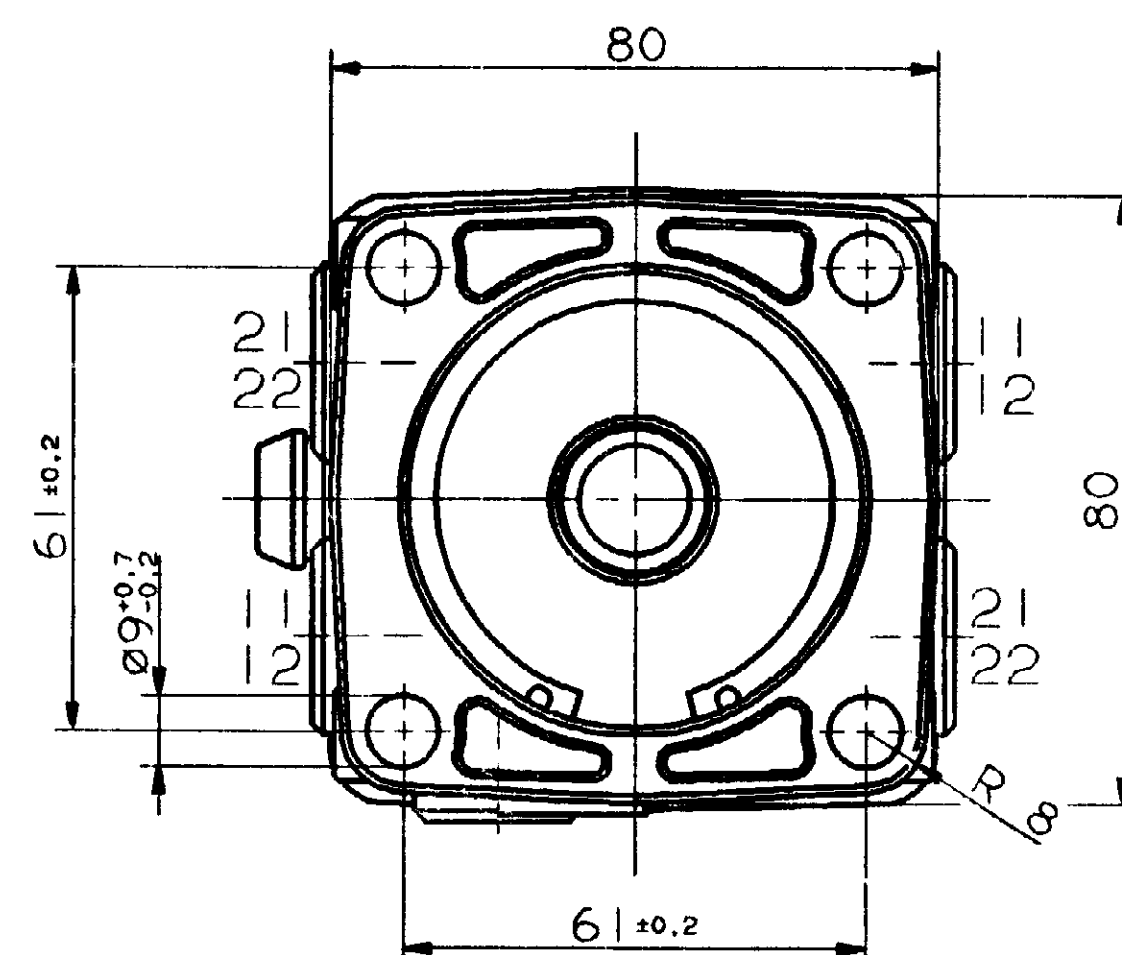
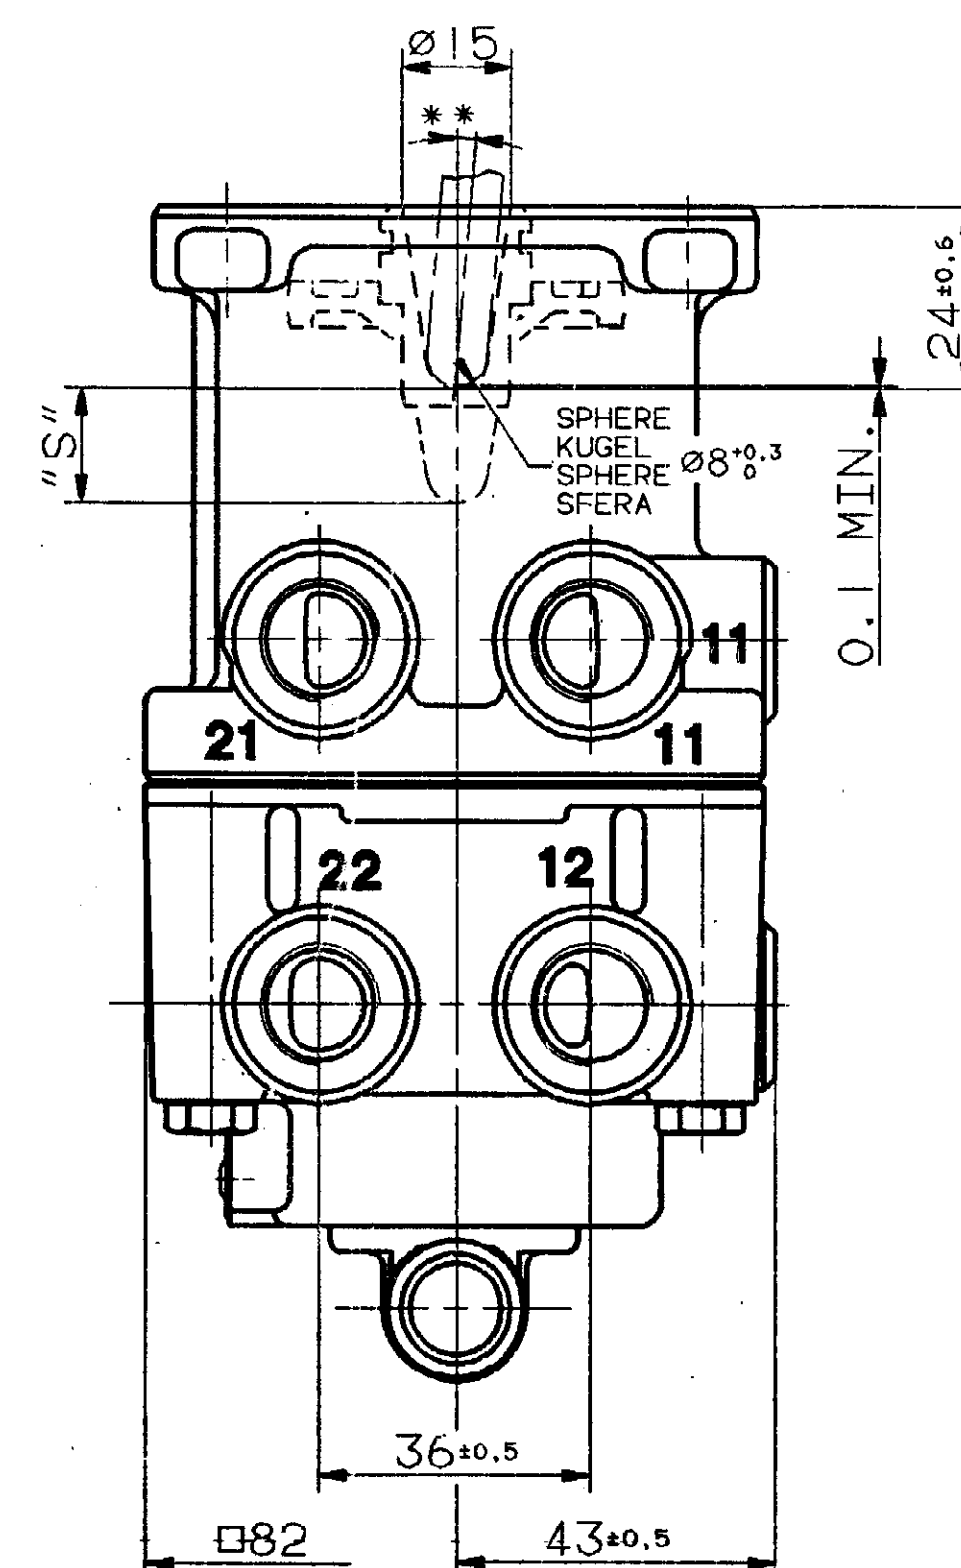


F (MAX. ZULAESSIG 15000 N)
ADMISE
AMMISSIBILE

ALLSEITIG MAX. 5°
UNIVERSAL
SUL CASCINATO

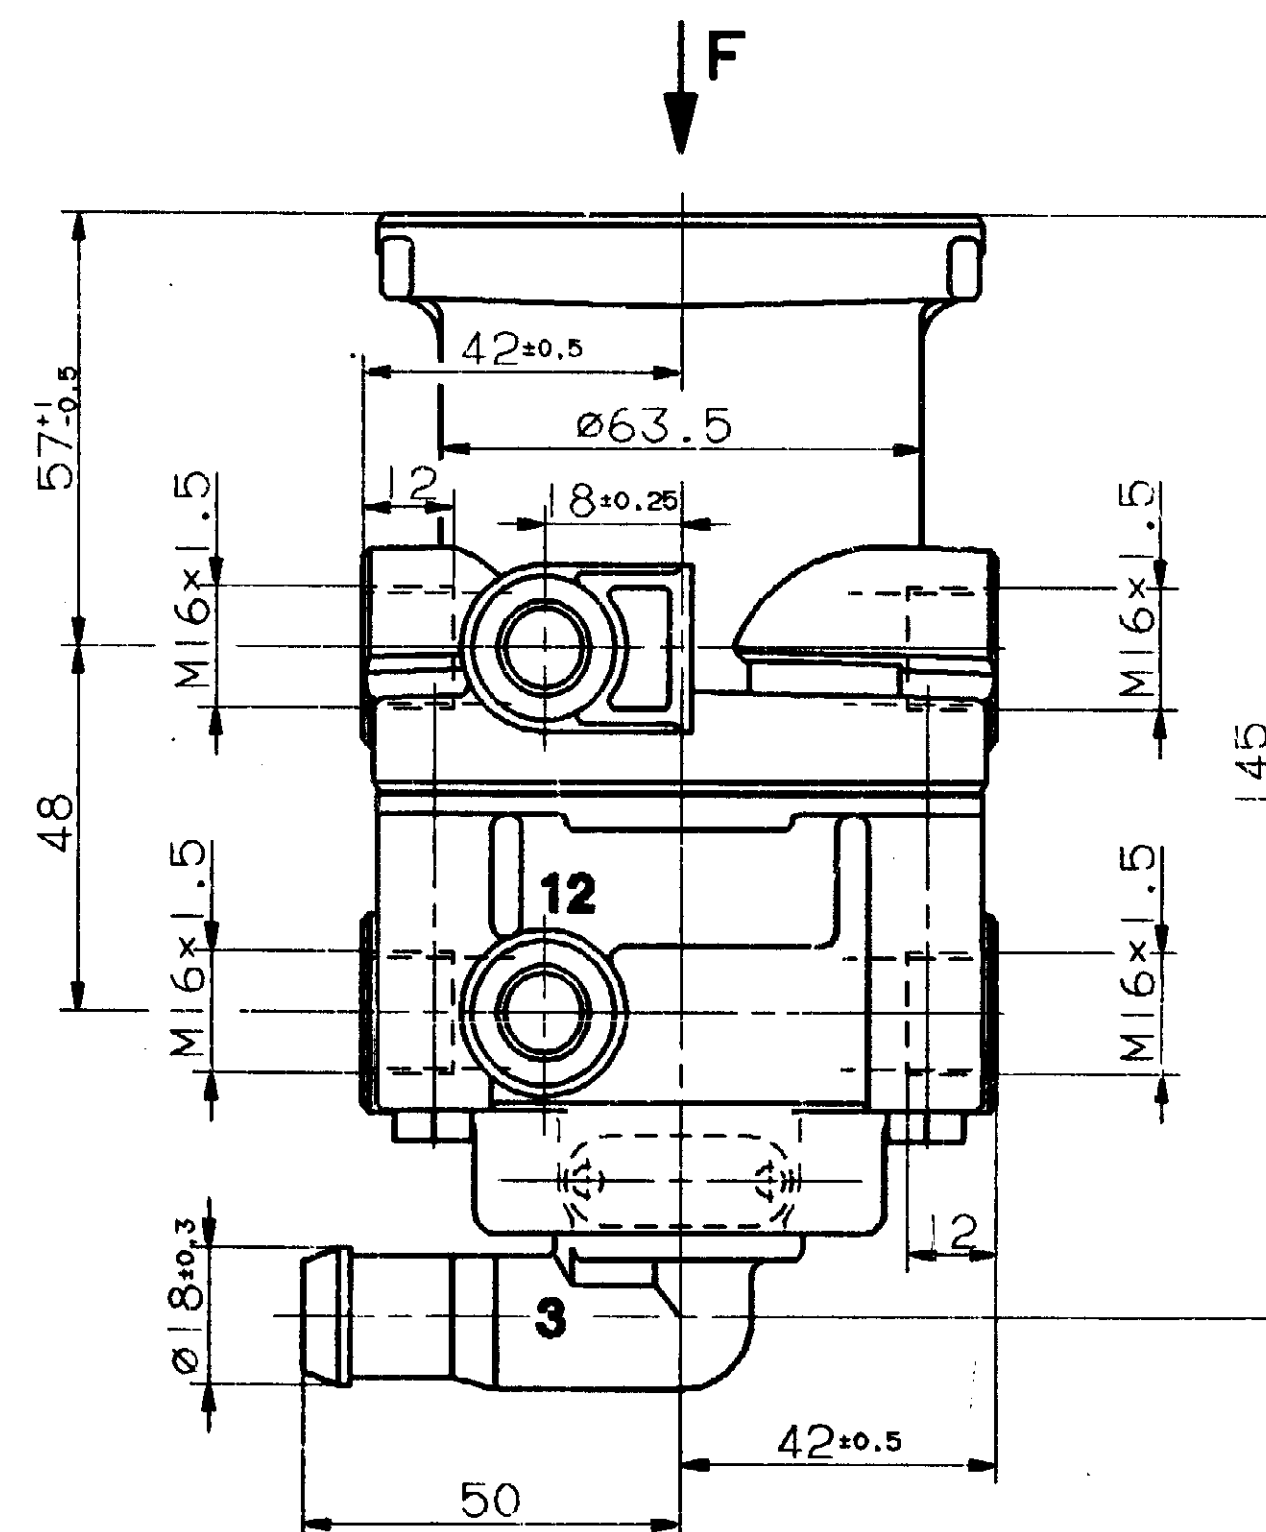

AT FAILURE CIRCUIT I : NECESSARY COURSE S ≥ 14 mm
 BEI AUSFALL KREIS I : NECESSARY FORCE F ≥ 3400 N
 EN CAS DE DEFAILANCE : NECESSARY COURSE S ≥ 14 mm
 CIRCUIT I : NECESSARY FORCE F ≥ 3400 N
 IN CASO DI DIFETTO : NECESSARY COURSE S ≥ 14 mm
 CIRCUIT I : NECESSARY FORCE F ≥ 3400 N

*) STOP WITHIN THE DEVICE ADMISSIBLE
ANSCHLAG IM GERAET ZULAESSIG
BUTEE DANS L APPARAIL ADMISE
ARRESTO NEL APPARATO AMMISSIBILE

11/12 SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE

21/22 OUTLET
AUSGANG
SORTIE
USCITA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO


MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

NOMINAL DIAMETER :
NENNWEITE : 78.5 mm ± 0.10
DIAMETRE NOMINAL :
DIAMETRO NOMINALE :

MAX. WORKING PRESSURE :
MAX. BETRIEBSDRUCK :
PRESSION C UTILISATION MAXI : $p_e = 10 \text{ bar}$
PRESSIONE DI ESERCIZIO MAX. :

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+80°C
GAMME D APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG
POSITION D'INSTALLATION: INDIFFERENT
POSIZIONE DI MONTAGGIO : INDIFFERENTE

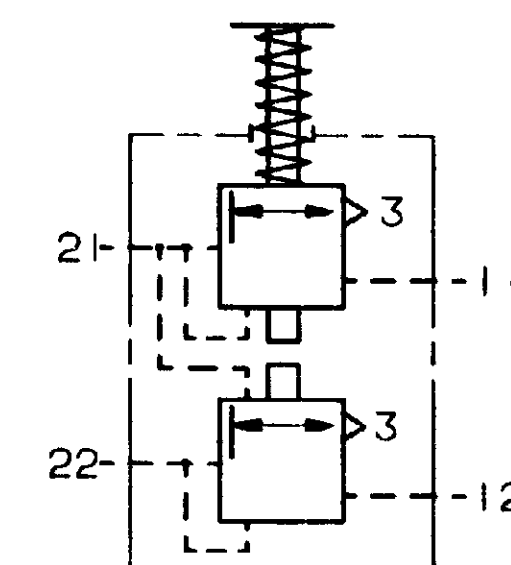

FURTHER TECHNICAL DATA SEE				COPYRIGHT		WABCO		CLAYTON DEWANDRE	
IDENTIFICATION NO.				DATE		SIGNATURE			
CODE FOR DOCUMENT: 606 SHEET: TO				55-05-28		M. SGF			
GENERAL TOLERANCES				DRAWN		CHECKED		BRAKE VALVE	
RANGE OF NOMINAL DIMENSIONS				99993		085-05-29		MOTWGN-BREMSVENTIL	
CLASS				F		H		ROBINET DE FREINAGE	
I				D		C		DISTRIBUTORE DI COMANDO	
II				B		A			
III				A		E			
MASS				1150		11		PRODUCT IDENTIFICATION NO.	
SIZE				140		140		461 315 008 0	
CODE FOR DOCUMENT				605		1			
CODE FOR GROUP				518		518		REPLACEMENT FOR	
CODE FOR SHAPE				518		518		ORIG. OF 81-01-16	
EXPERT CODE				717A		717A		TYPE OF PRODUCT	