

ALL ROUND
ALLSEITIG
** UNIVERSAL MAX.5°
SU CIASCUN LATO




21/22 OUTLET
AUSGANG
SORTIE
USCITA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

NOMINAL DIAMETER :
NENNWEITE : 78.5 mm ± 0.10
DIAMETRE NOMINAL :
DIAMETRO NOMINALE :

MAX. WORKING PRESSURE :
MAX. BETRIEBSDRUCK :
PRESSION D UTILISATION MAXI : $p_e = 10 \text{ bar}$
PRESSIONE DI ESERCIZIO MAX. :

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+80°C
GAMME D APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :

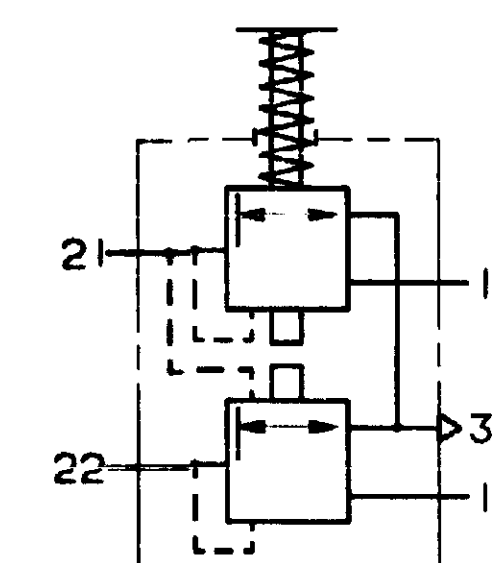

INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE
EINBAULAGE: ENTLUEFTUNG NACH UNTEN (MITTELACHSE DES GERÄTES
POSITION D'INSTALLATION: ÉCHAPPEMENT VERS LE BAS (ÉCART DE L'AXE
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO (DEVIAZIONE ASSE

FURTHER TECHNICAL DATA SEE				COPYRIGHT				CLAYTON DEWANDRE				
IDENTIFICATION NO. :				DATE				SIGNATURE				
CODE FOR DOCUMENT: 606				DRAWN				M. SGF				
SHEET: 10				CHECKED				BY				
GENERAL TOLERANCES				86-10-23				BRAKE VALVE				
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)				86-12-18				MOTWGN-BREMSVENTIL			
	II	≤50	>50	>180	MARTINI				ROBINET DE FREINAGE			
			≤180	STANDARDIZATION				DISTRIBUTEUR DI COMANDO				
			>400	86-12-19				PANTZER				
I		0,5	1,0	1,5	2,0	MASS		SCALE		PRODUCT IDENTIFICATION NO.		
II	X	1,0	2,0	3,0	4,0	1:250 kg		1:1		461 315 043 0		
III		2,0	3,5	5,0	6,5	SIZE		T.R.T.		CODE FOR DOCUMENT / SHEET		
TAPPED HOLES ACC. ISO 4039 / JED-182						A. I		140		605 1/1		
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.		REV.		DATE		
						A. I		140		518		
						100mm						