
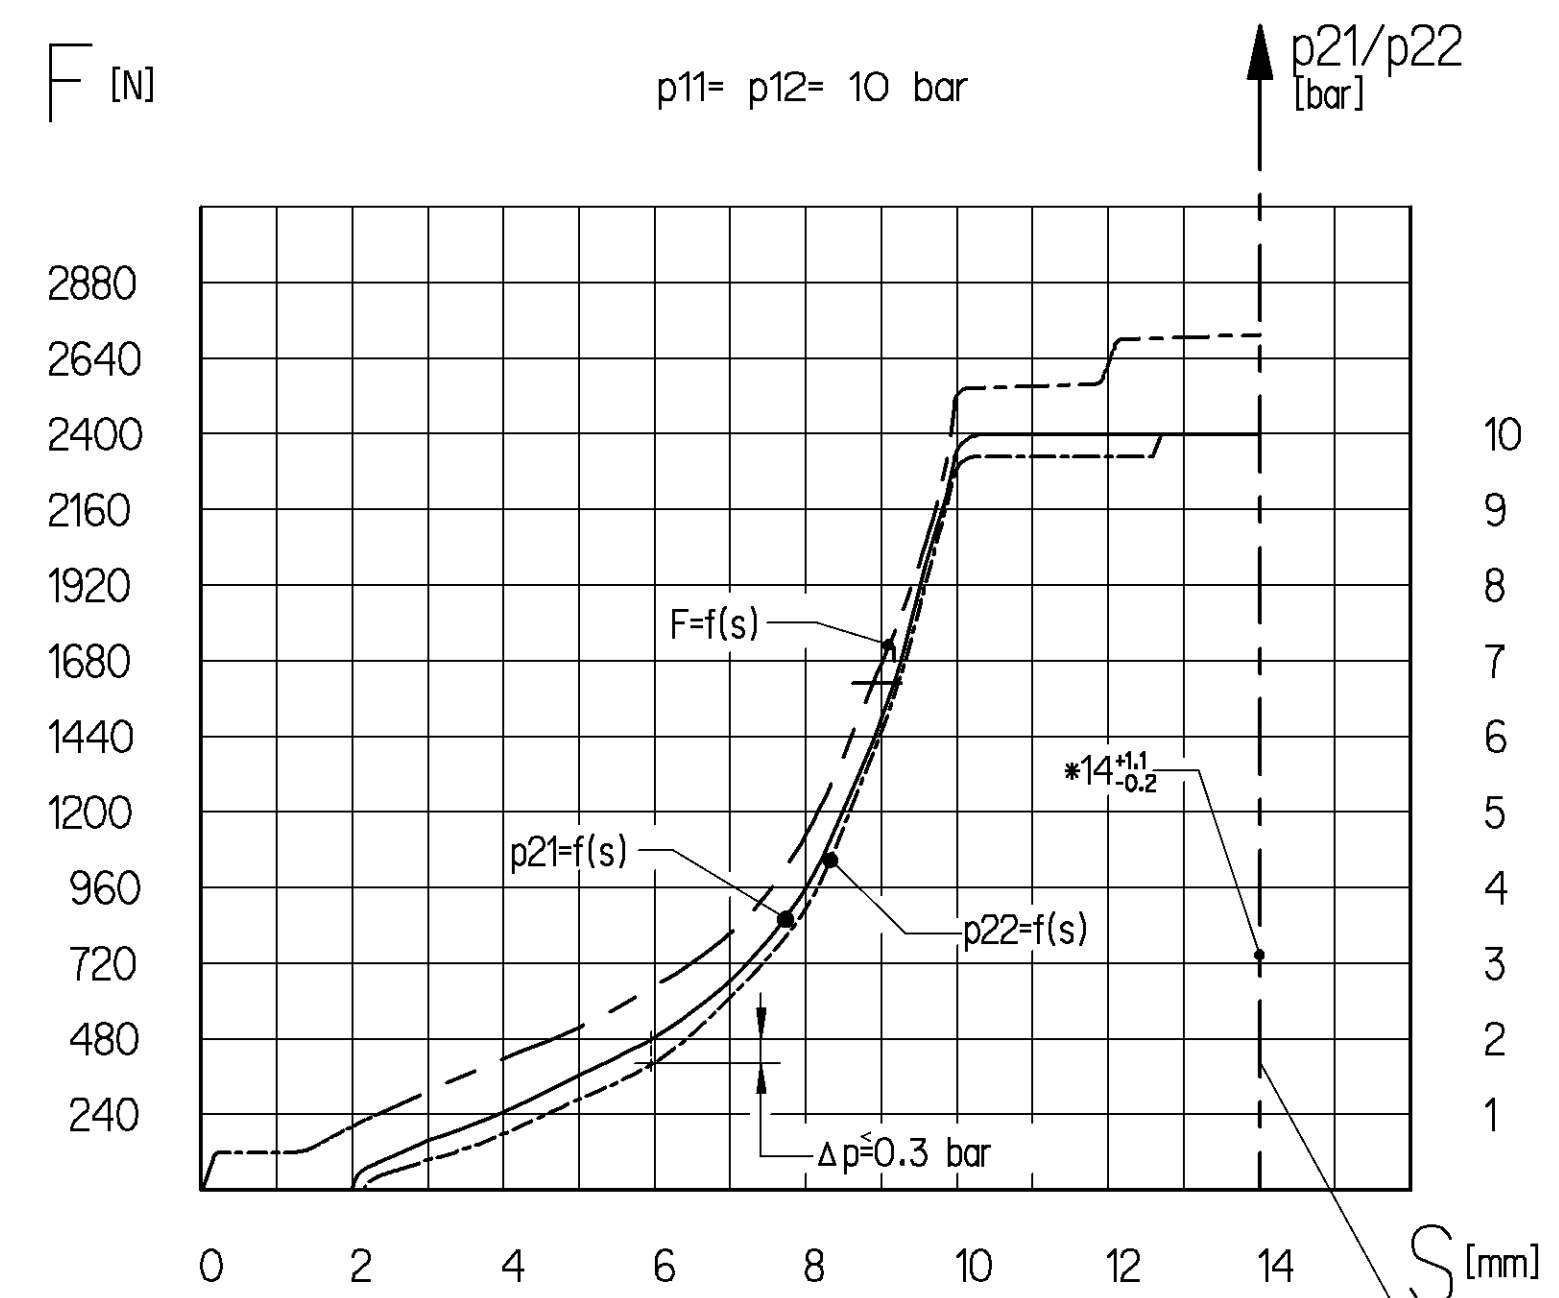
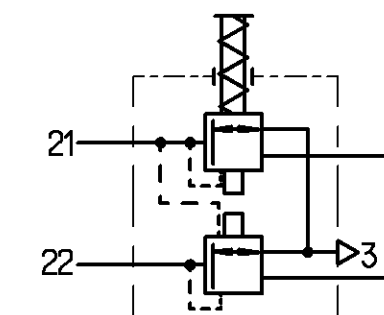
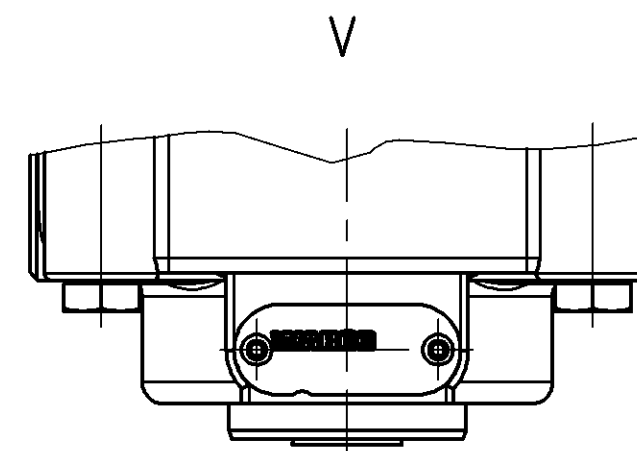
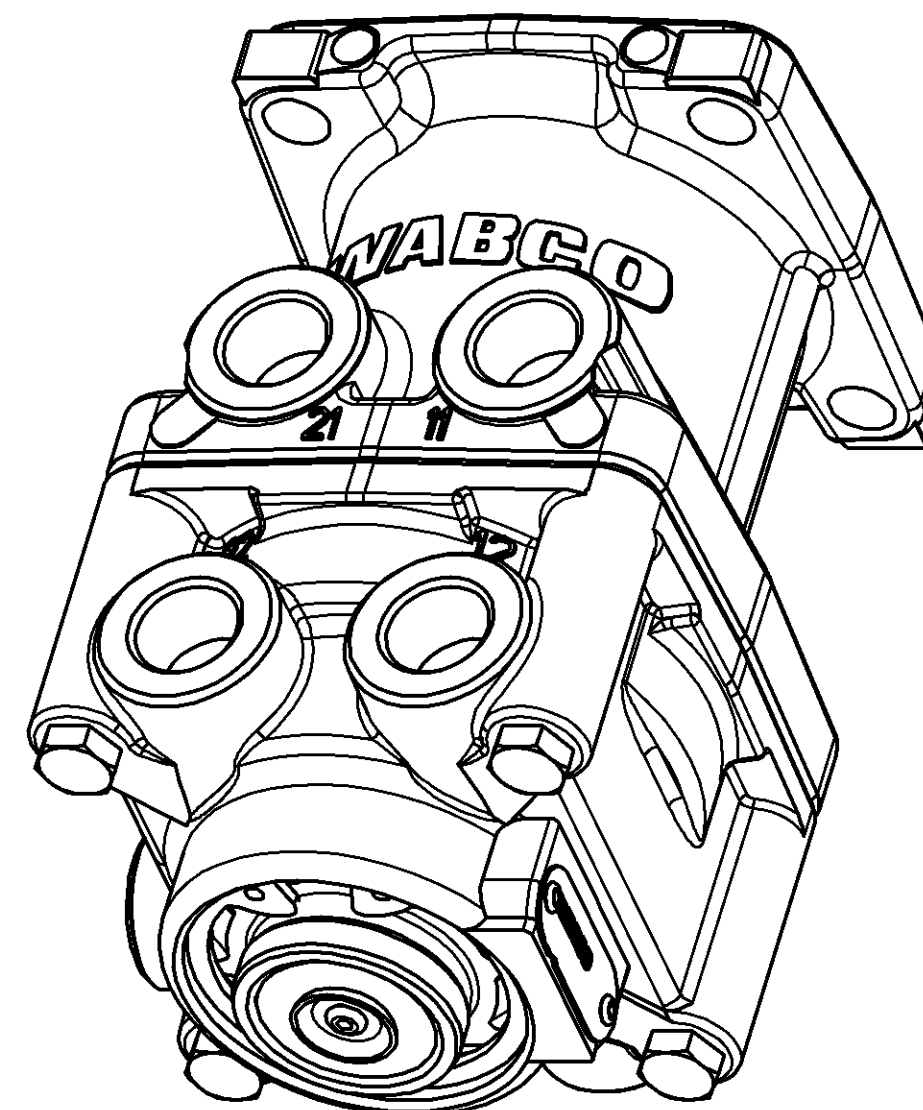


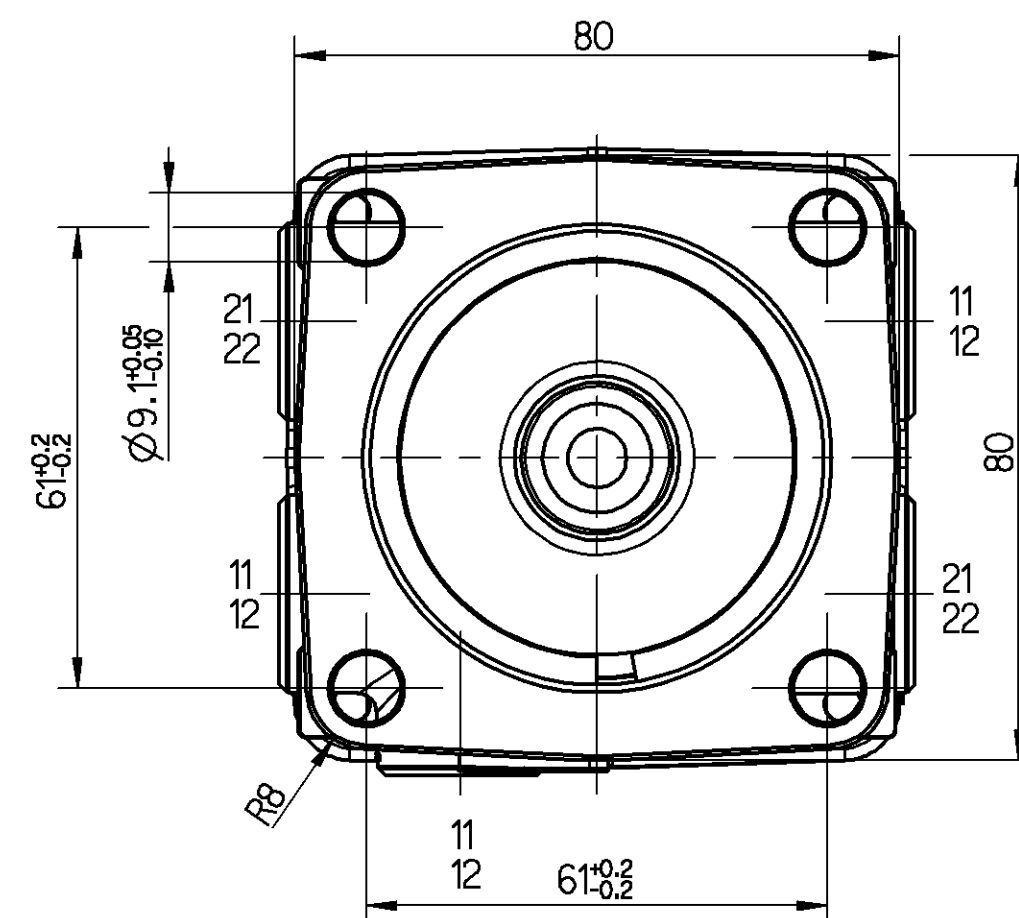

AT FAILURE CIRCUIT 1:	NECESSARY COURSE S ≥ 14 mm
	NECESSARY FORCE F = 4100 N
BEI AUSFALL KREIS 1:	ERFORDERLICHER WEG S ≥ 14 mm
	ERFORDERLICHE KRAFT F = 4100 N
EN CAS DE DEFAILLANCE:	COURSE NECESSAIRE S ≥ 14 mm
CIRCUIT 1	FORCE NECESSAIRE F = 4100 N
IN CASO DI DIFETTO:	CORSA NECESSARIA S ≥ 14 mm
CIRCUITI 1	FORZA NECESSARIA F = 4100 N


OUTLET		EXHAUST
AUSGANG		ENTLUEFTUNG
SORTIE	3	ECHAPPEMENT
USCITA		SCARICO

NOMINAL DIAMETER :
NENNWEITE : 78.5mm² Ø10
DIAMETRE NOMINAL :
DIAMETRO NOMINALE:

TEMPORARILY:
KURZZEITIG: pe = MAX. 11 bar
DE COURTE DUREE:
BREVE TEMPO SOLO:

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

TEMPORARILY:
KURZZEITIG: pe = MAX. 11 bar
DE COURTE DUREE:
BREVE TEMPO SOLO:

GENERAL SPECIFICATION:				JED-334-0						Pro/ENGINEER DRAWING COPYRIGHT				WABCO											
FURTHER TECHNICAL DATA:										DATE								SIGNATURE							
DOC. CODE:				SHEET:				TO				DRAWN				BRAKE VALVE MOTORWAGEN-BREMSVENTIL ROBINET DE FREINAGE DISTRIBUTORE DI COMANDO									
GENERAL TOLERANCES										03-08-07 WEINING				CHECKED											
RANGE OF NOMINAL DIMENSIONS (± mm)										03-08-07 MARTINI				EXPORT CODE											
										7 3 6															
CLASS		1)		≤ 50		> 50 ≤ 180						MASS		SCALE		PRODUCT IDENTIFICATION NO.				DOC. CODE		SHEET			
				≤ 180		< 400 >						1:1		kg		461 315 079 0		605		1 / I					
FINE		X		0.5		1.0		1.5		2.0				SIZE											
MEDIUM		X		1.0		2.0		3.0		4.0				TRI											
COARSE				2.0		3.5		5.0		6.5															
TAPPED HOLES ACC. ISO 9000/ASME Y14.5												A		I 140				FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR	
1) TOLERANCE CLASS APPLIED CROSSMARKED								DCN-NO.		REV.		DATE						0.0		☒					