

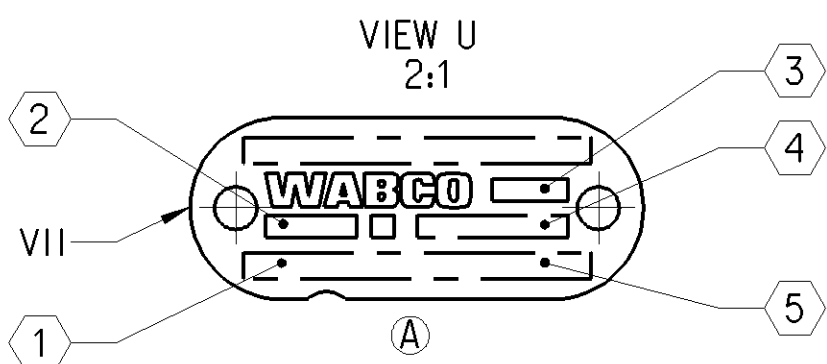
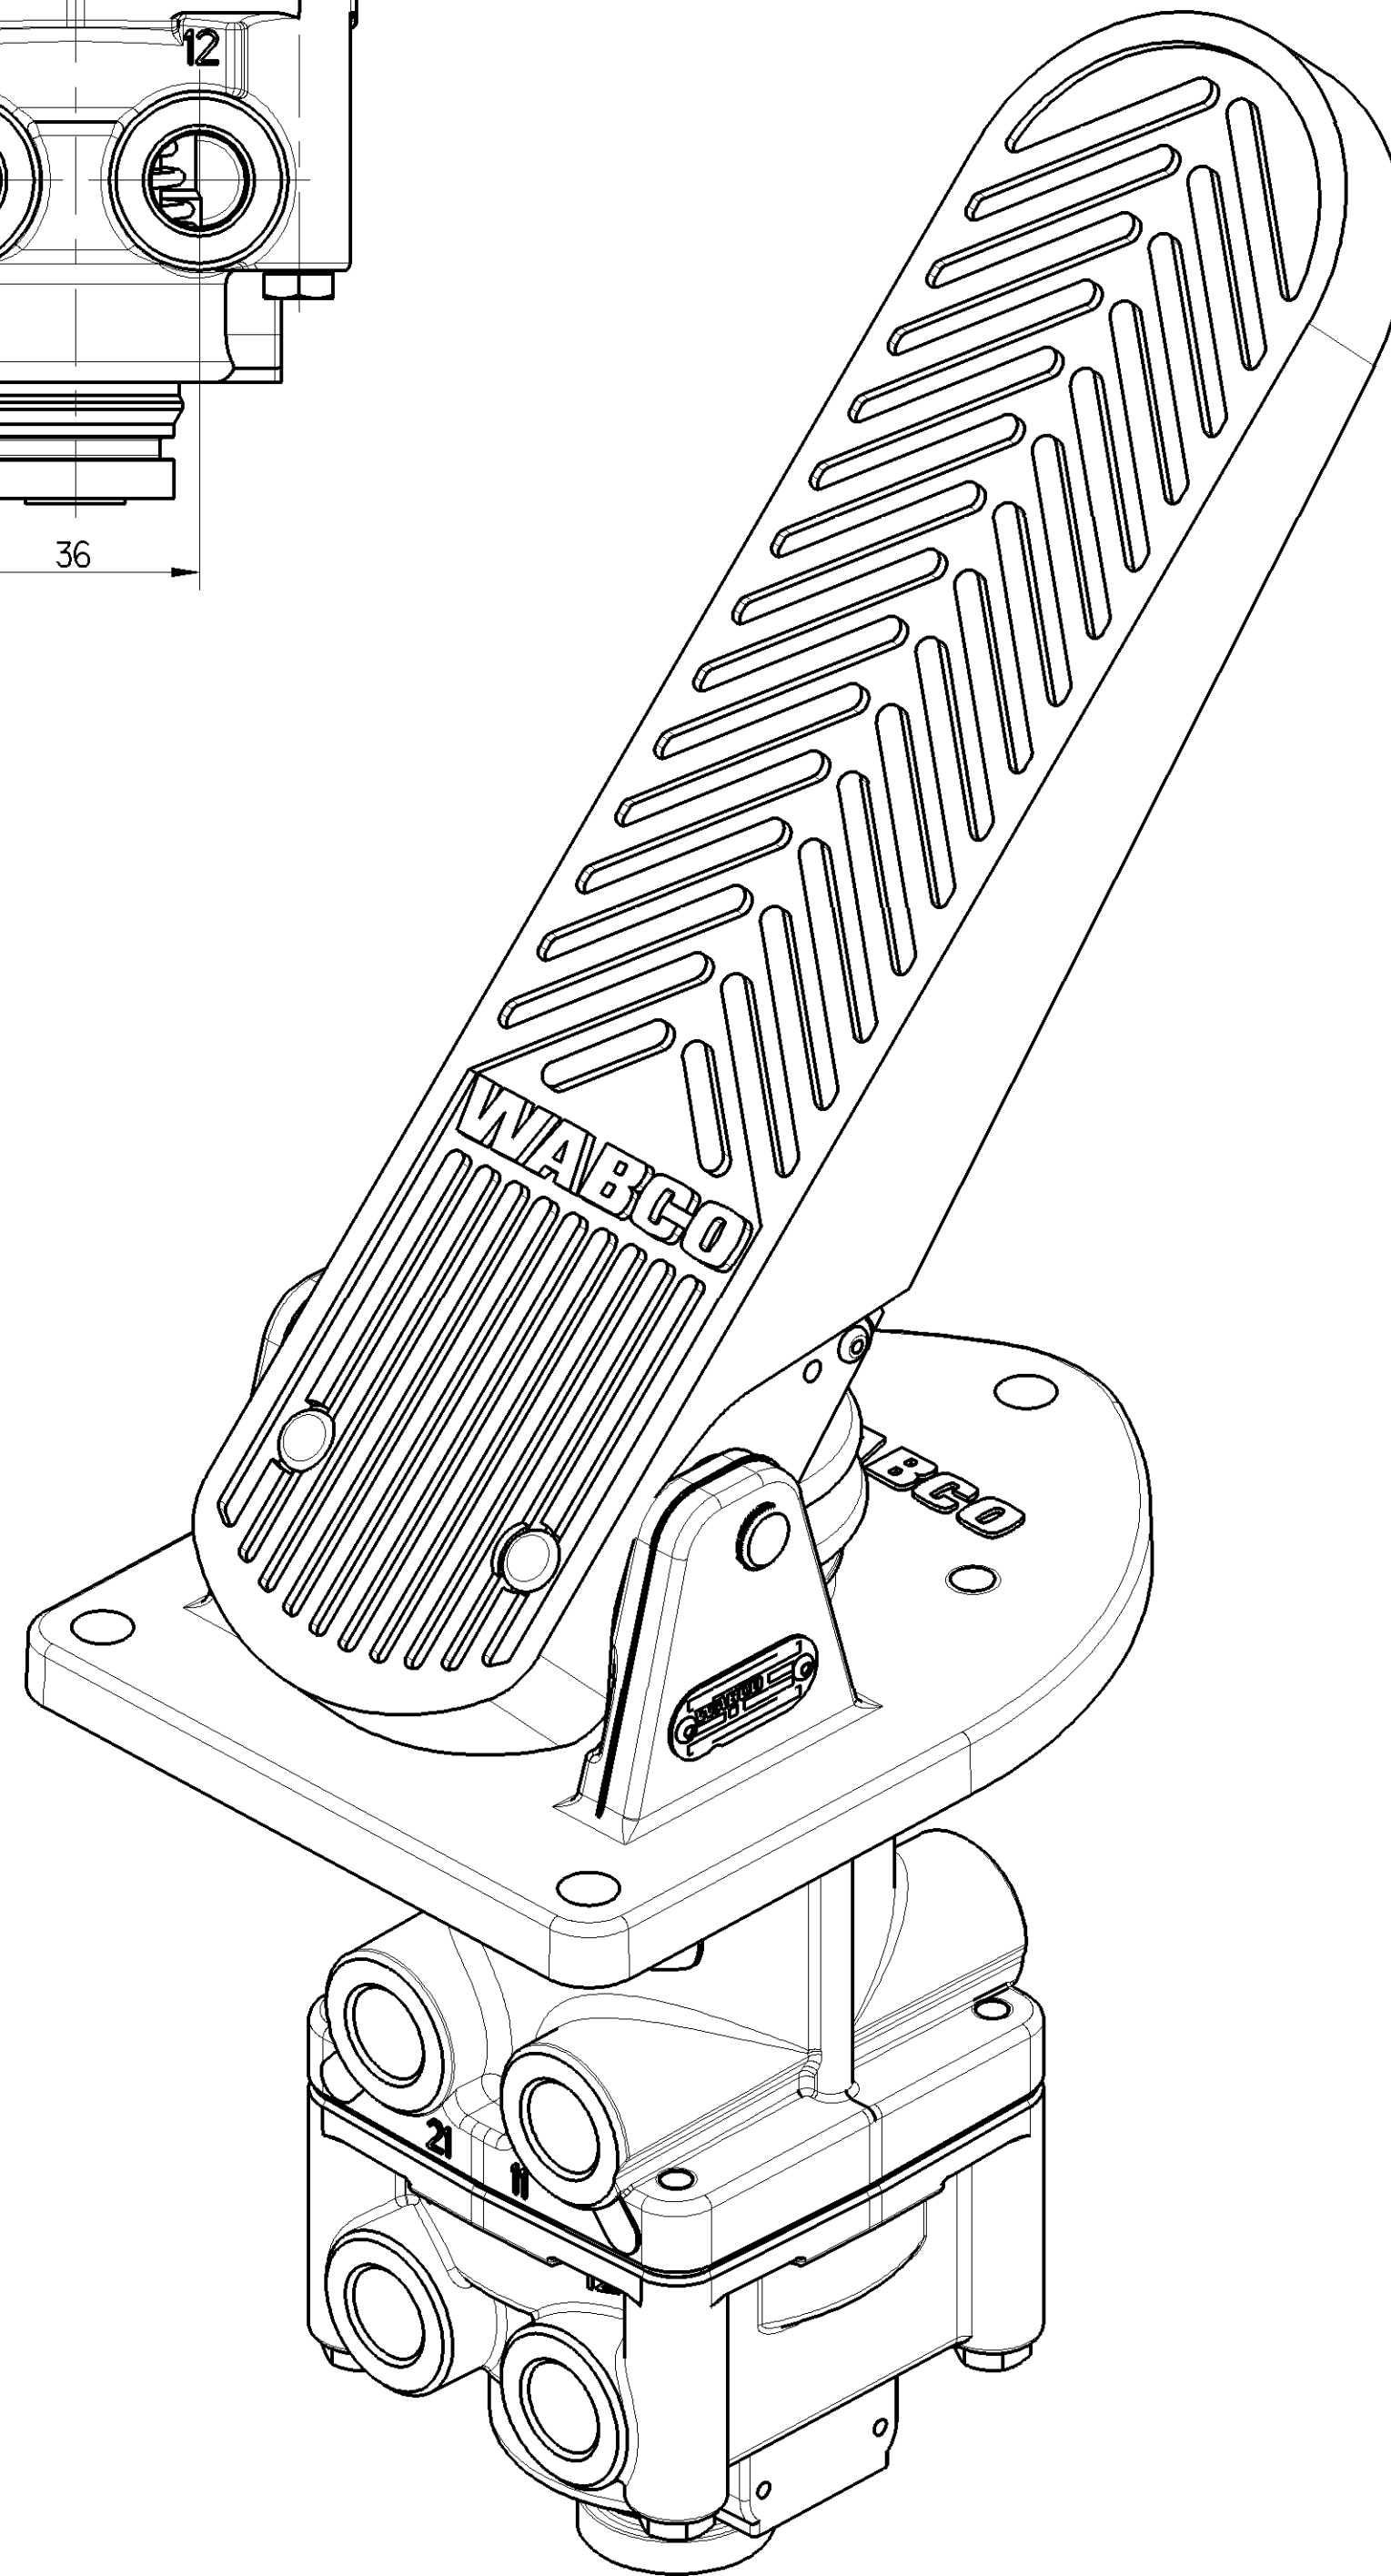
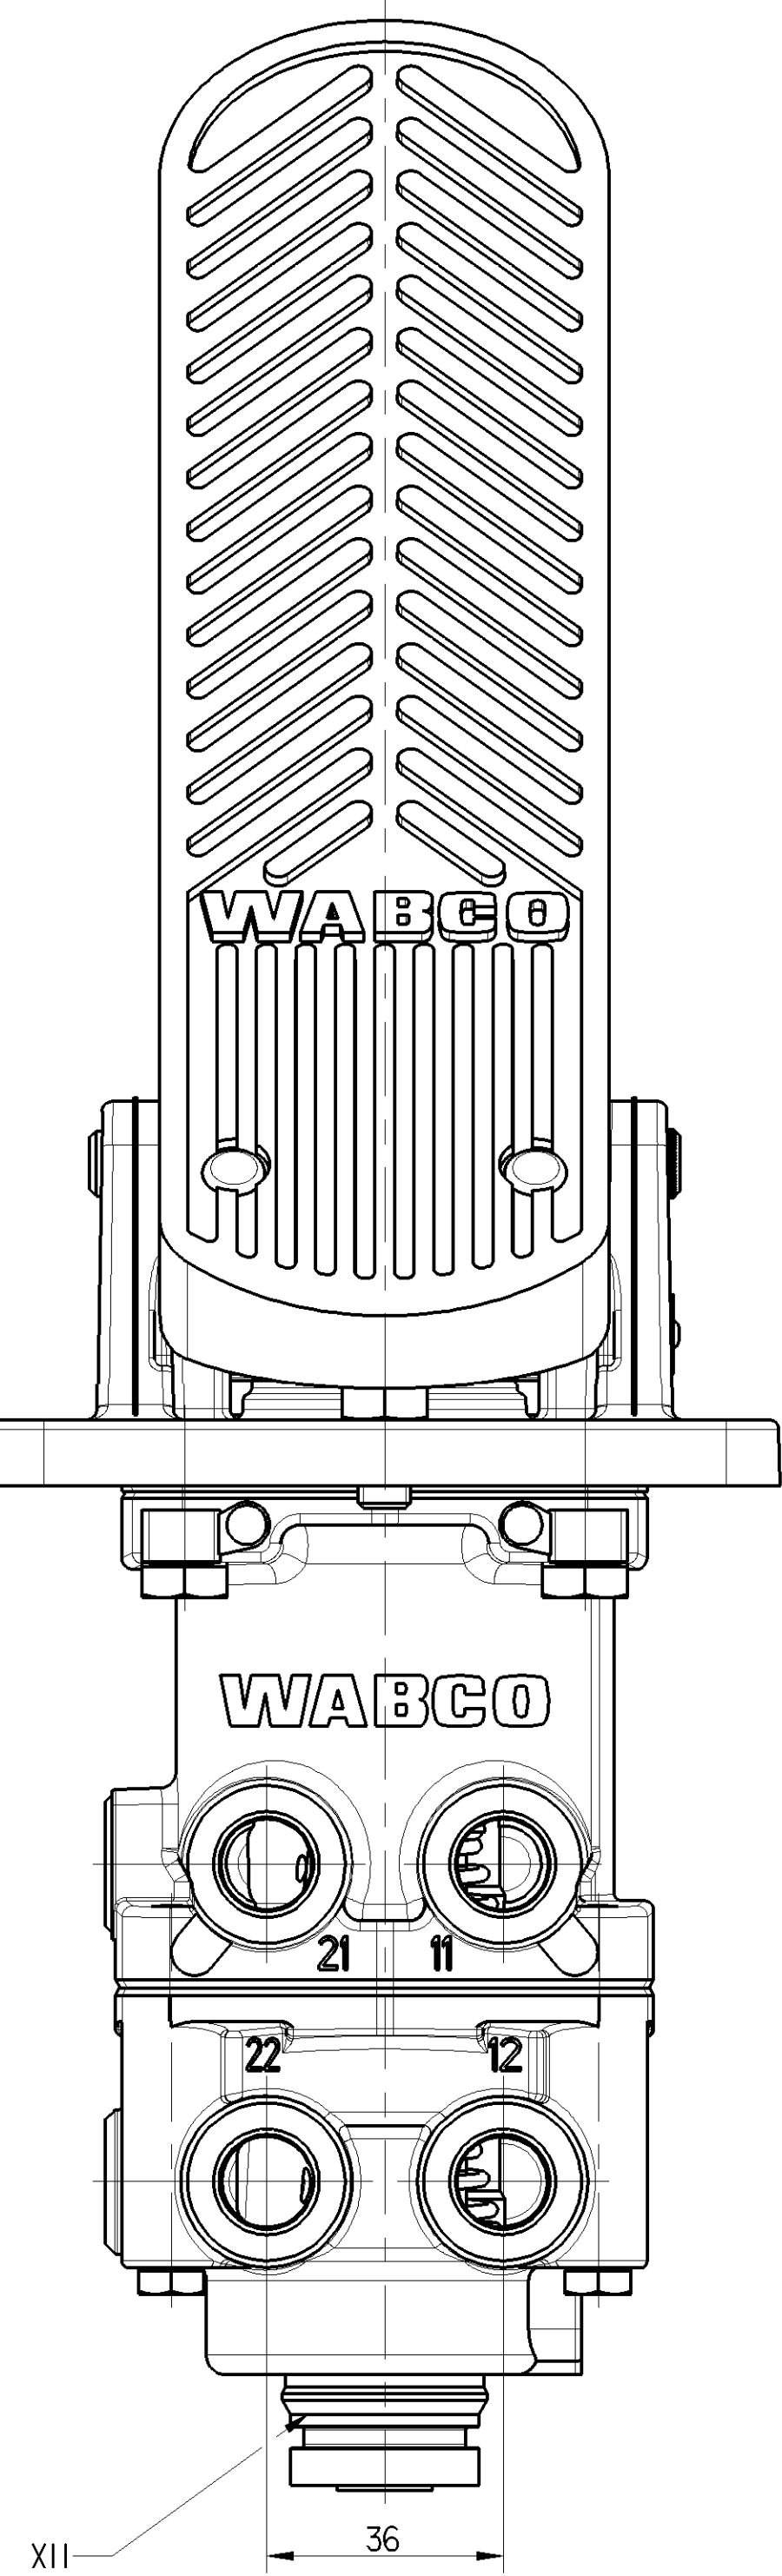
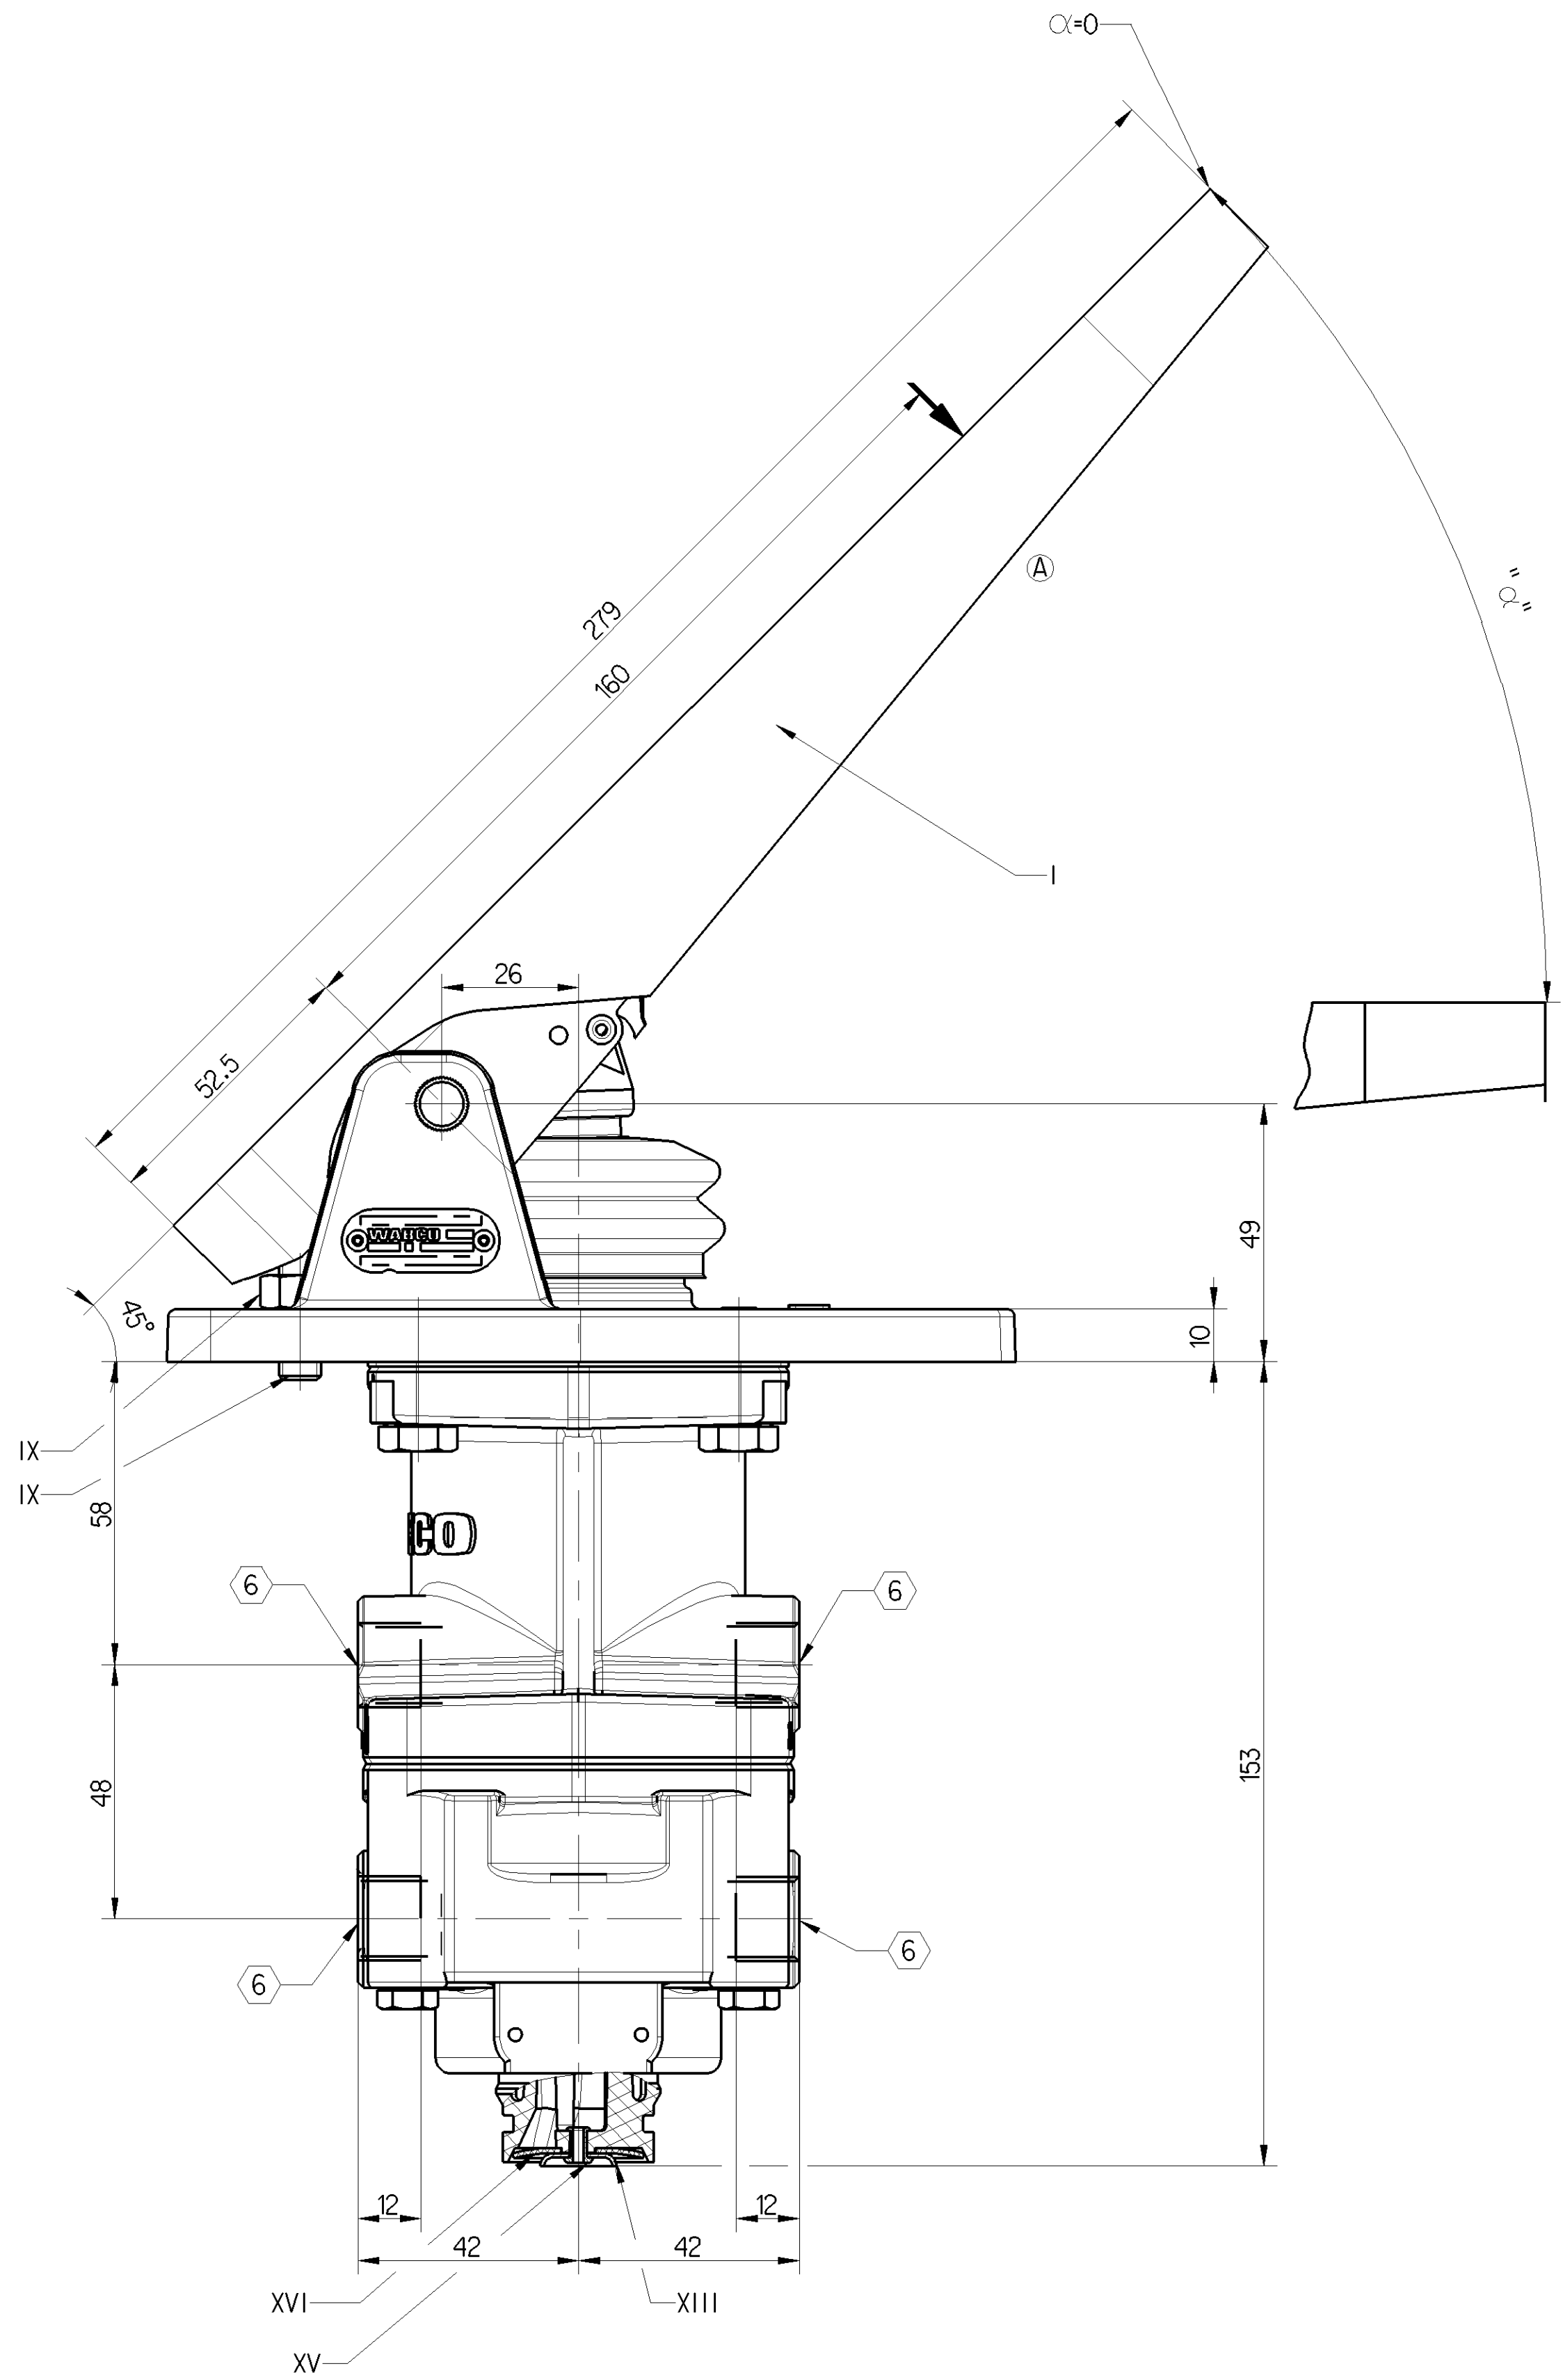


S.No.		NOTES
1	PRODUCT FUNCTION AND RELIABILITY	
1.1	WORKING MEDIUM	AIR
1.2	NORMAL WORKING PRESSURE	10 bar
1.3	MAXIMUM OPERATING PRESSURE (TEMPORARILY)	11 bar
1.4	NOMINAL FLOW DIAMETER	≥ Ø10 mm
1.5	THERMAL RANGE OF APPLICATION	-40°C TO +80°C
1.6	INSTALLATION POSITION	EXHAUST SHOWN AT BASE (AXIS CENTER OF THE DEVICE DEVIATES MAX. ±45° FROM VERTICAL)
2	OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES	


S.NO	MATERIAL	SURFACE PROTECTION
I	PUR, JED-047-M1	-
II	STEEL, JED-021-M4	Zn/Fe, JED-256-3
III	AL, JED-001-M3	Cr(III), JED-259
IV	PVC, JED-045M	-
V	POM, JED-005M	-
VI	STEEL, JED-027-M	Zn/Fe, JED-256
VII	AL, JED-077-1	ANODIZED, JED-007-1
VIII	PA6.6, JED-359	-
IX	STEEL, JED-051-M4	Zn/Fe, JED-256-1
X	STEEL, JED-022-M3	Zn/Fe, JED-256
XI	AL, JED-029-M1	Cr(III), JED-259
XII	POM, JED-005M1	-
XIII	STEEL, JED-021-M3	Zn/Fe, JED-256-1
XIV	ALMG 3.5	BONDED COATING
XV	ALMG 5	-
XVI	NBR, JED-235	-

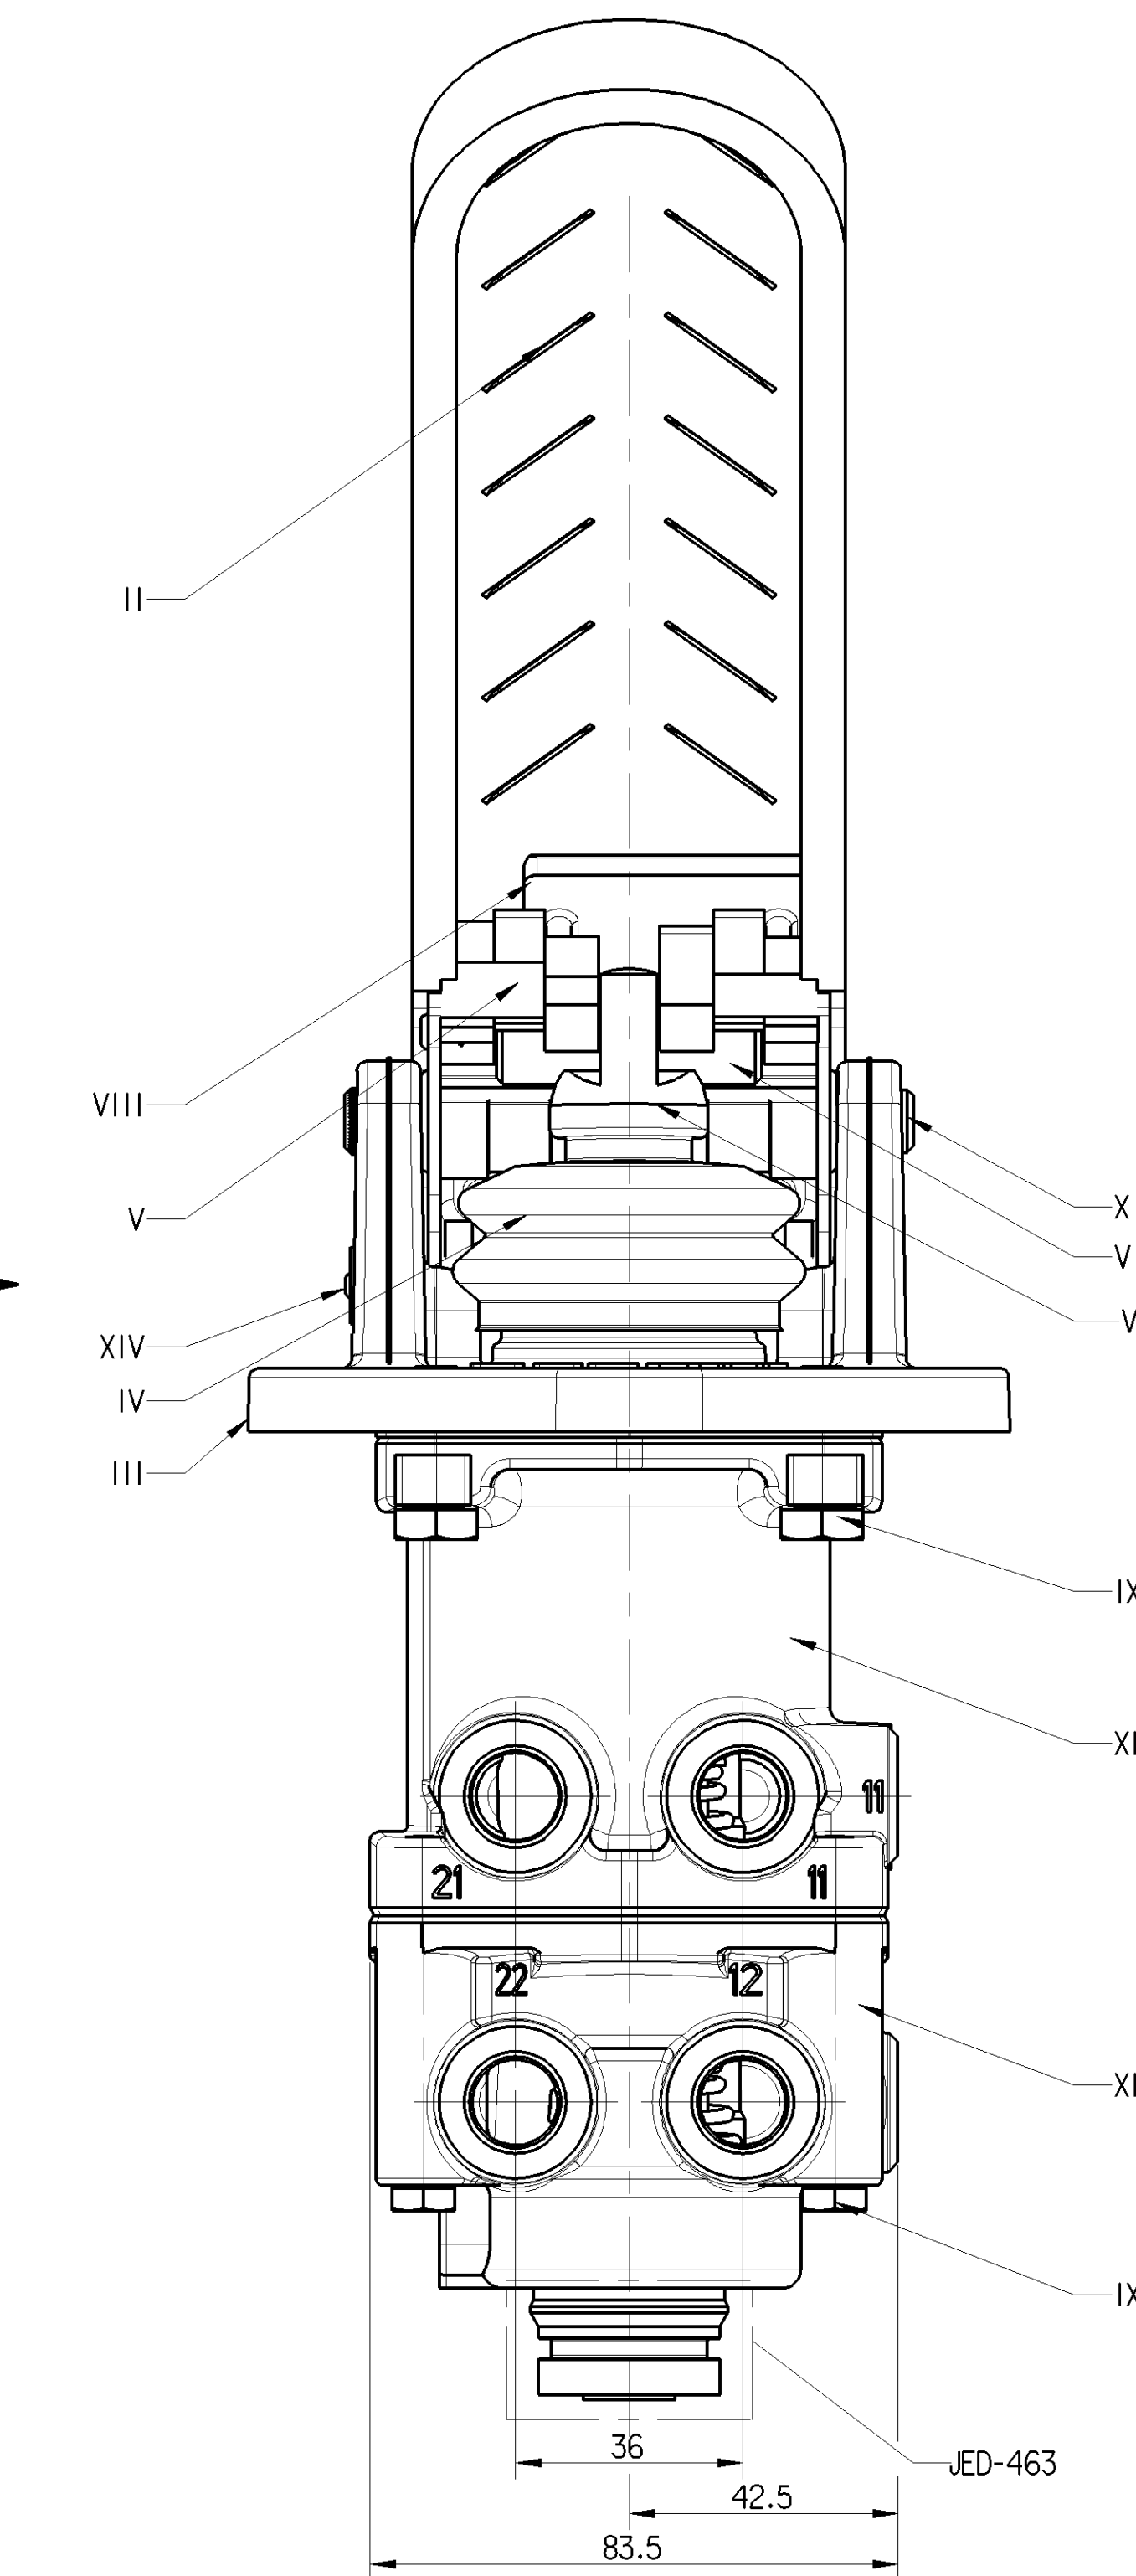


- ① WABCO PART NUMBER
② WEEK AND YEAR OF MANUFACTURING
③ CUSTOMER PART NUMBER
④ MANUFACTURING LOCATION CODE
⑤ SERIAL NUMBER

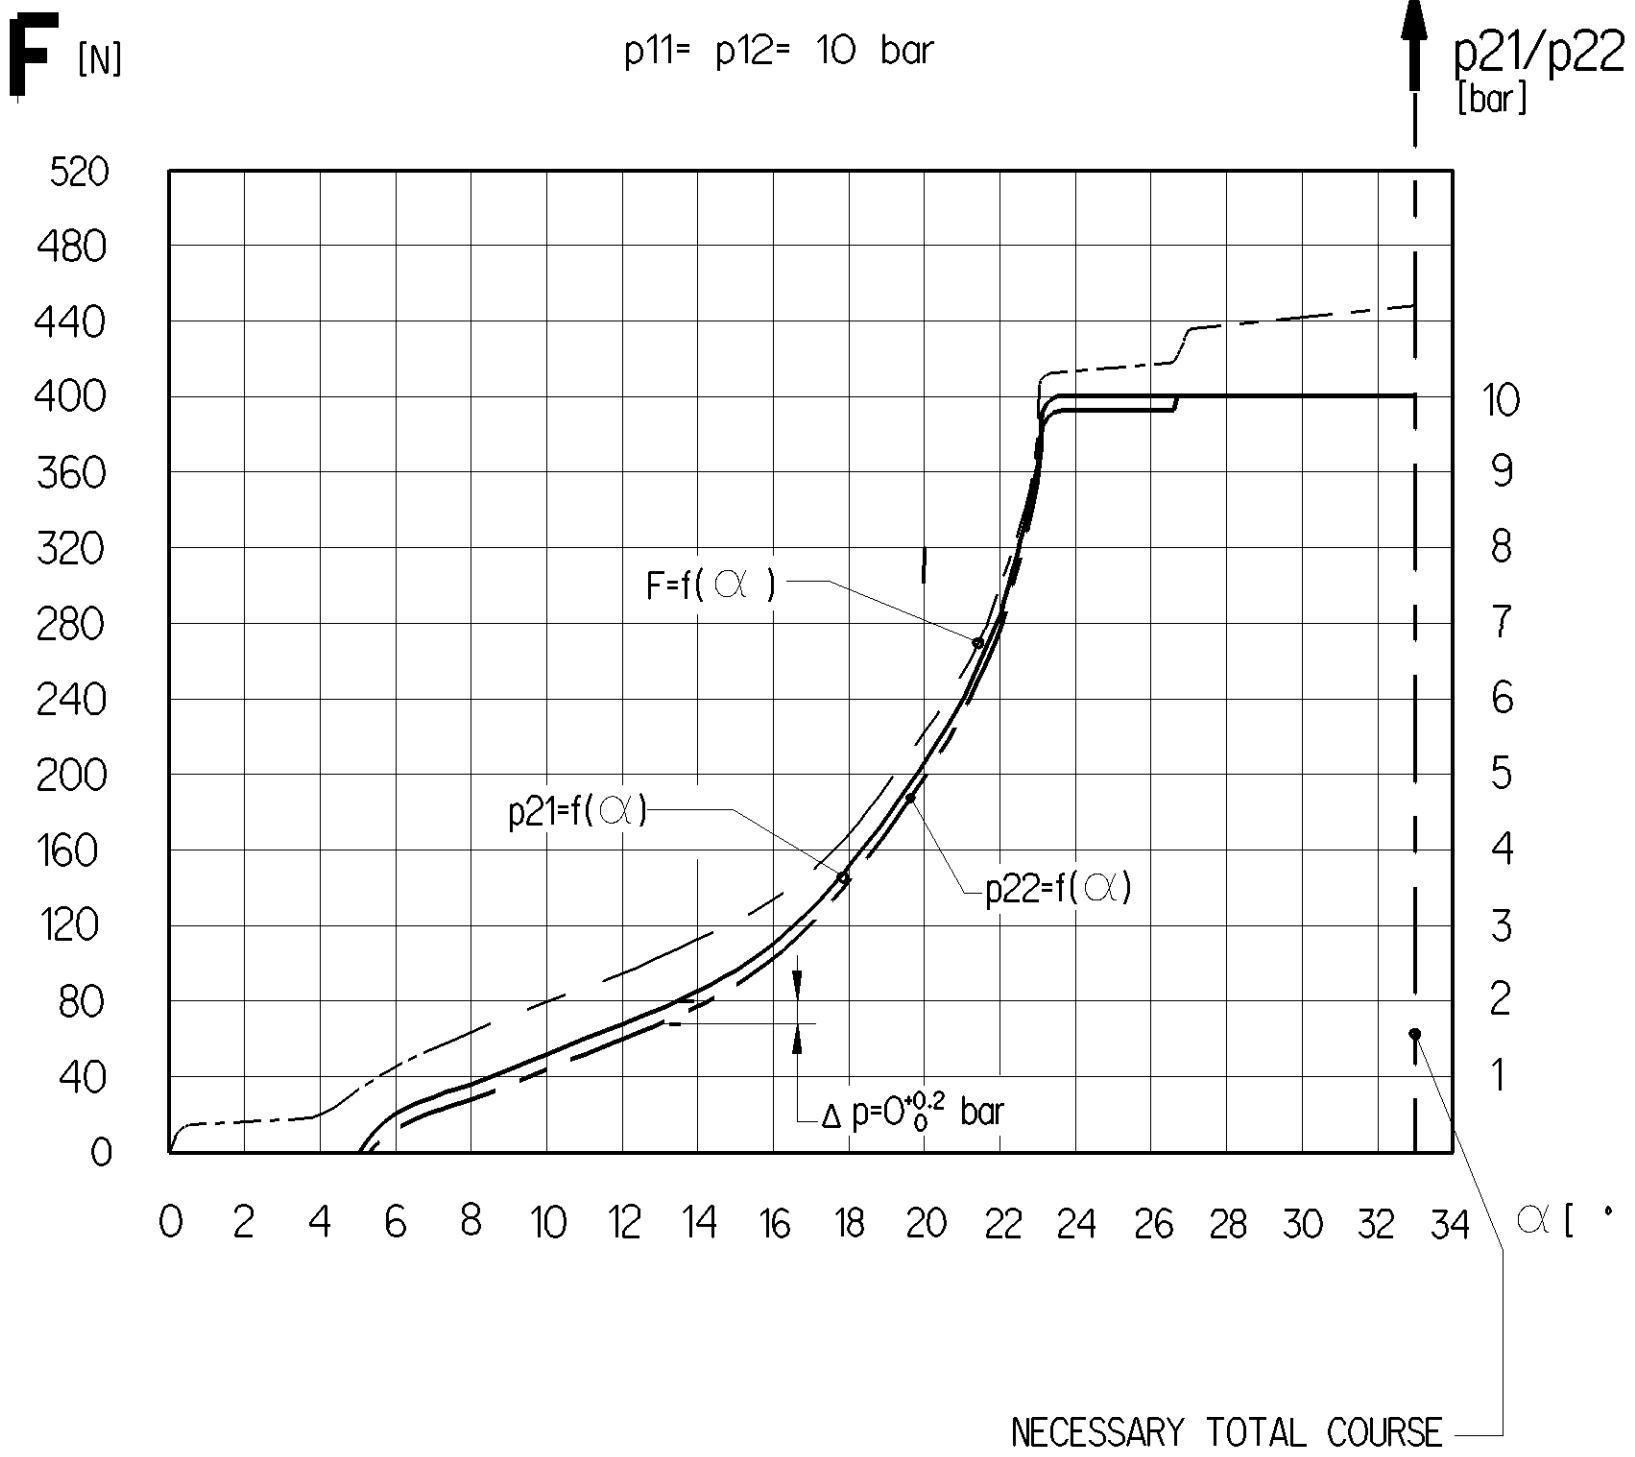


SCHEMATIC DIAGRAM

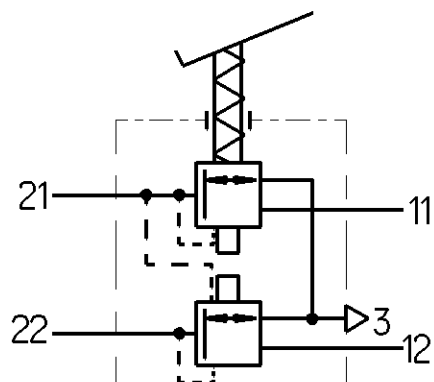

- 11 / 12 - SUPPLY
21 / 22 - OUTLET
3 - EXHAUST

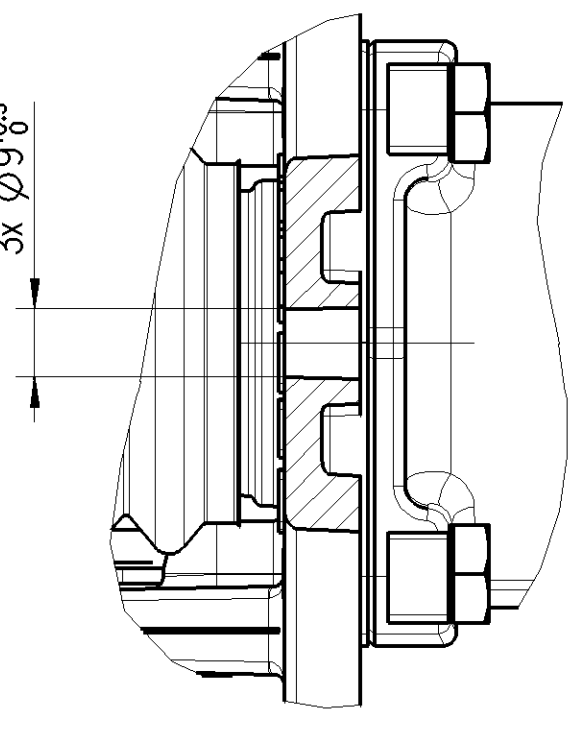

C-C

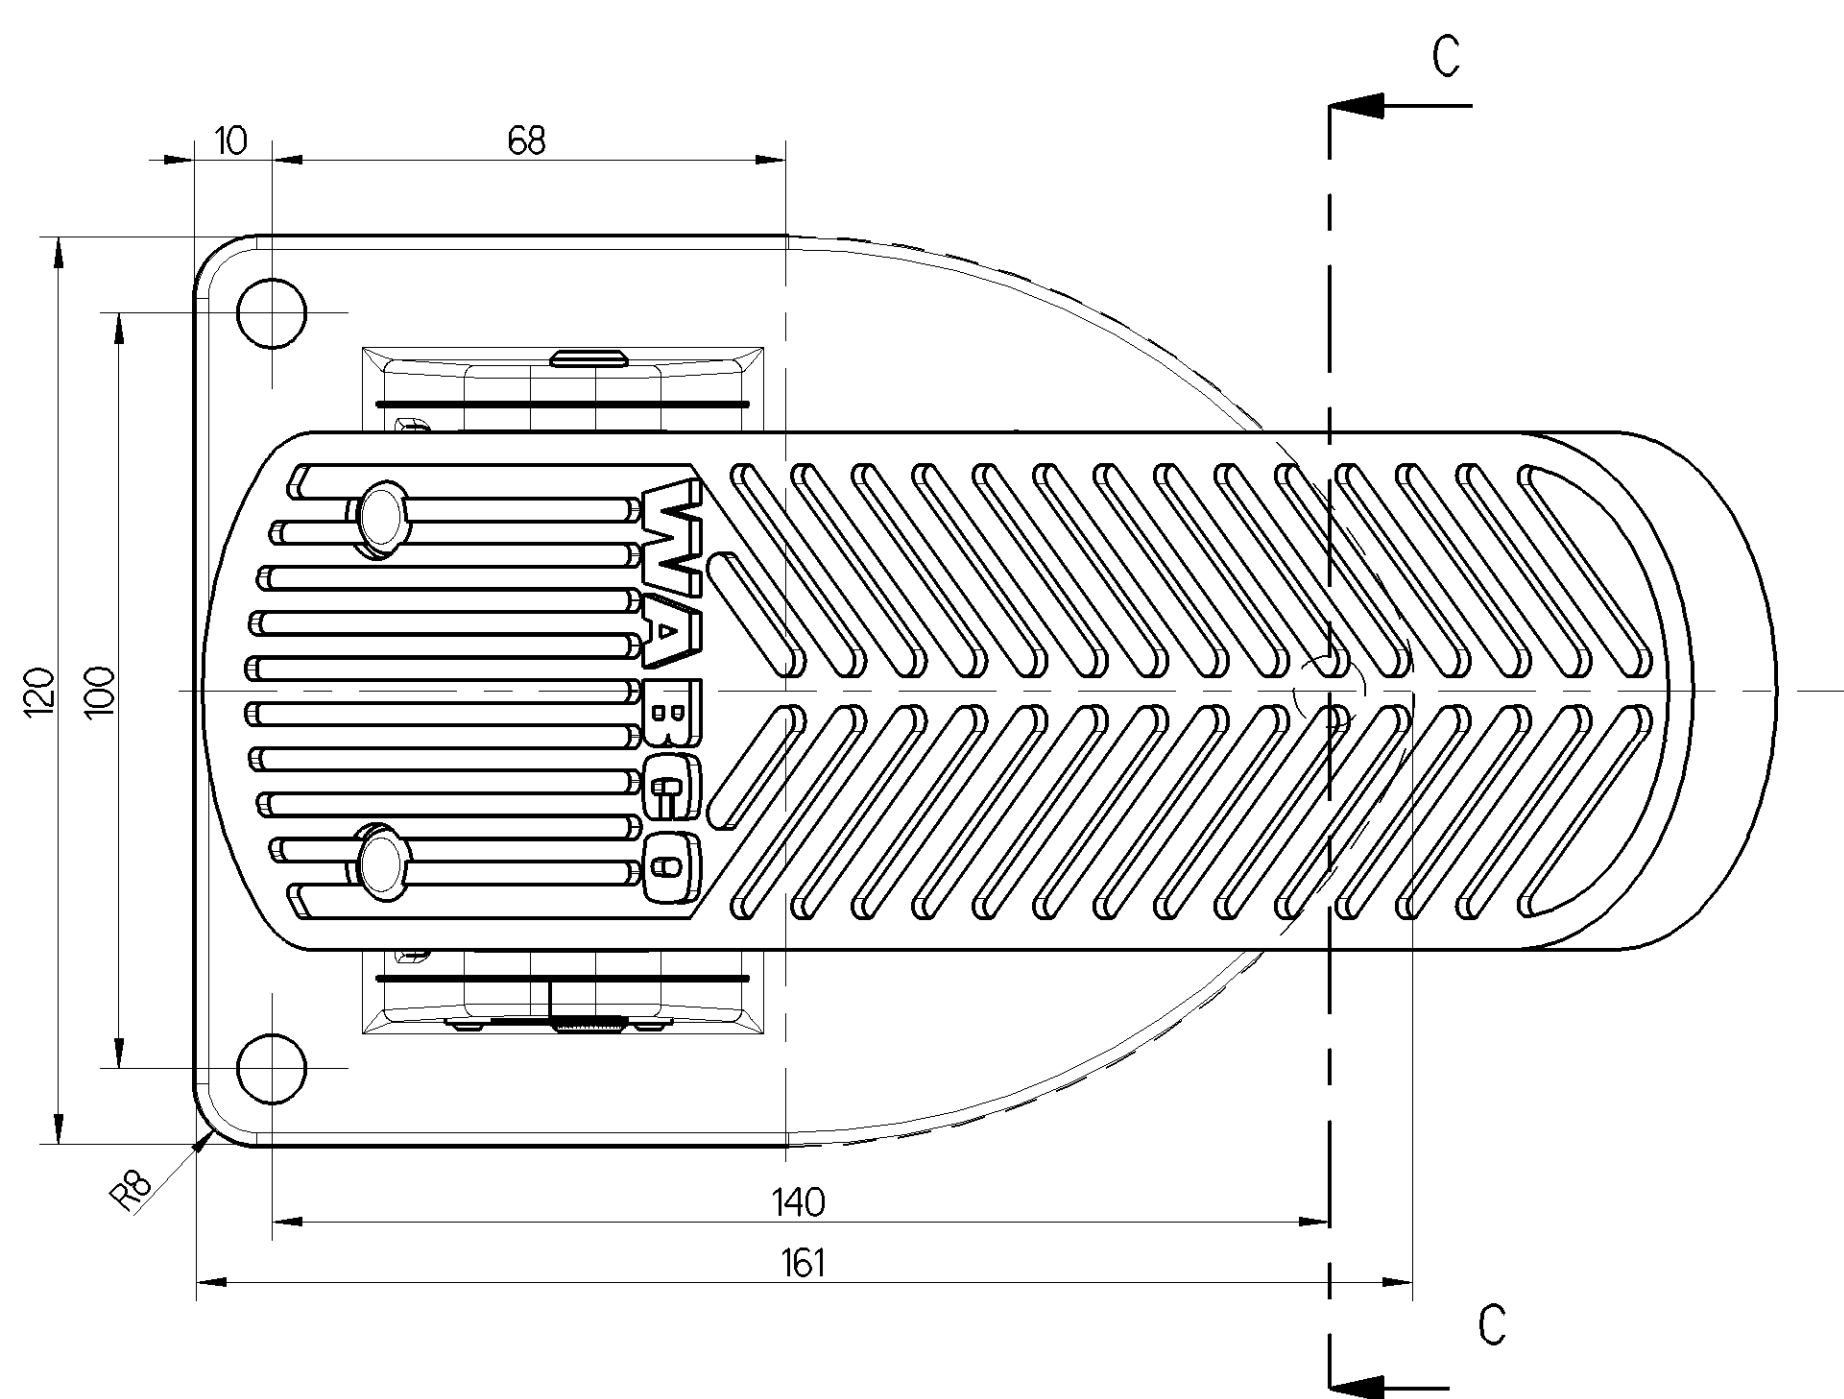

PORT NUMBER		⑥
THREAD TYPE		M16x1.5 / JED-152
PERMISSIBLE TORQUE		MAX. 34 Nm / JED-366

General Specifications JED-554-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data 461 317 030 0		Date		Signature	
Doc. Code: 030		Sheets		To 4	
General Tolerances JED-261		2017-02-10		Protop	
Range of Nominal Dimensions (± mm)		2017-02-14		Vinithumar	
Class II		± 0.5		± 1.0	
Fine		± 0.5		± 1.0	
Medium		± 1.0		± 2.0	
Coarse		± 2.0		± 3.0	
Tapped Holes acc. JED-152		± 0.5		± 1.0	
Tolerance Class Applied (unannotated)		A 0		CRO	
Date of first issue		2017-02-10		2017-02-10	
Doc. Code		461 317 030 0		005	
Language		EN		1/1	