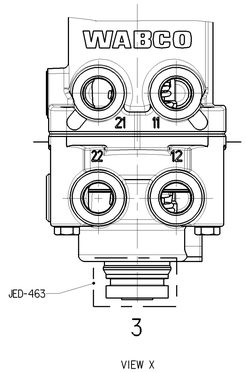

VIEW X

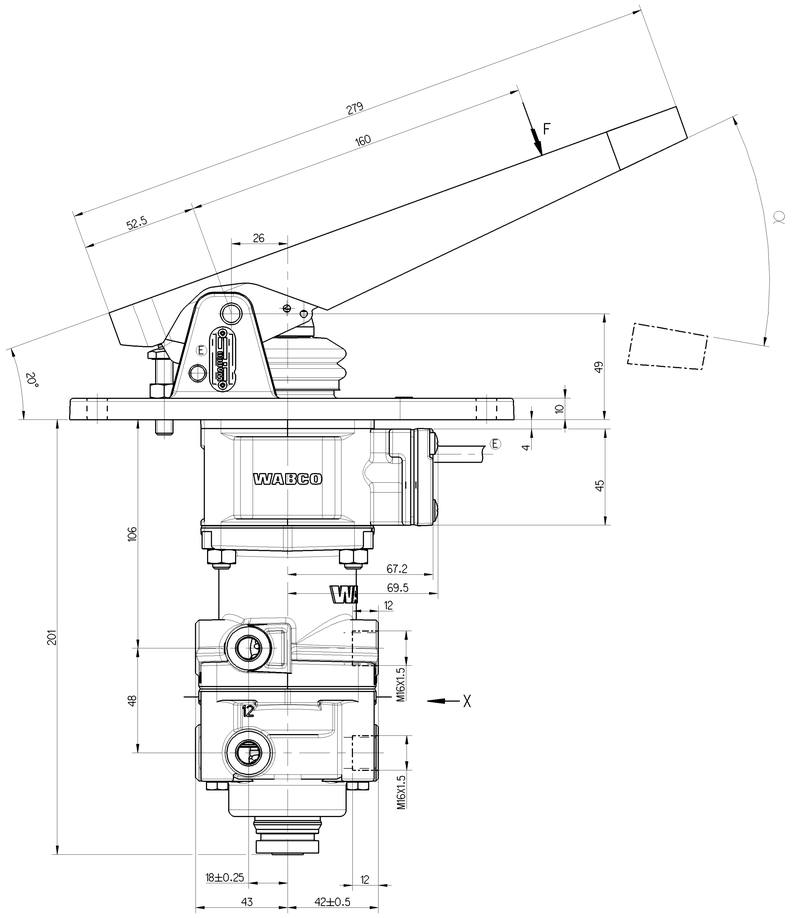

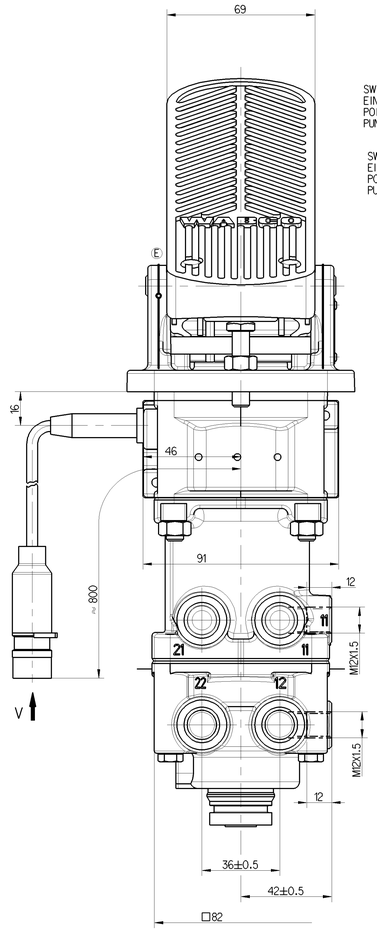

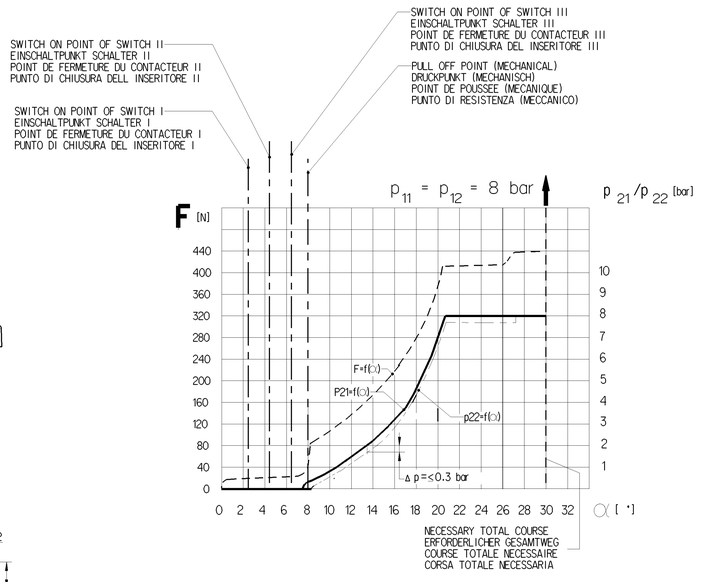

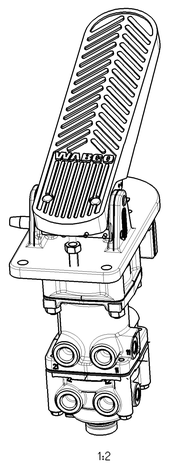

11/12	SUPPLY VORRAT ALIMENTATION ALIMENTAZIONE	21/22	OUTLET AUSGANG SORTIE USCITA	3	EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

NOMINAL DIAMETER :
NENNWEITE : 78.5 mm² ≙ Ø10 mm
DIAMETRE NOMINAL :
DIAMETRO NOMINALE:

WORKING PRESSURE BETRIEBSDRUCK PRESSION D'UTILISATION PRESSIONE DI ESERCIZIO	: p_e = MAX.8.5 bar	(TEMPORARILY (KURZZEITIG (DE COURTE DUREE (BREVE TEMPO SOLO	: p_e = MAX.10 bar)

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C . . . +80°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE DEVICE DEVIATES MAX. 45° FROM VERTICAL)
EINBAULAGE: ENTLUEFTUNG NACH UNTEN (MITTELACHSE DES GERAETES MAX. 45° VON DER SENKRECHTEN ABWEICHEND)
POSITION D'INSTALLATION: ECHAPPEMENT VERS LA BAS (ECART DE L'AXE MEDIAN DE L'APPAREIL PAR RAPPORT A LA VERTICALE: 45° MAX.)
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO(DEVIAZIONE ASSE APPARECCHIO RISPETTO ALLA VERTICALE: MAX. 45°)

SWITCH LOAD I, II, III : AT 24 V -1 A (INDUCTIVE LOAD)
SCHALTERBELASTUNG I, II, III : BEI 24 V - 1 A (INDUKTIVE LAST)
CHARGE DU CONTACTEUR I, II, III : A 24 V - 1 A (CHARGE INDUCTIVE)
CARICO DELL INSERITORE I, II, III : A 24 V - 1 A (CARICO INDUTTIVO)

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: M=MAX. 21 Nm
COUPLE DE SERRAGE DES RACCORDS: M16x1.5: M=MAX. 34 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

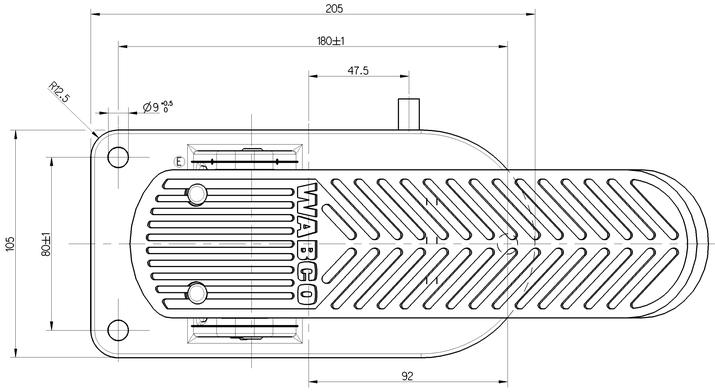

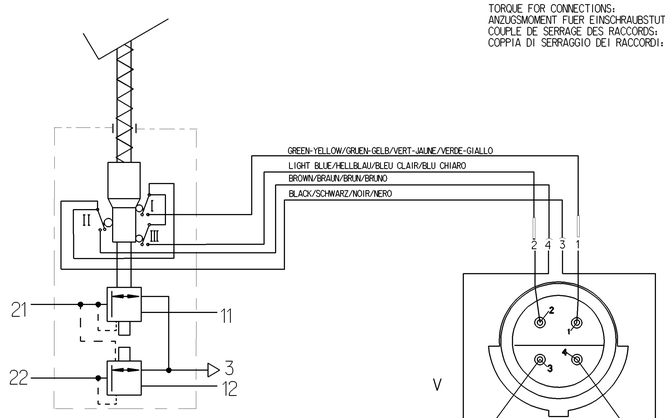

(E)

General Specification: JED-334-1 , Size ISO 14405 LP							
Further Technical Data: 461 318 001 0							
Doc., Code: 035						Sheet: 1 To	
General Tolerances JED-261							
		Range of Nominal Dimensions (in mm)					
Class ↓	↓	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
Fine		0.5	1.0	1.5	2.0		
Medium	X	1.0	2.0	3.0	4.0	±5°	
Coarse		2.0	3.5	5.0	6.5		
Tapped Holes acc., ISO 4029 / JED-152							
↓ Tolerance Class Applied Crossmarked							

Copyright WABCO®
Date | Signature
Drawn: 2015-06-04 RAJASEKARAN
Checked: 2015-07-17 Adamski
Export: ADAMSKI
Mass: 3.5 kg
Scale: 1:1 1:2
Size: A0
CAD System: CREO

WABCO

BRAKE VALVE 26/20°
MOTORWAGEN-BREMSVENTIL
ROBINET DE FREINAGE
DISTRIBUTORE DI COMANDO

Material No.: 461 318 001 0
Date of first issue.: Doc.Code: 005 | Language: ML | Sheet: 1/1
ECN-No.: 165931 | Revision: 5 | Techn. Resp.: E | Replacement for: 5182
100mm

Die Übermittlung sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Any communication or reproduction of this document, and the use or communication of its contents, not expressly authorized are prohibited. Offenders are liable for the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Toute communication ou reproduction de la présente, toute exploitation ou communication non autorisée de son contenu sont interdites. Les contrevenants sont tenus à réparation. Tous droits réservés pour le cas de la délivrance d'un brevet ou l'enregistrement d'un modèle d'utilité ou d'un dessin ou modèle.

Ogni trasmissione o riproduzione di questo documento, ogni sfruttamento e comunicazione del suo contenuto non espressamente autorizzati sono proibiti. I trasgressori sono tenuti al risarcimento dei danni. Tutti i diritti sono riservati in caso di concessione di brevetto, di registrazione di modello di utilità o di disegno o modello.