



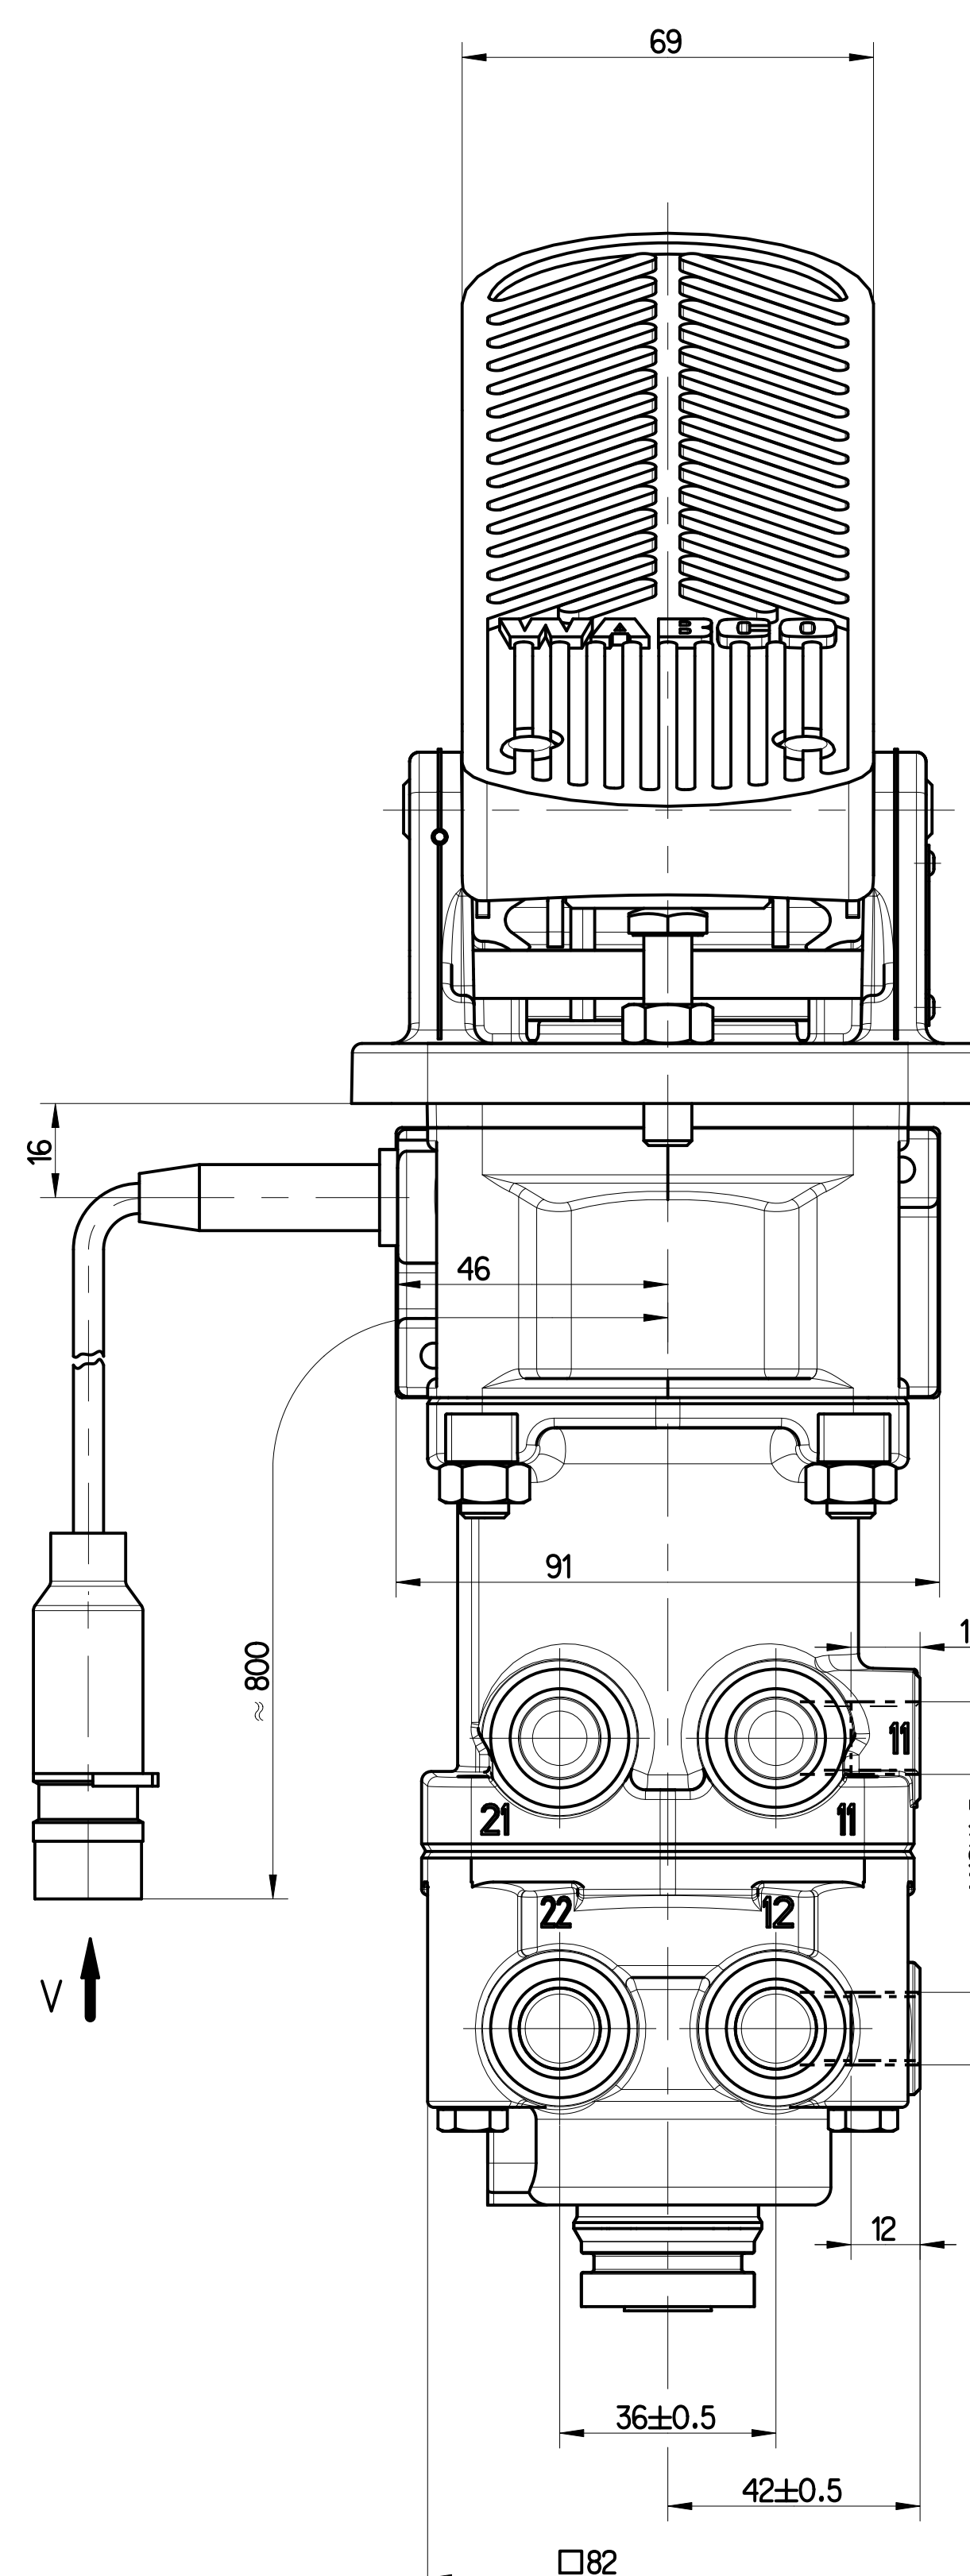

VIEW X

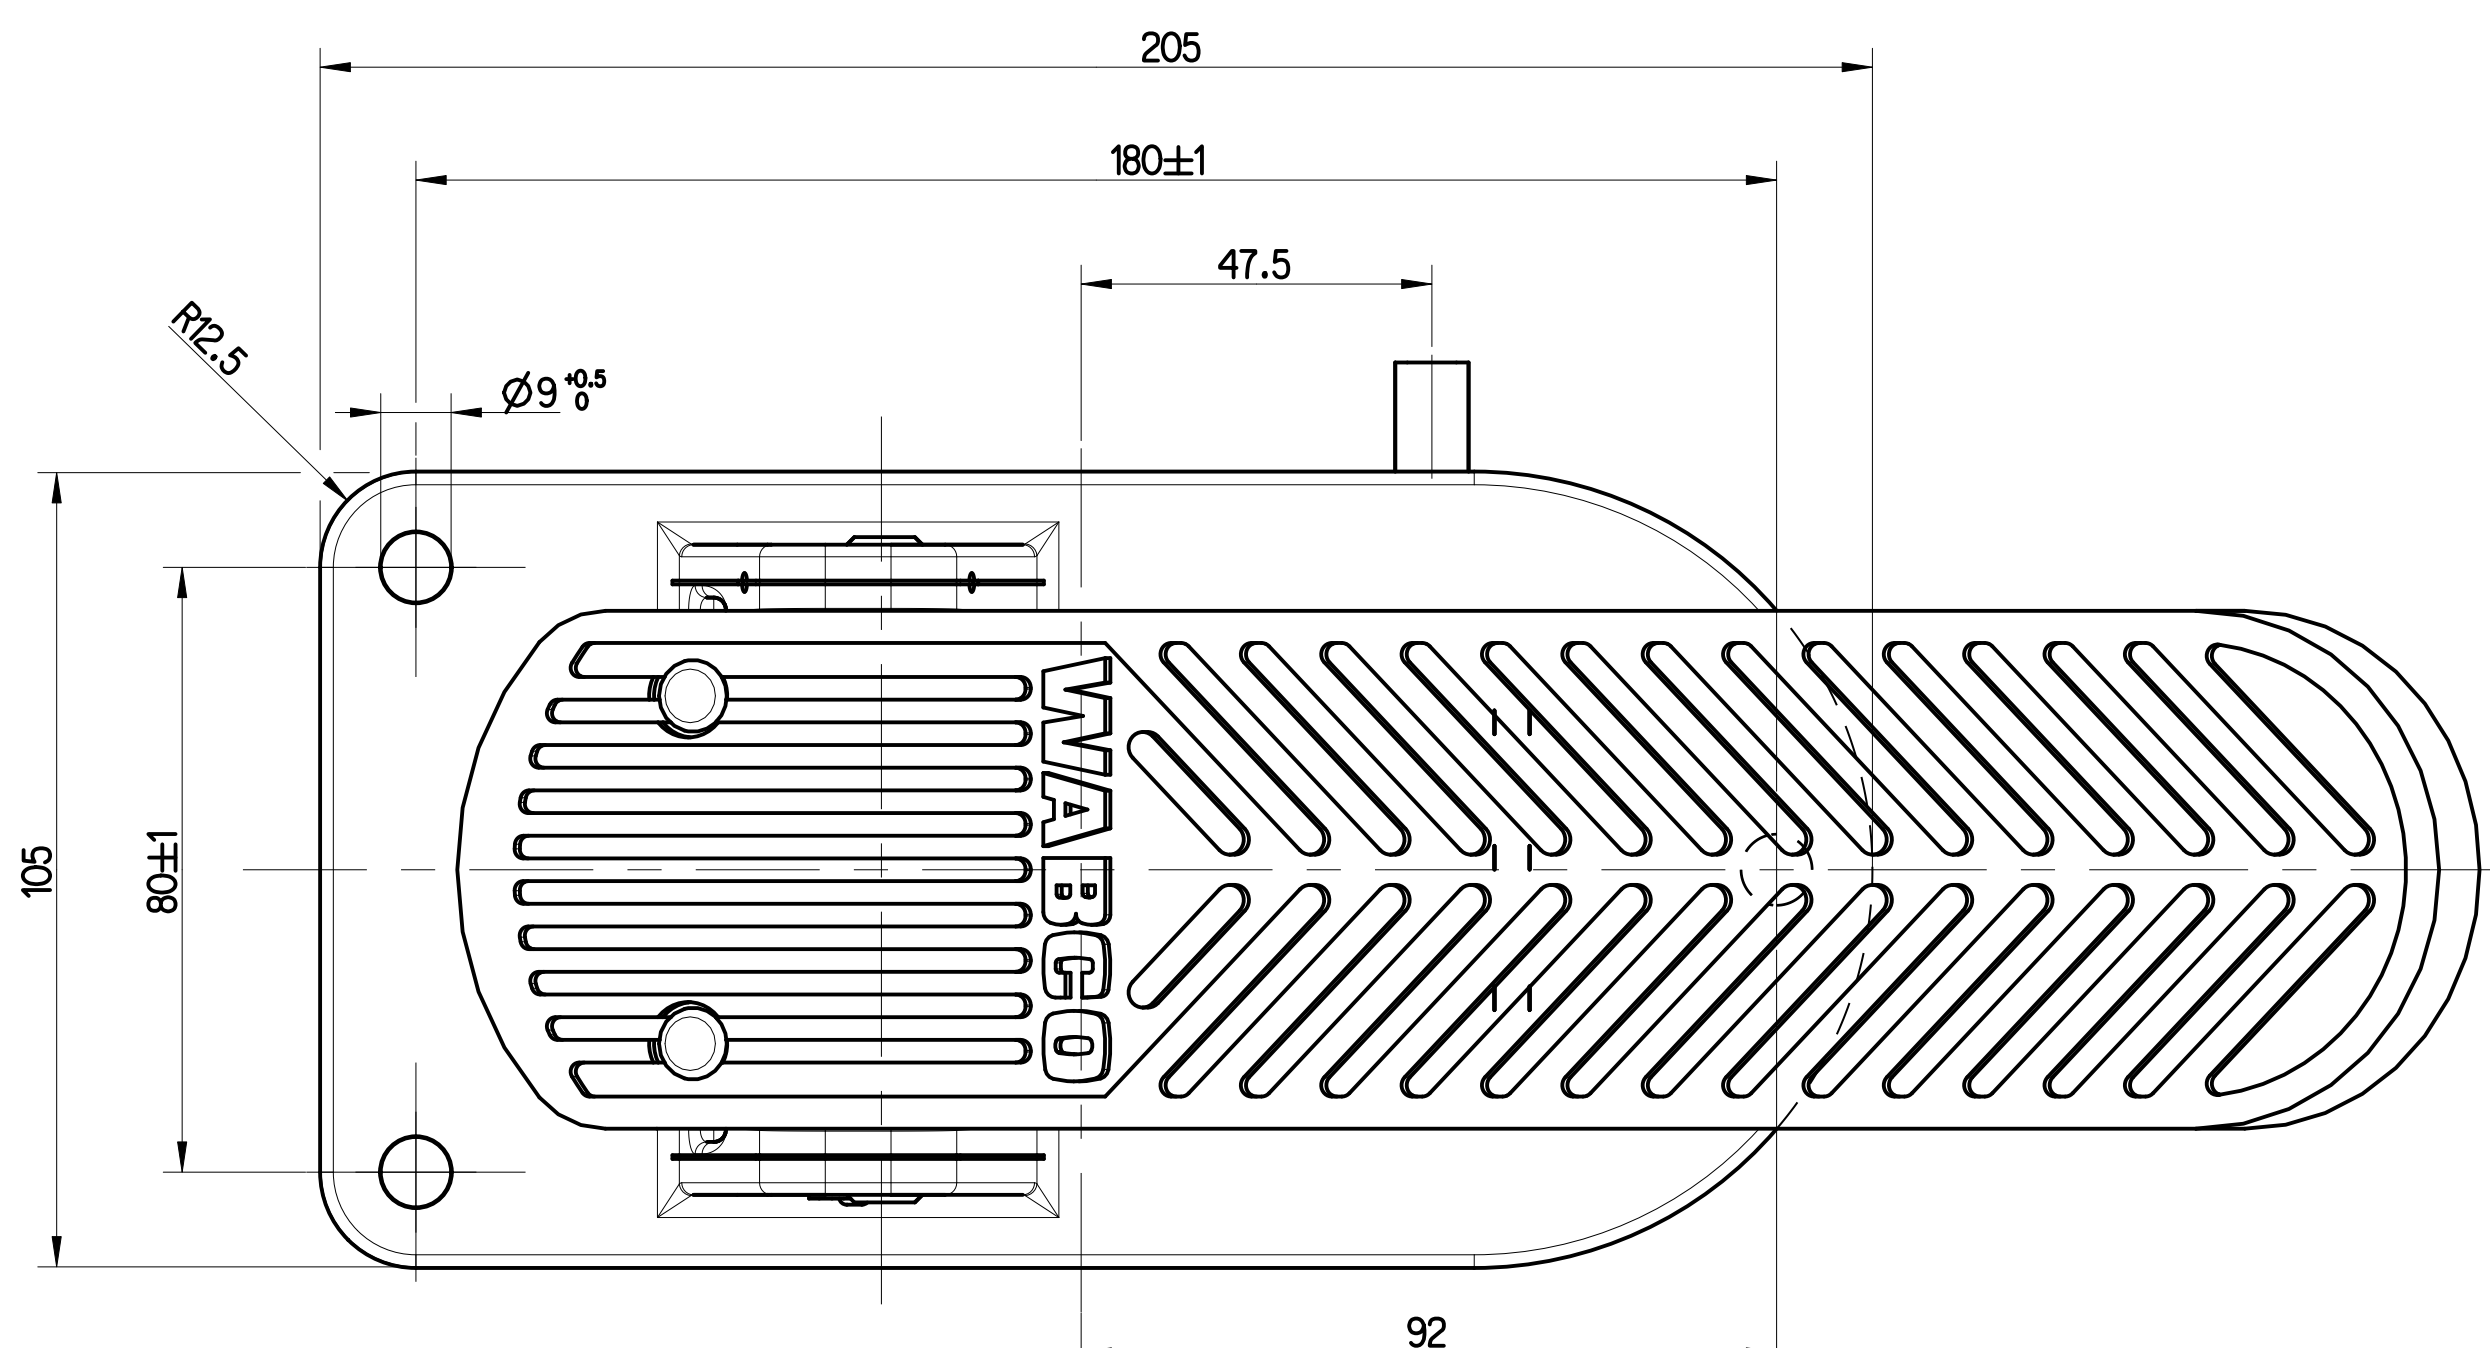

SWITCH ON POINT OF SWITCH I ———
EINSCHALTPUNKT SCHALTER I
POINT DE FERMETURE DU CONTACTEUR I
PUNTO DI CHIUSURA DEL INSERITORE I

— PULL OFF POINT (MECHANICAL)
 DRUCKPUNKT (MECHANISCH)
 POINT DE POUSSEE (MECANIQUE)
 PUNTO DI RESISTENZA (MECCANICO)



NOMINAL DIAMETER :
NENNWEITE : 78.5 mm $\triangleq$ $\varnothing 10$ mm
DIAMETRE NOMINAL :
DIAMETRO NOMINALE :

```

:
: pe = MAX.8.5 bar
:
:


```

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C . . . +80°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE
DEVICE DIATES MAX. 45° FROM VERTICAL)
EINBAUlage: ENTLUEFTUNG NACH UNTEREN ACHE DES GERÄTES MAX. 45° VON
DER SENKRECHTEN ABWICHEND)
POSITION D'INSTALLATION: ÉCHAPPEMENT VERS LA BAS (ÉCART DE L'AXE MÉDIAN
DE L'APPAREIL PAR RAPPORT À LA VERTICALE: 45° MAX.
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO(DEVIAZIONE ASSI APPARECCHIO
RISPETTO ALLA VERTICALE: MAX. 45°)

SWITCH LOAD I, II, III : AT 24 V -1 A (INDUCTIVE LOAD)
 SCHALTERBELASTUNG I, II, III : BEI 24 V - 1 A (INDUKTIVE LAST)
 CHARGE DU CONTACTEUR I, II, III : A 24 V - 1 A (CHARGE INDUCTIVE)
 CARICO DELL'INSERTORE I, II, III : A 24 V - 1 A (CARICO INDUTTIVO)

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: M=MAX. 21 Nm
COUPLE DE SERRAGE DES RACCORDS: M16x1.5: M=MAX. 34 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

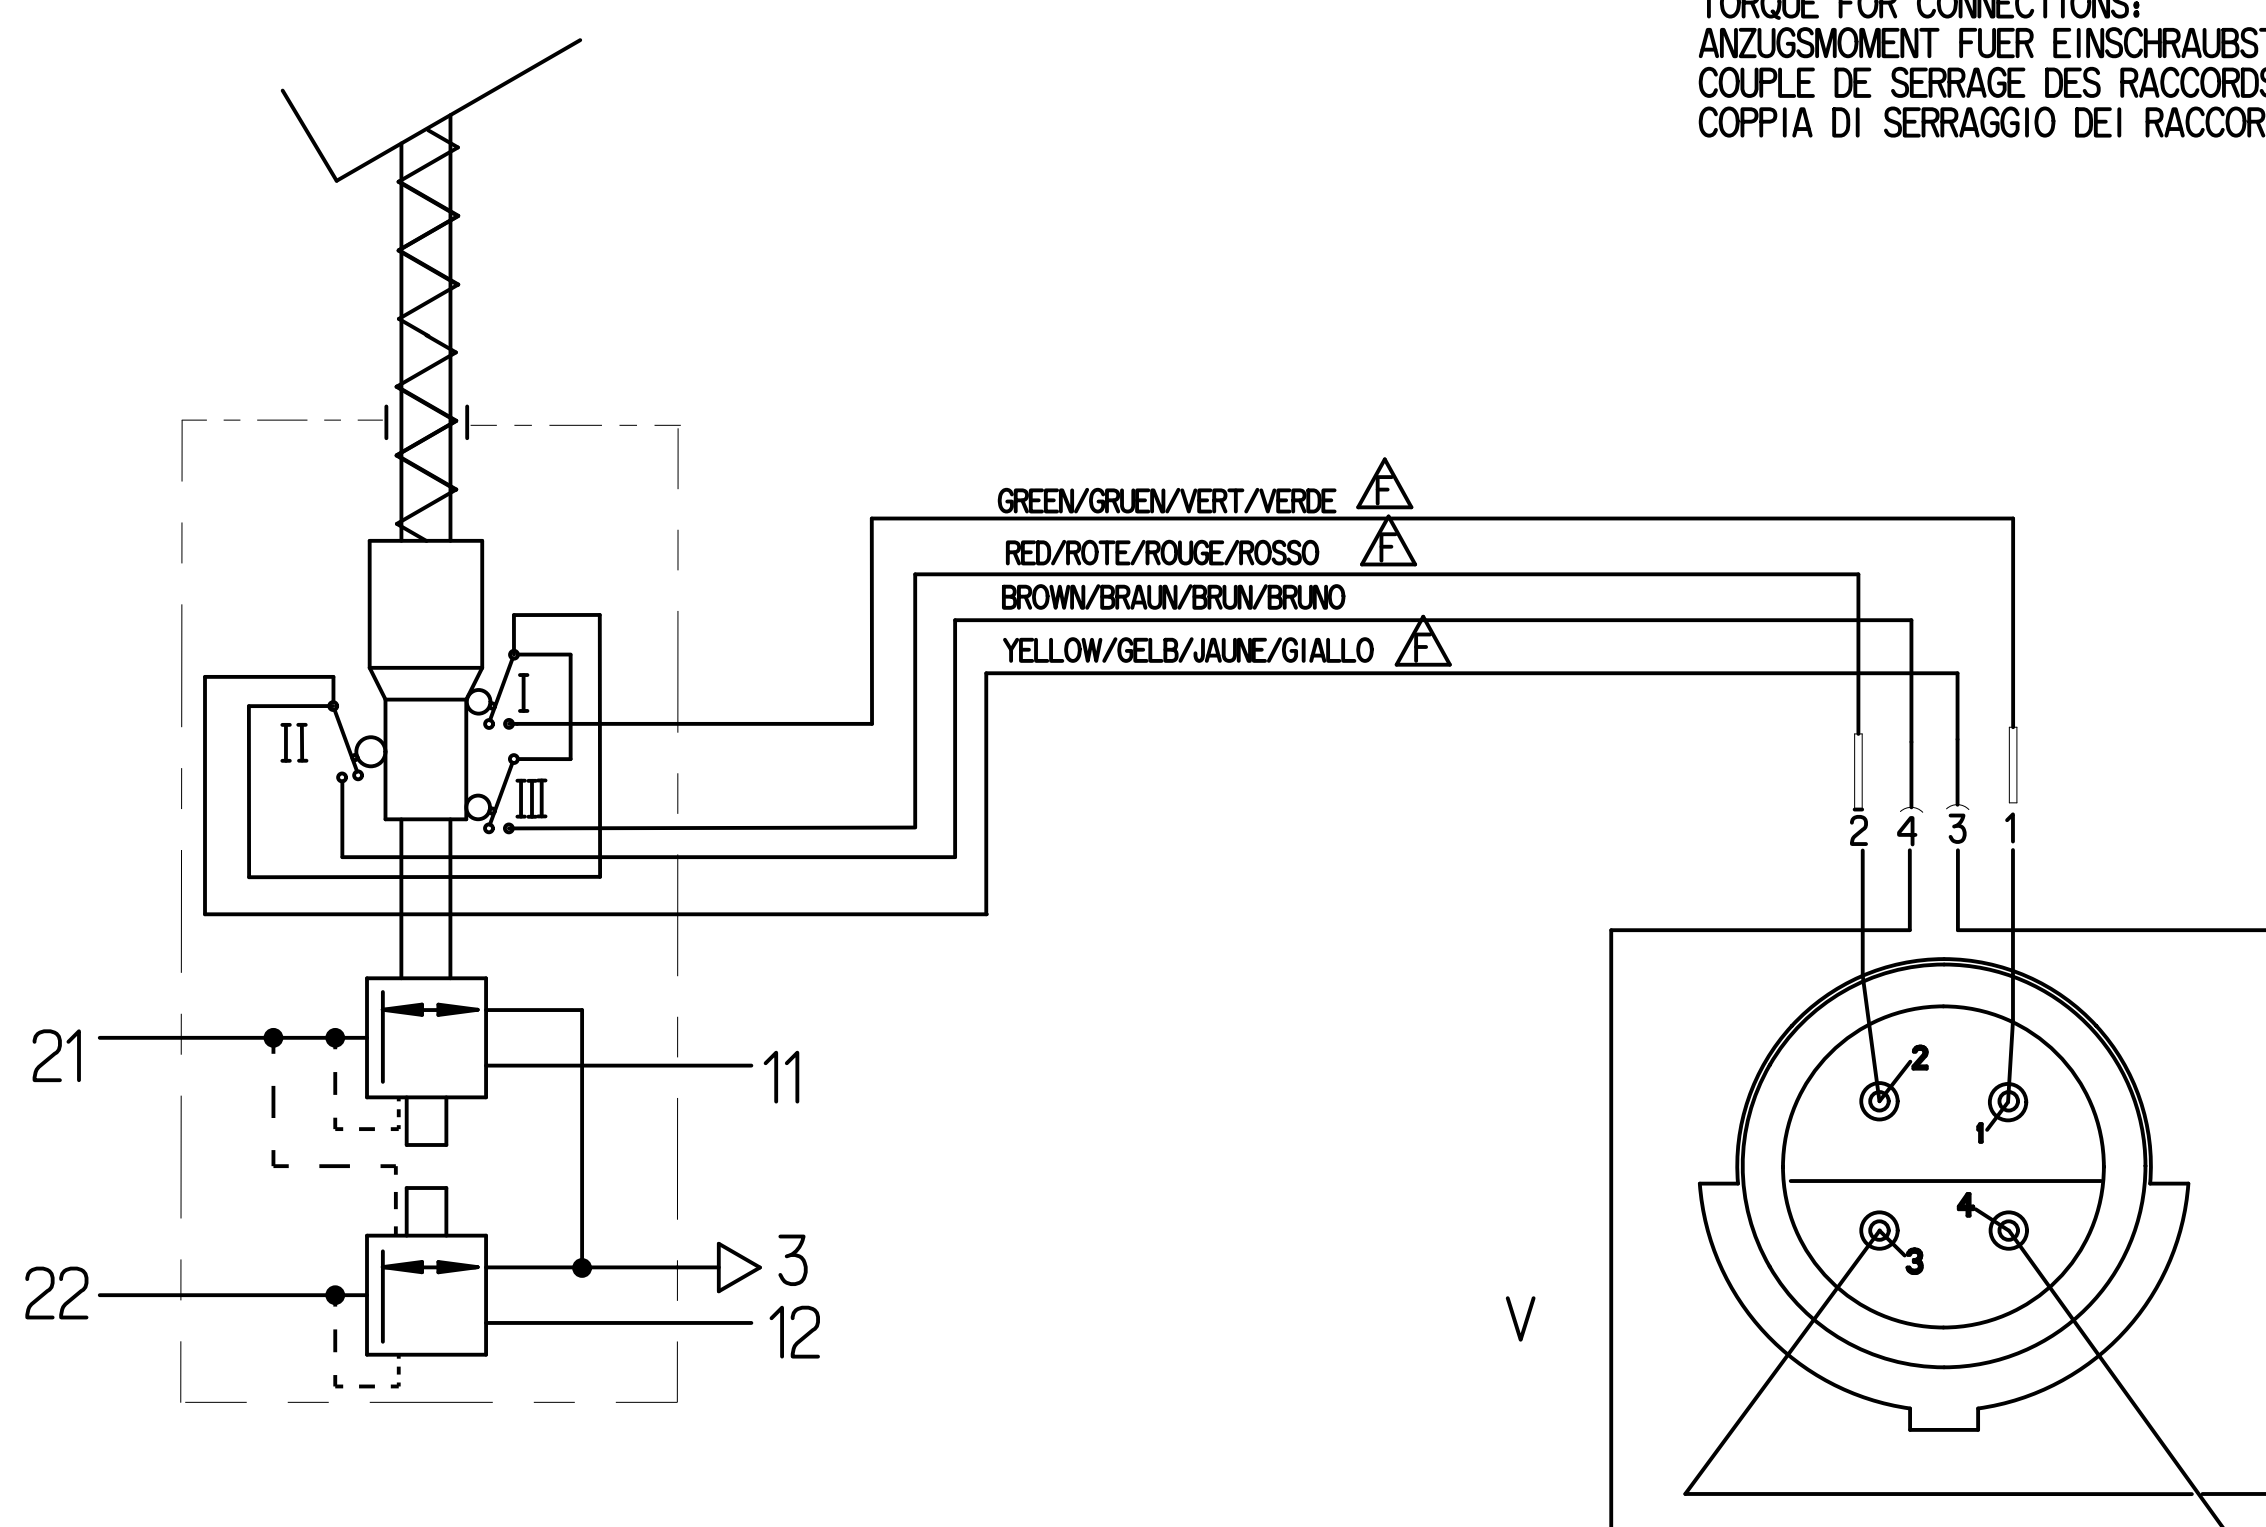[illegible]