
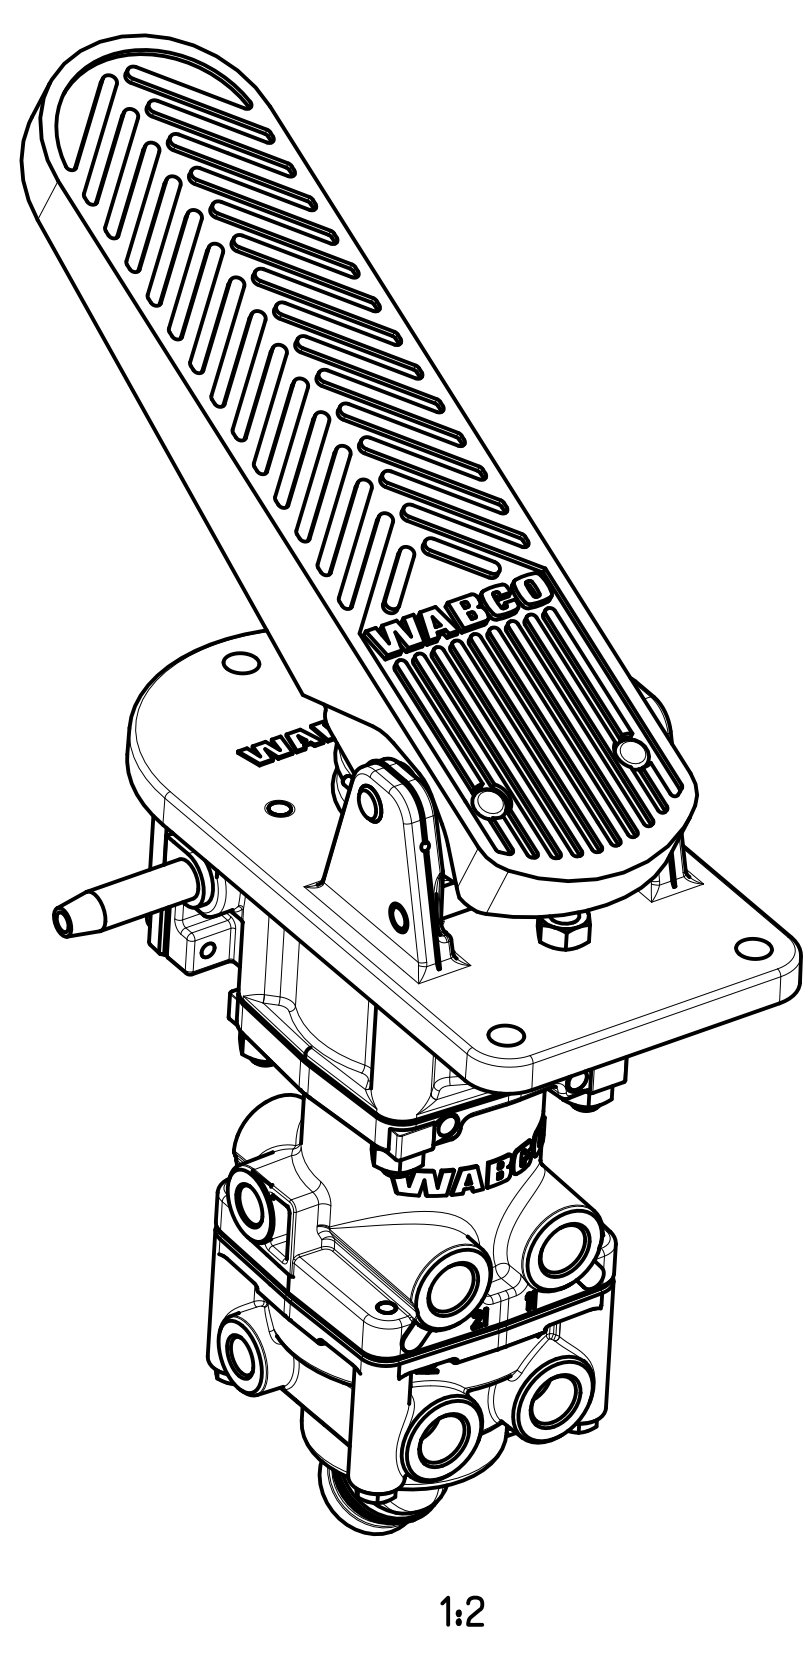
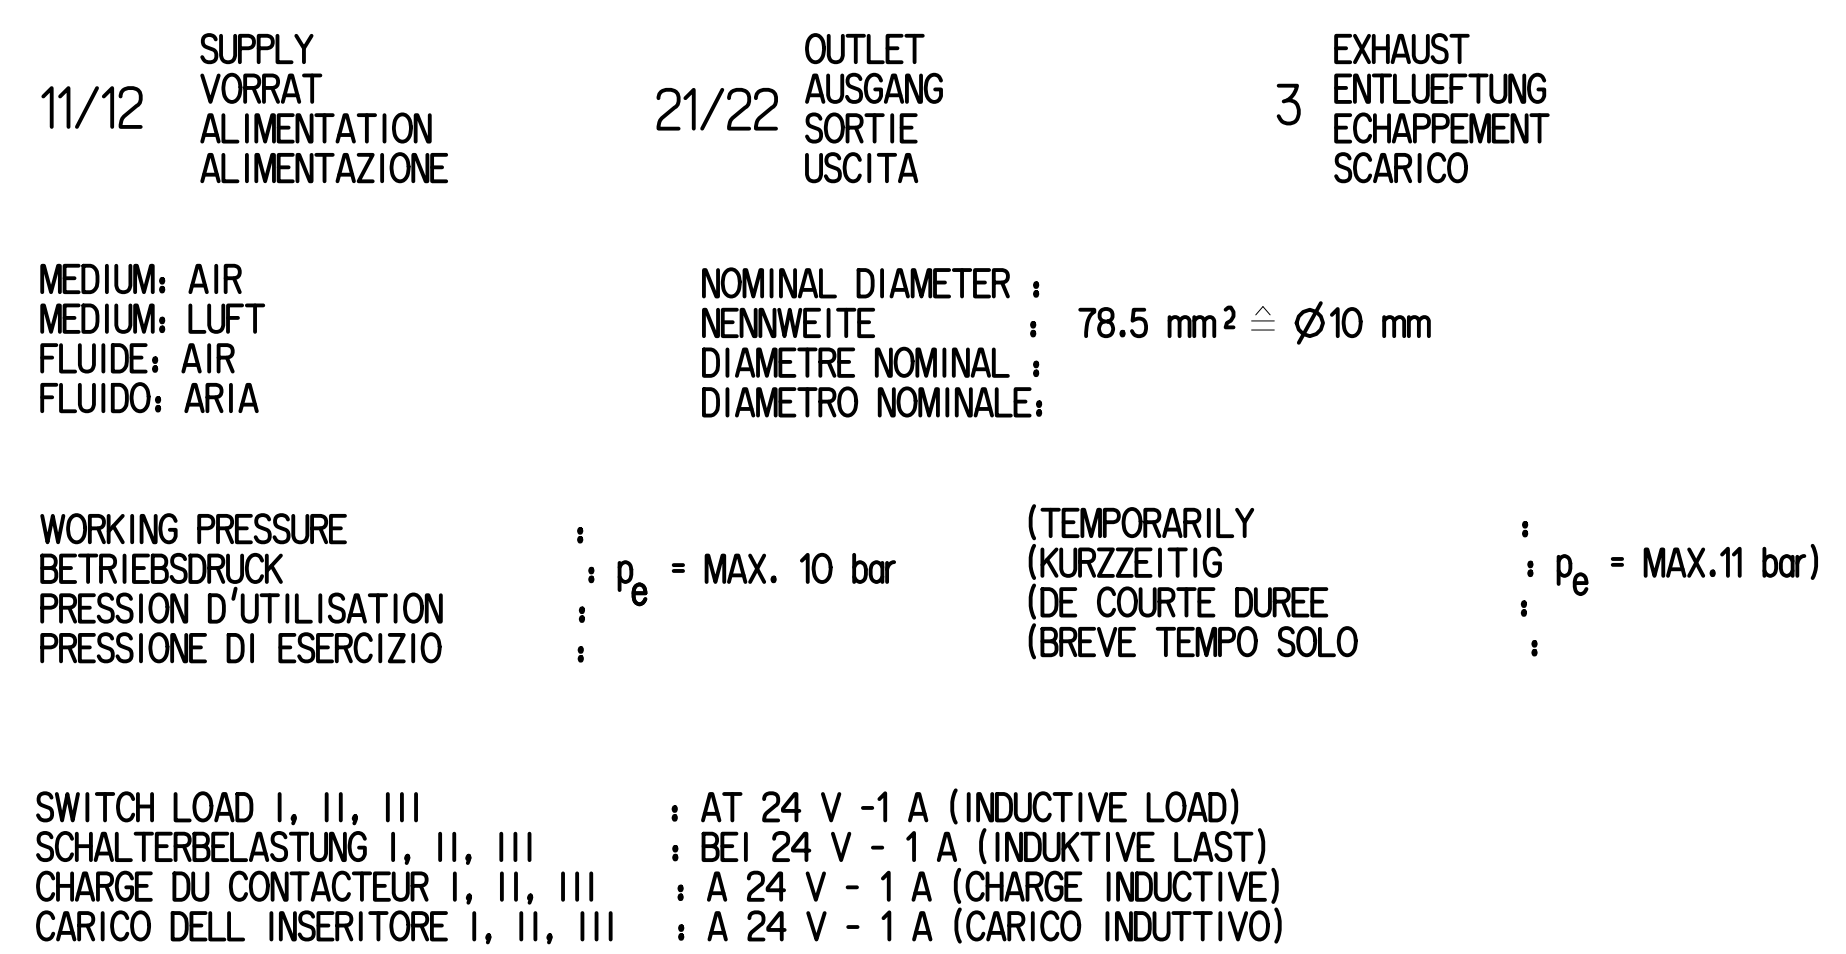
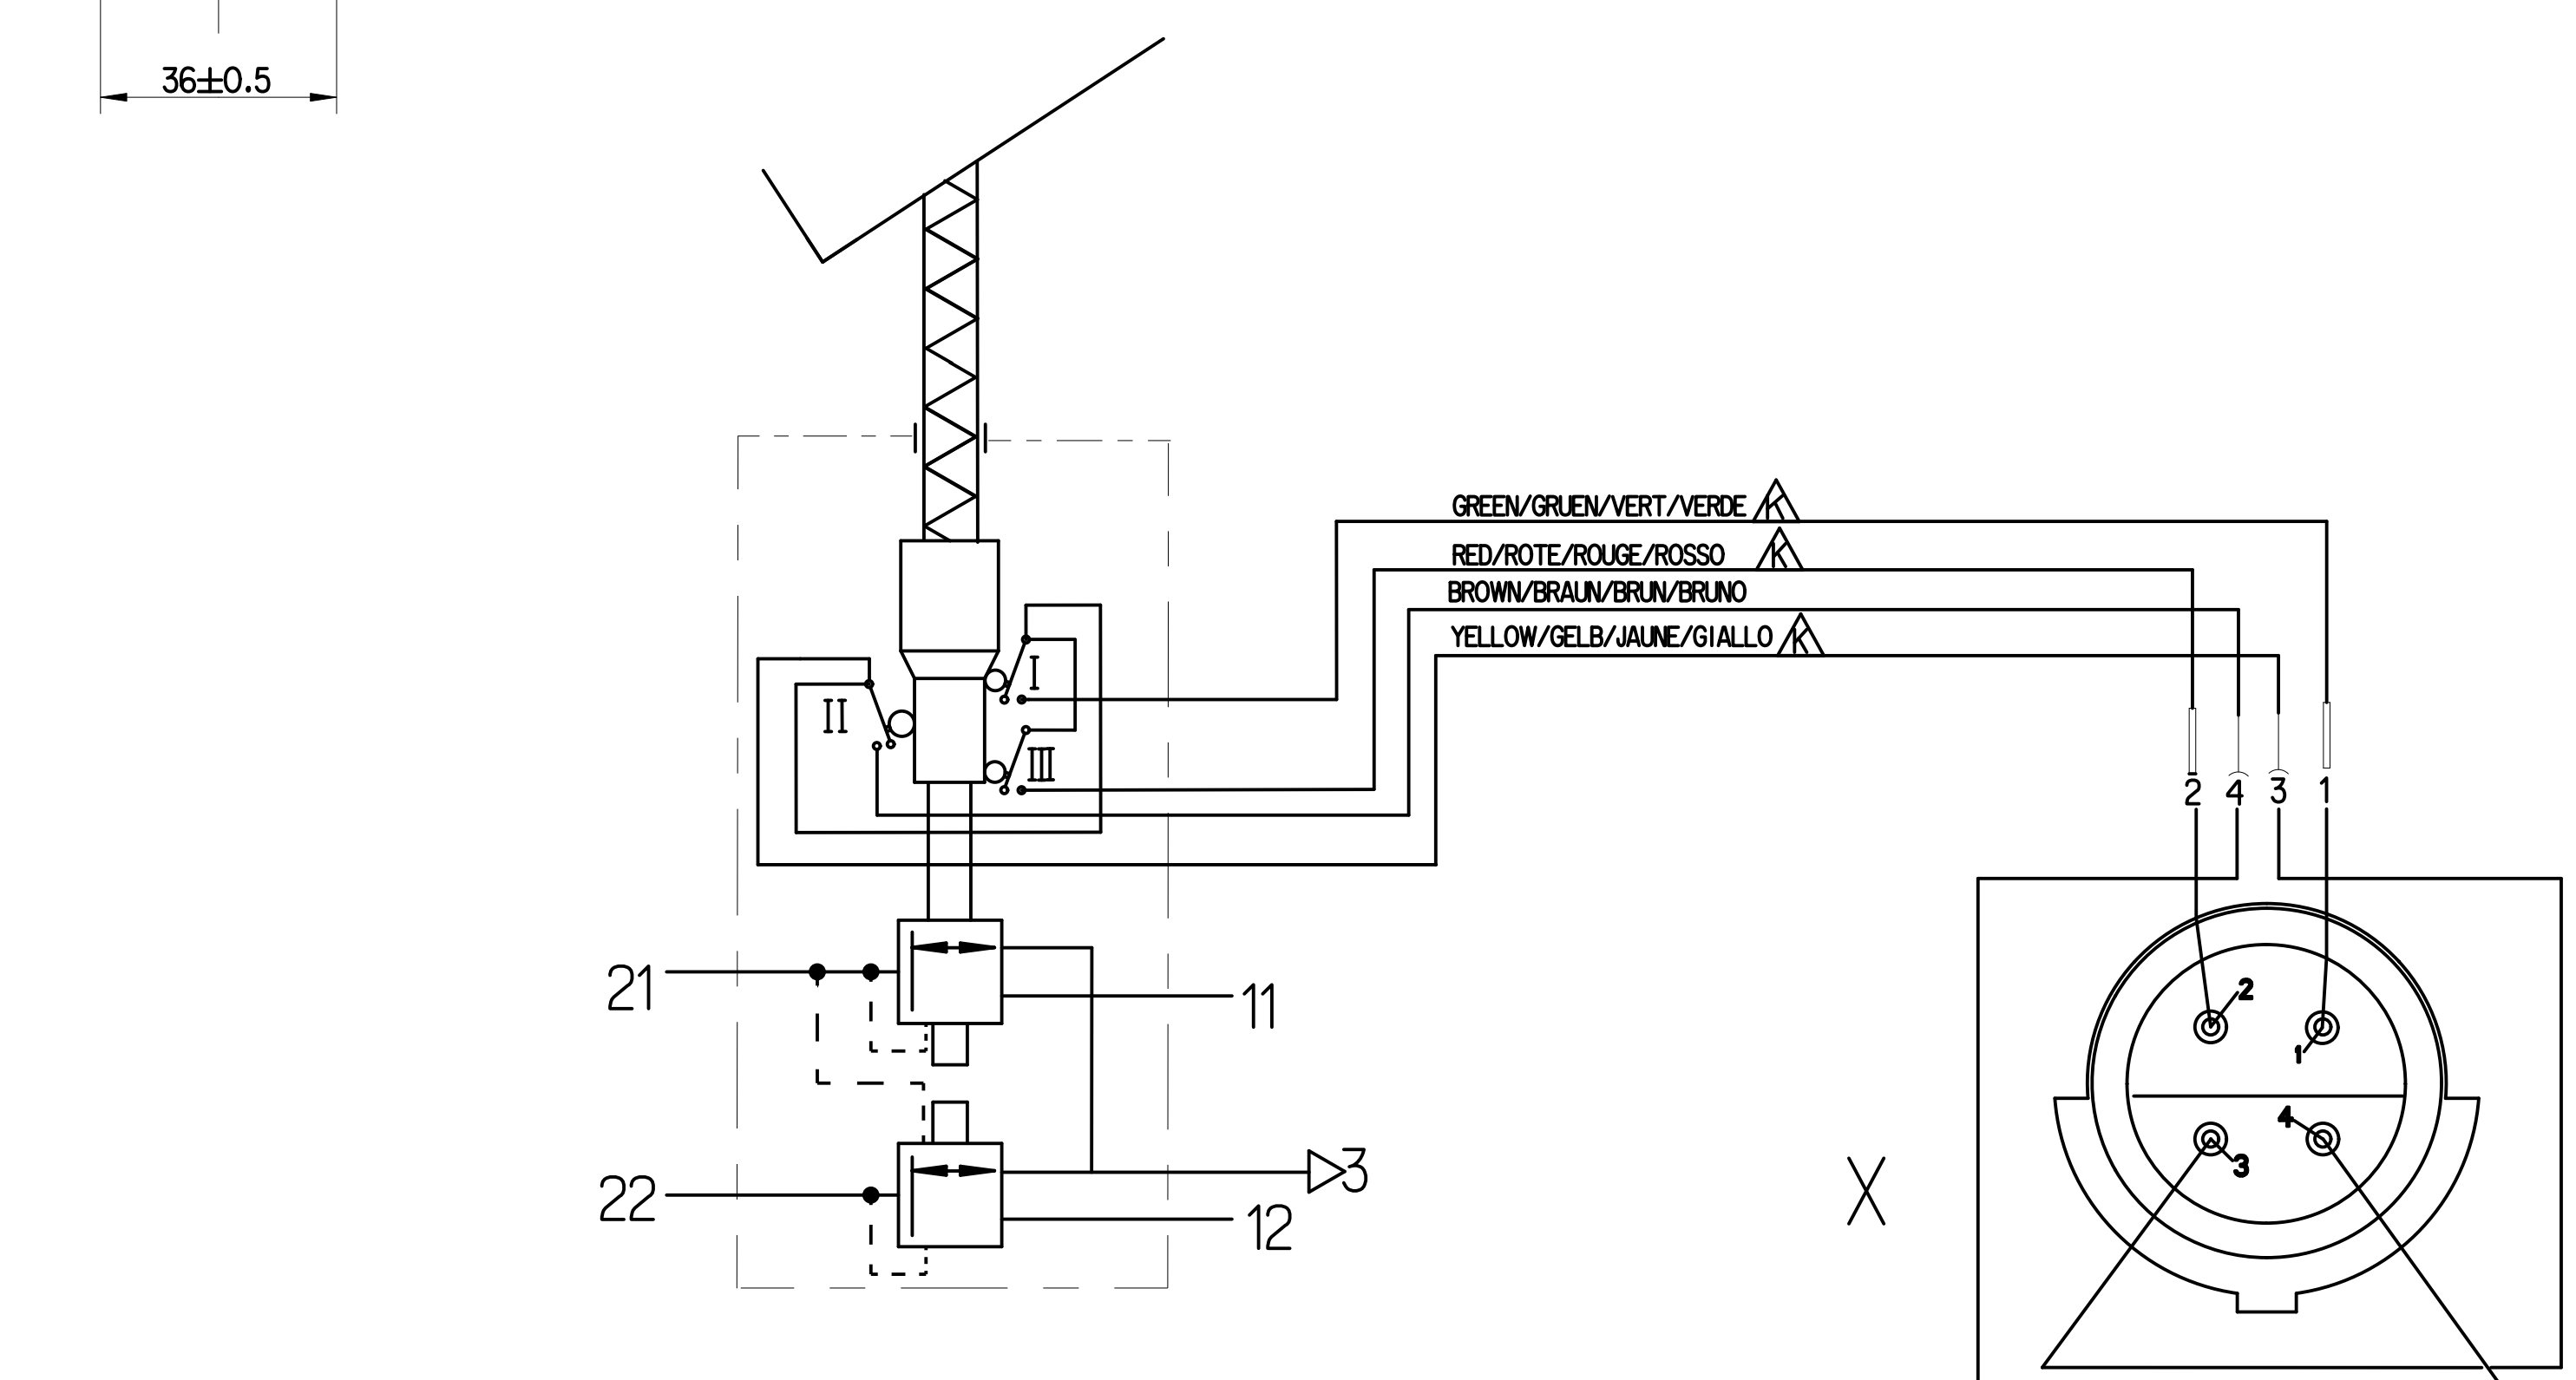
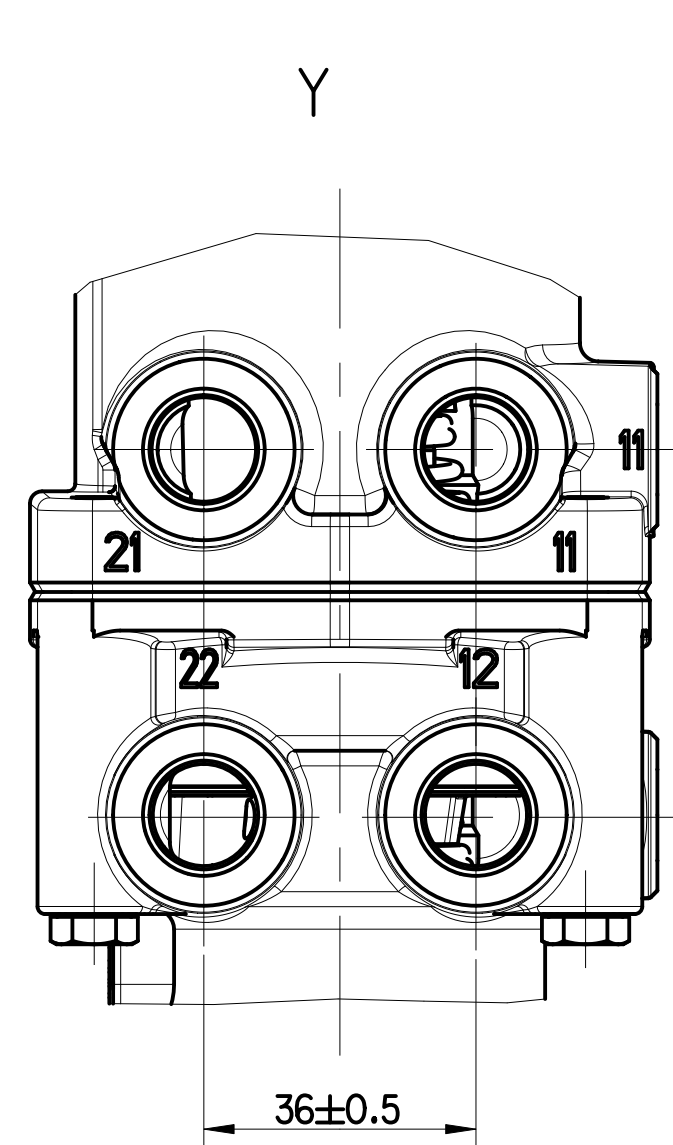
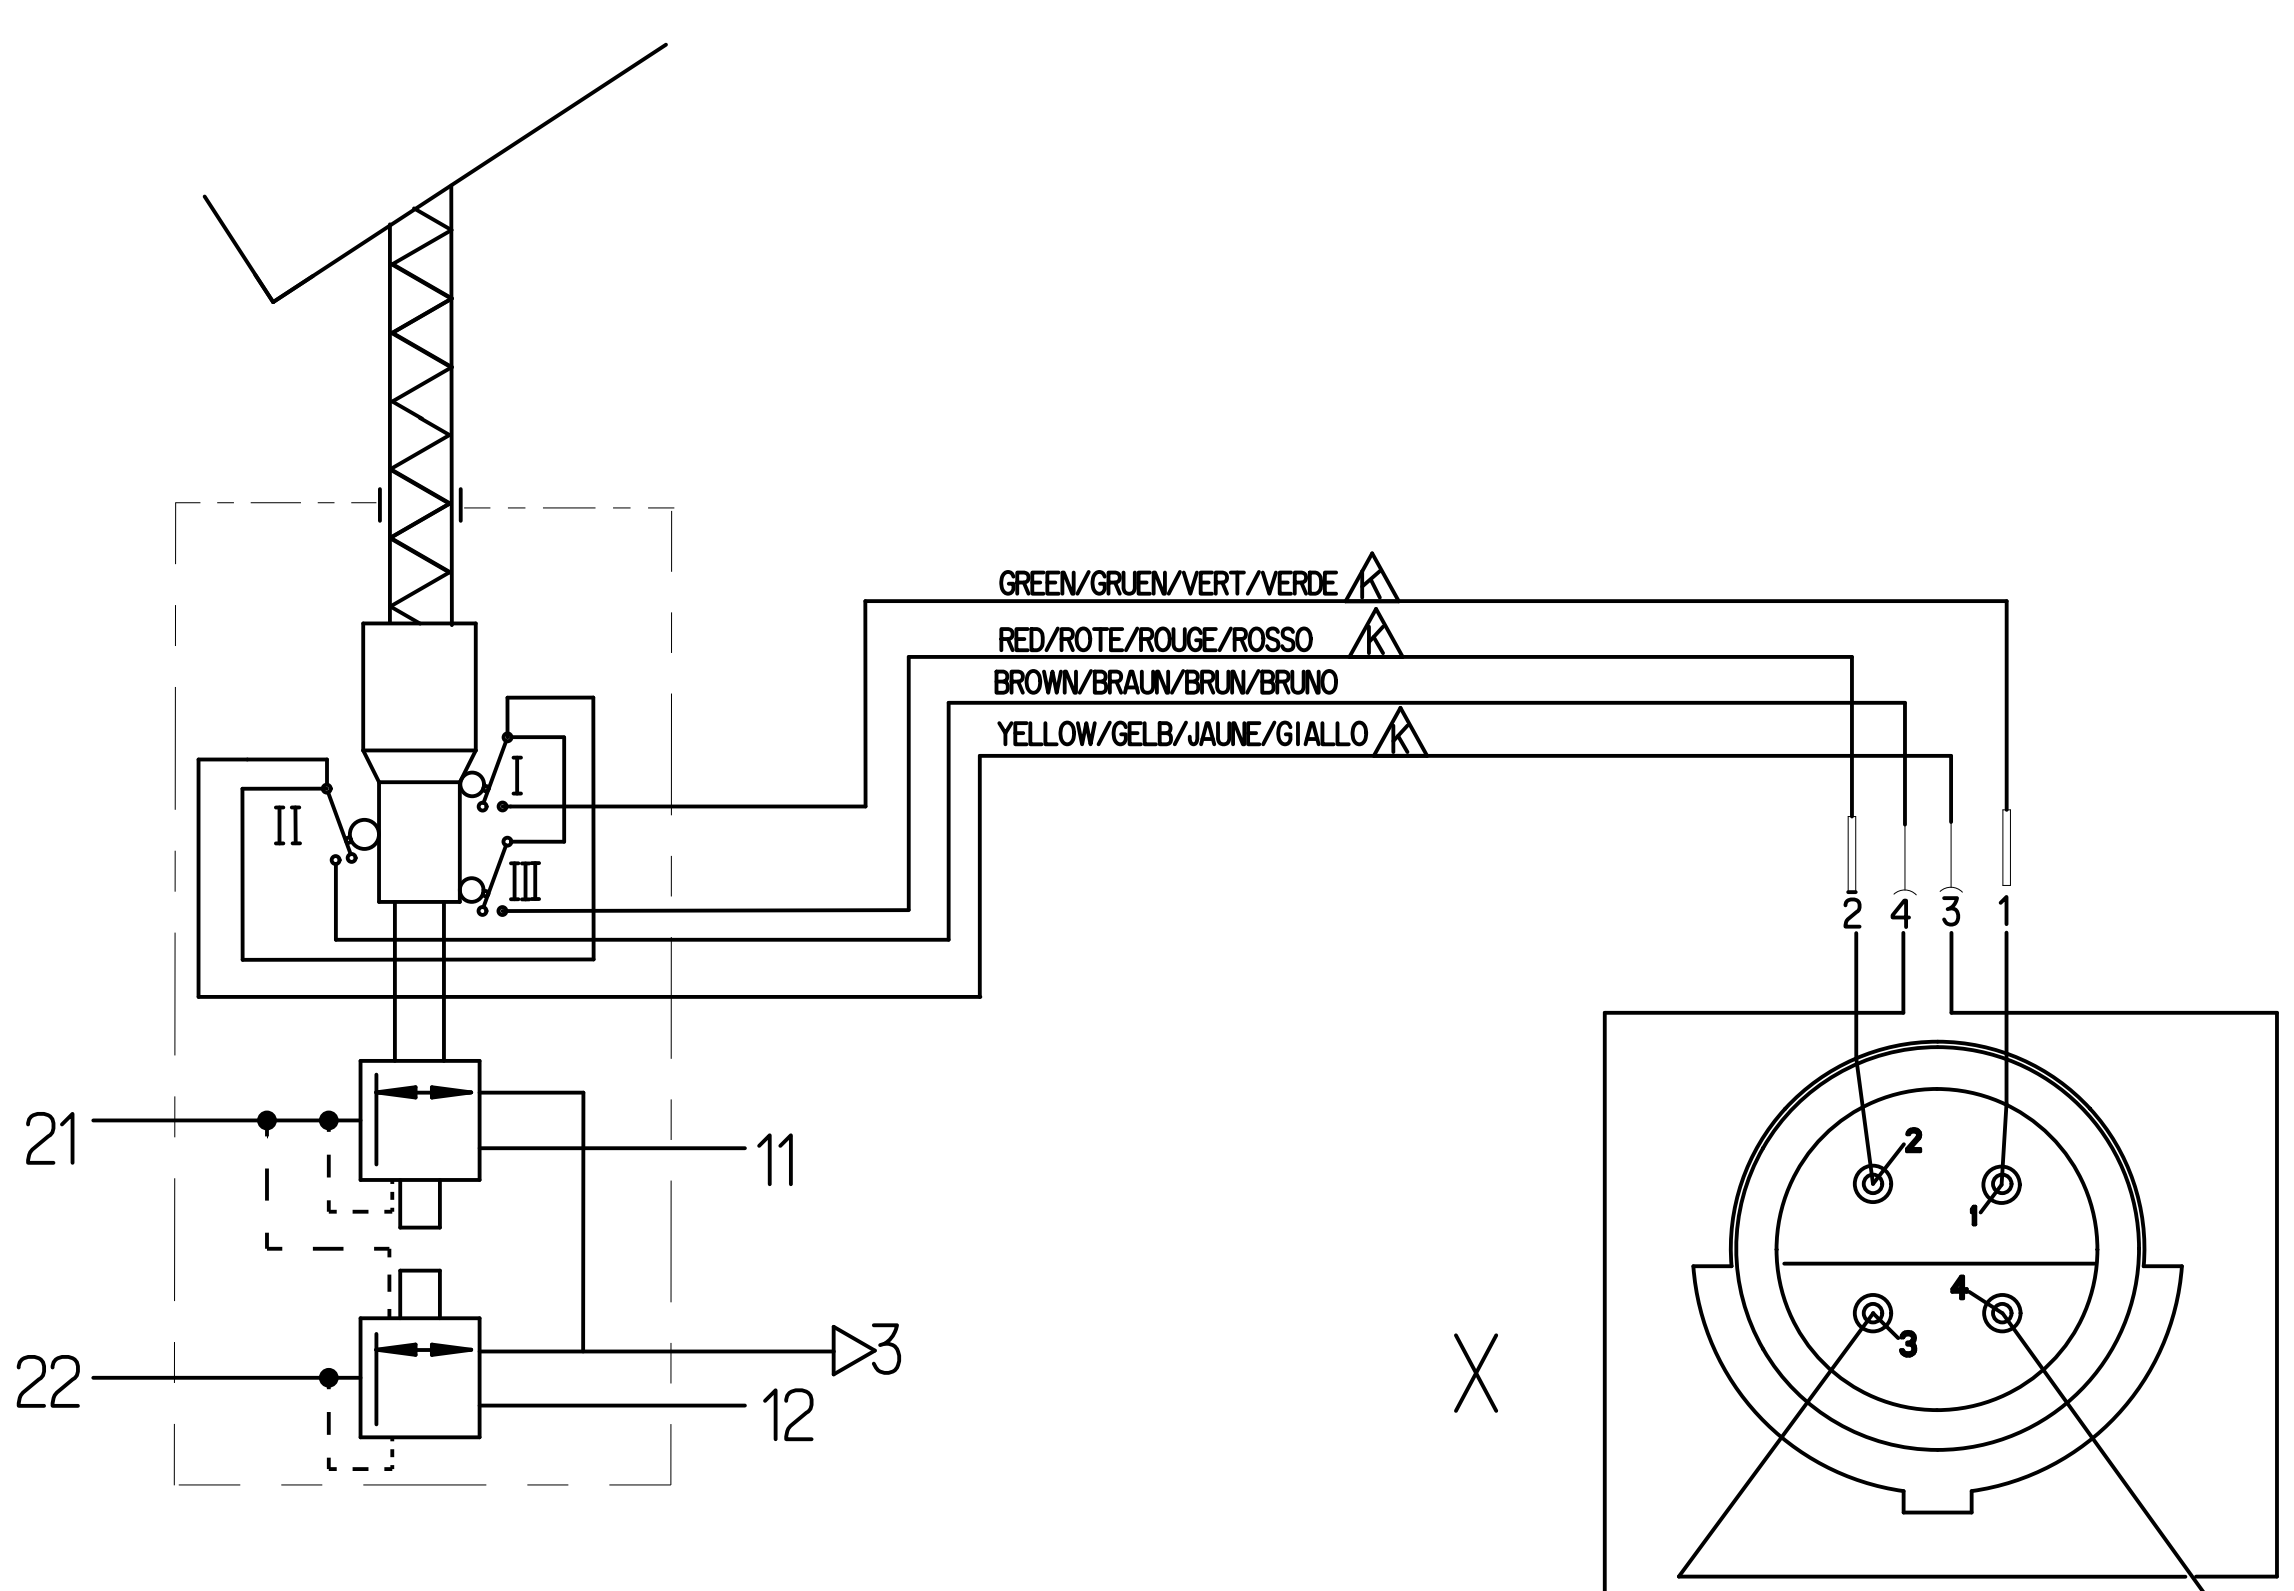


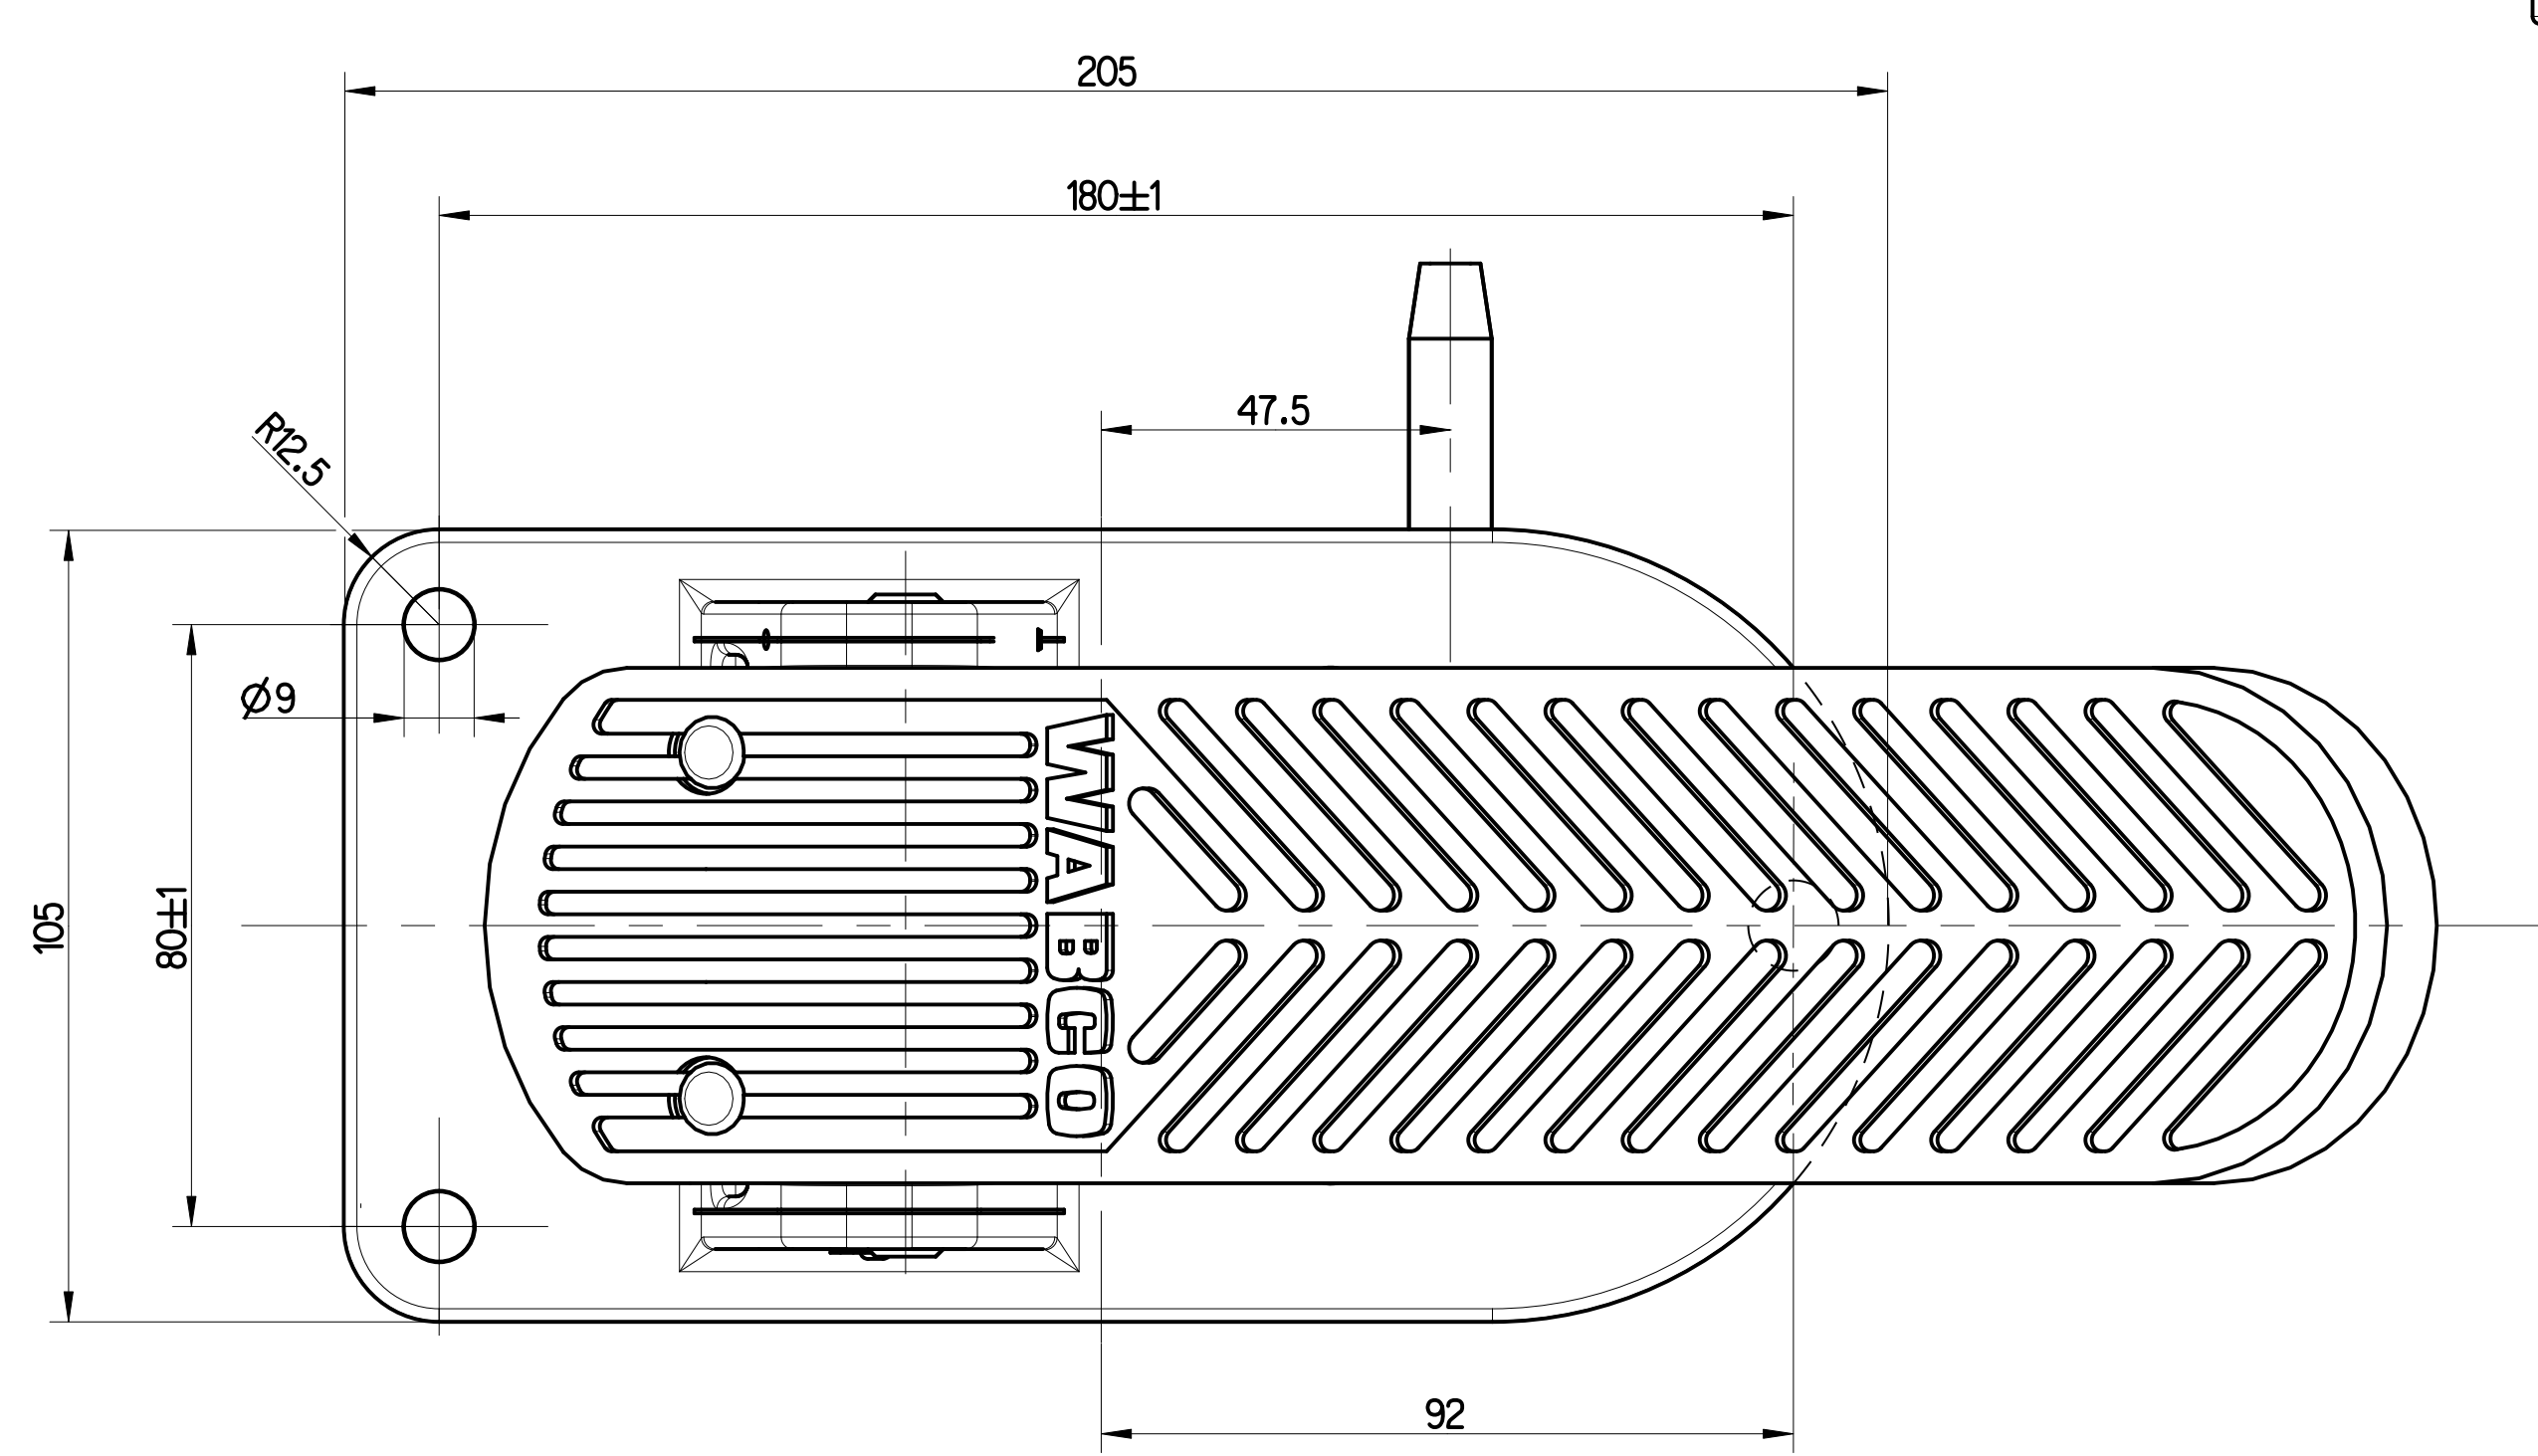

INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE
DEVICE DEVIATES MAX. $\pm 45^\circ$ FROM VERTICAL)
EINBAULAGE: ENTLÜFTUNG NACH UNTEN (MITTELACHSE DES GERÄTES MAX. $\pm 45^\circ$ VON
DER SENKRECHTEN ABWEICHEND)
POSITION D'INSTALLATION: ÉCHAPPEMENT VERS LA BAS (L'AXE MÉDIAN
DE L'APPAREIL FAIT RAPPORT À LA VERTICALE: $\pm 45^\circ$ MAX.)
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO (DIREZIONE DELL'ASSE APPARECCHIO
RISPETTO ALLA VERTICALE: MAX. $\pm 45^\circ$)

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FÜR EINSCHRAUBSTÜTZEN : M12X1,5: M-MAX. 21 Nm
COUPLE DE SERRAGE DES RACCORDS: M16X1,5: M-MAX. 34 Nm
COPIA DI SERRAGGIO DEI RACCORDI:

[illegible]